



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH50M 1216-98638
Component
Rear Right Wheel Hub
Fluid
LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0268210	LH0263933	LH0245050
Sample Date		Client Info		25 Jan 2024	17 Aug 2023	29 Mar 2023
Machine Age	hrs	Client Info		13406	12191	11277
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>745	28	23	28
Chromium	ppm	ASTM D5185m	>4	0	0	0
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>4	<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	0	1
Lead	ppm	ASTM D5185m	>4	0	0	0
Copper	ppm	ASTM D5185m	>130	2	4	4
Tin	ppm	ASTM D5185m	>3	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>160	1	2	2
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	<1
Boron	ppm	ASTM D5185m	0	<1	2	3
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	<1	0	7	4
Calcium	ppm	ASTM D5185m	<1	21	29	30
Phosphorus	ppm	ASTM D5185m	2143	799	740	935
Zinc	ppm	ASTM D5185m	<1	8	20	13
Sulfur	ppm	ASTM D5185m	23468	21473	22251	25056
Visc @ 40°C	cSt	ASTM D445	170	121	123	137

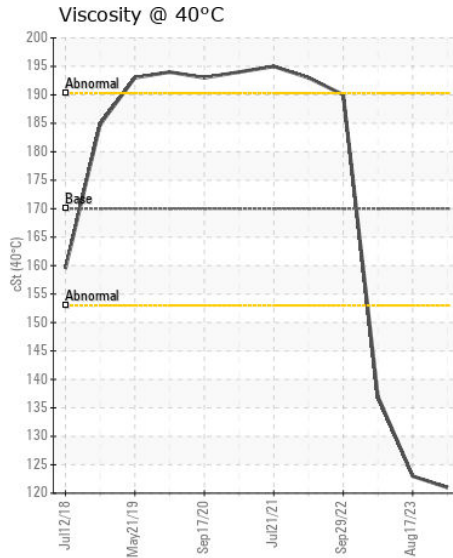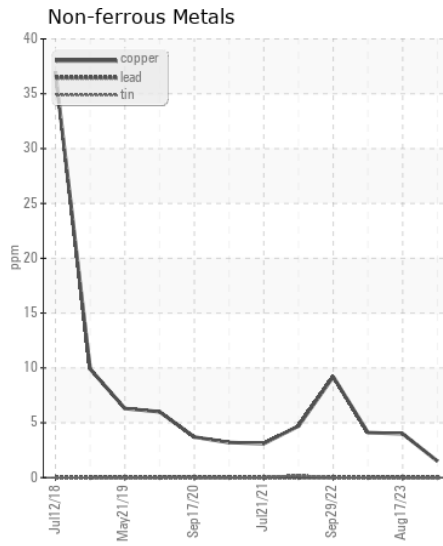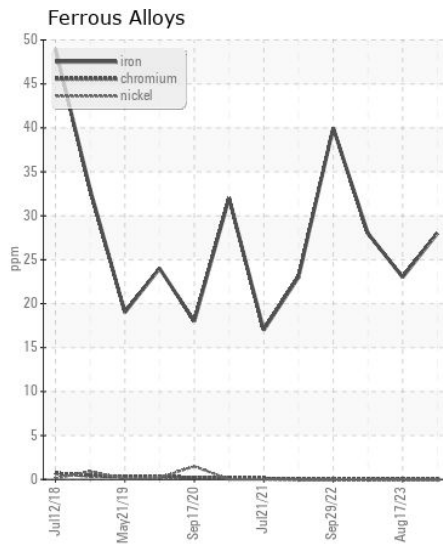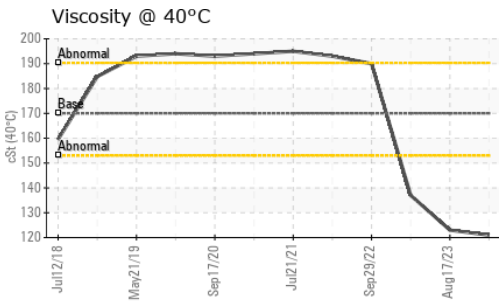

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0268210 **Received** : 30 Jan 2024
Lab Number : 06075190 **Diagnosed** : 01 Feb 2024
Unique Number : 10857281 **Diagnostician** : Sean Felton
Test Package : CONST

AMERICAN STATE EQUIPMENT CO.
 2055 SOUTH 108TH STREET
 MILWAUKEE, WI
 US 53227
 Contact: RAY SCHMIDT
 RSCHMIDT@AMSTATE.COM
 T: (414)234-0854
 F: (414)541-1892

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)