



LIEBHERR

OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
LIEBHERR LH50M 1216-98638
Component
Front Right Wheel Hub
Fluid
LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | LH0268266 | LH0263935 | LH0245049 |
| Sample Date | | Client Info | | 25 Jan 2024 | 17 Aug 2023 | 29 Mar 2023 |
| Machine Age | hrs | Client Info | | 13406 | 12191 | 11277 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Changed | Changed | N/A |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >745 | 79 | 93 | 90 |
| Chromium | ppm | ASTM D5185m | >4 | <1 | 1 | <1 |
| Nickel | ppm | ASTM D5185m | >2 | 1 | 2 | 1 |
| Titanium | ppm | ASTM D5185m | >4 | <1 | <1 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | <1 | <1 | 2 |
| Lead | ppm | ASTM D5185m | >4 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >130 | 4 | 7 | 4 |
| Tin | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION





There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >160 | 3 | 5 | 6 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 2 | 0 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|-------|--------------|-------|-------|
| Sodium | ppm | ASTM D5185m | | 0 | 0 | 1 |
| Boron | ppm | ASTM D5185m | 0 | 1 | 2 | 2 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0 | <1 | <1 | 0 |
| Manganese | ppm | ASTM D5185m | 0 | <1 | <1 | 1 |
| Magnesium | ppm | ASTM D5185m | <1 | 0 | 8 | 5 |
| Calcium | ppm | ASTM D5185m | <1 | 25 | 32 | 34 |
| Phosphorus | ppm | ASTM D5185m | 2143 | 819 | 824 | 1070 |
| Zinc | ppm | ASTM D5185m | <1 | 13 | 24 | 13 |
| Sulfur | ppm | ASTM D5185m | 23468 | 22379 | 22881 | 25056 |
| Visc @ 40°C | cSt | ASTM D445 | 170 | 120 | 126 | 140 |

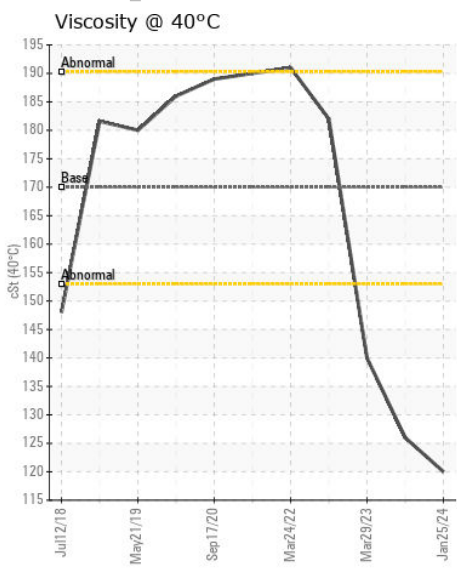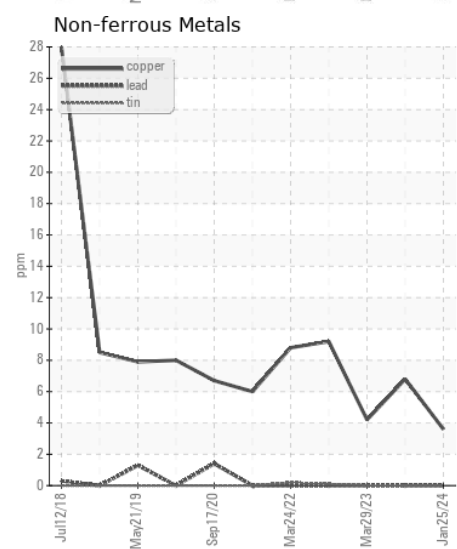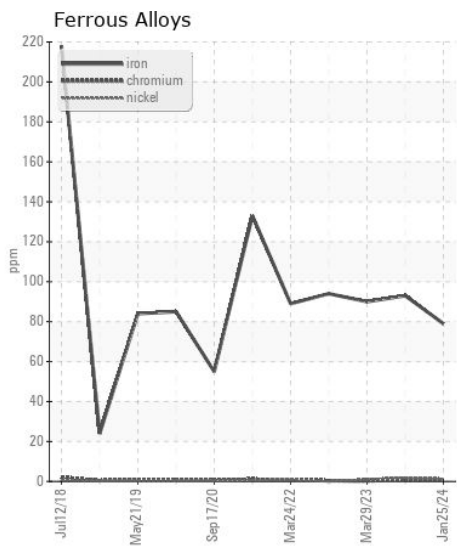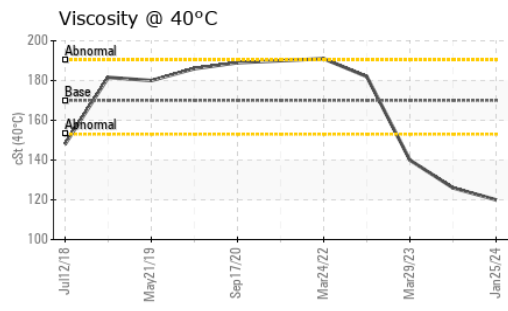

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0268266 **Received** : 30 Jan 2024
Lab Number : 06075195 **Diagnosed** : 01 Feb 2024
Unique Number : 10857286 **Diagnostician** : Sean Felton
Test Package : CONST

AMERICAN STATE EQUIPMENT CO.
 2055 SOUTH 108TH STREET
 MILWAUKEE, WI
 US 53227
 Contact: RAY SCHMIDT
 RSCHMIDT@AMSTATE.COM
 T: (414)234-0854
 F: (414)541-1892

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)