



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**2126950**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0114797</b>	PCA0092437	---
Sample Date		Client Info		<b>22 Jan 2024</b>	22 Apr 2023	---
Machine Age	mls	Client Info		<b>61201</b>	21881	---
Oil Age	mls	Client Info		<b>20000</b>	21881	---
Filter Age	mls	Client Info		<b>20000</b>	21881	---
Oil Changed		Client Info		<b>Not Chngd</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

**WEAR**

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	<b>22</b>	42	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>4	<b>4</b>	1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>8</b>	23	---
Lead	ppm	ASTM D5185m	>40	<b>2</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>309</b>	229	---
Tin	ppm	ASTM D5185m	>15	<b>1</b>	4	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	▲ 35	---
Potassium	ppm	ASTM D5185m	>20	<b>21</b>	67	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.2</b>	8.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.3</b>	24.4	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	6	---
Boron	ppm	ASTM D5185m	2	<b>4</b>	311	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	50	<b>60</b>	118	---
Manganese	ppm	ASTM D5185m	0	<b>1</b>	4	---
Magnesium	ppm	ASTM D5185m	950	<b>913</b>	668	---
Calcium	ppm	ASTM D5185m	1050	<b>1057</b>	1512	---
Phosphorus	ppm	ASTM D5185m	995	<b>1080</b>	676	---
Zinc	ppm	ASTM D5185m	1180	<b>1275</b>	832	---
Sulfur	ppm	ASTM D5185m	2600	<b>2999</b>	2542	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.0</b>	21.7	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.4</b>	8.3	---
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.0</b>	9.6	---

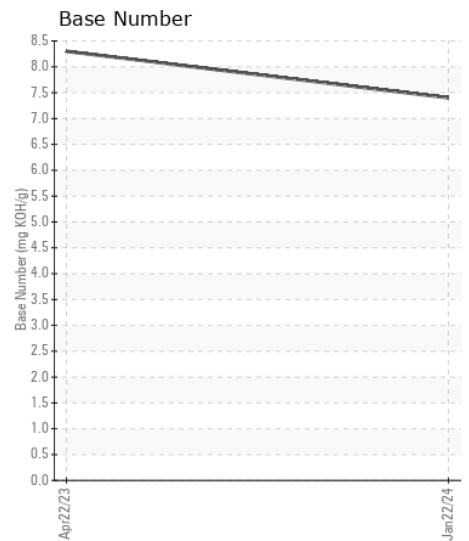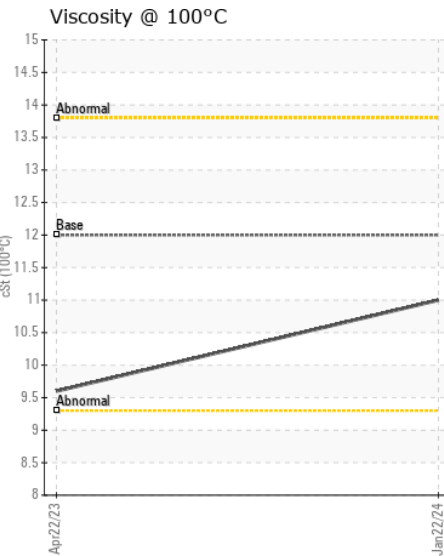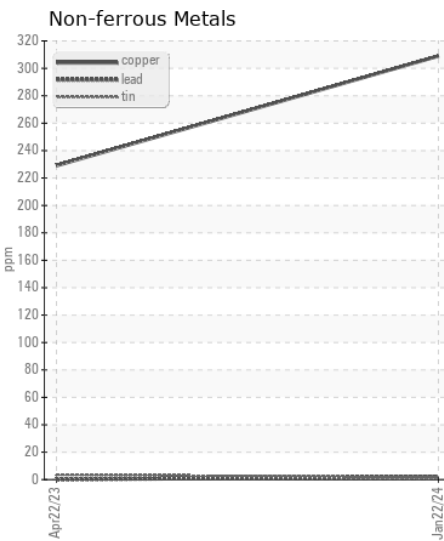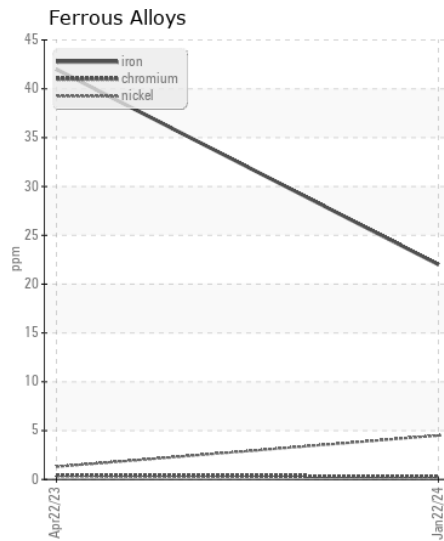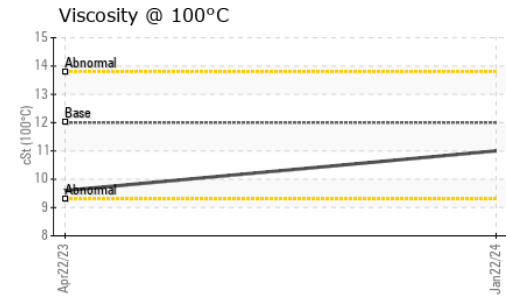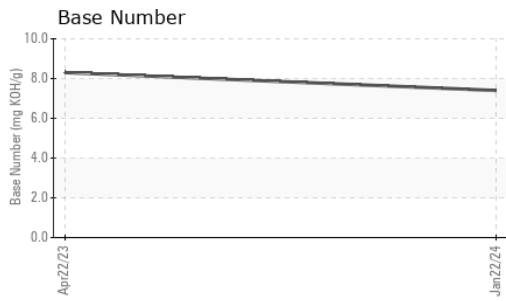

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0114797 **Received** : 31 Jan 2024  
**Lab Number** : 06075555 **Diagnosed** : 01 Feb 2024  
**Unique Number** : 10857646 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - SALISBURY**  
 7036 ZION CHURCH ROAD  
 SALISBURY, MD  
 US 21802  
 Contact: RICHARD O'NEAL  
 richard.oneal@perdue.com  
 T: (410)543-3628  
 F: (410)341-2164

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)