



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[05W44670]
 Machine Id
JOHN DEERE 310E 1DW310EXCNF716248
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (32 QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0203329	JR0182035	JR0166664
Sample Date		Client Info		30 Jan 2024	14 Aug 2023	24 Mar 2023
Machine Age	hrs	Client Info		1440	956	459
Oil Age	hrs	Client Info		484	497	0
Filter Age	hrs	Client Info		484	497	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	ABNORMAL

WEAR

Valve wear is indicated.

Iron	ppm	ASTM D5185m	>51	17	17	21
Chromium	ppm	ASTM D5185m	>11	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	▲ 26	15	5
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>31	5	3	3
Lead	ppm	ASTM D5185m	>26	2	0	3
Copper	ppm	ASTM D5185m	>26	12	41	21
Tin	ppm	ASTM D5185m	>4	<1	0	2
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	6	5	10
Potassium	ppm	ASTM D5185m	>20	3	0	6
Fuel		WC Method	>2.1	<1.0	<1.0	0.2
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.2	7.9	7.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.8	21.5	21.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	2	0	4
Boron	ppm	ASTM D5185m		217	256	241
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		241	245	237
Manganese	ppm	ASTM D5185m		2	0	2
Magnesium	ppm	ASTM D5185m		785	808	821
Calcium	ppm	ASTM D5185m		1352	1408	1487
Phosphorus	ppm	ASTM D5185m		925	874	889
Zinc	ppm	ASTM D5185m		1096	1101	1115
Sulfur	ppm	ASTM D5185m		3058	3793	3318
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.0	15.9	16.0
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.4	8.2	9.0
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	12.9	▲ 10.0


▲ Ferrous Alloys

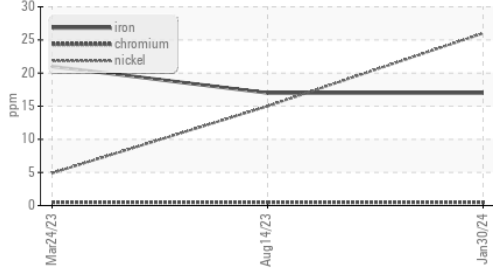


Base Number

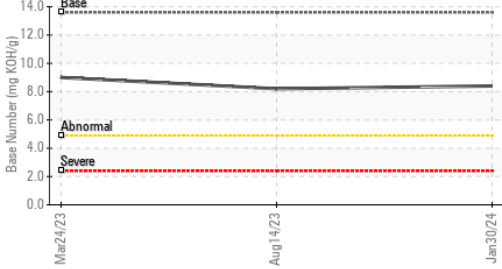


Viscosity @ 100°C

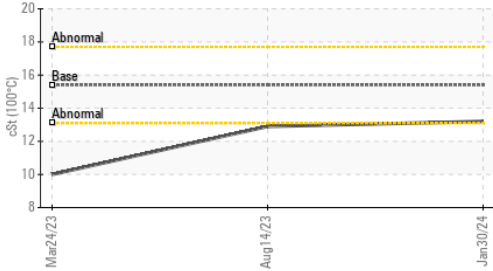


▲ Ferrous Alloys

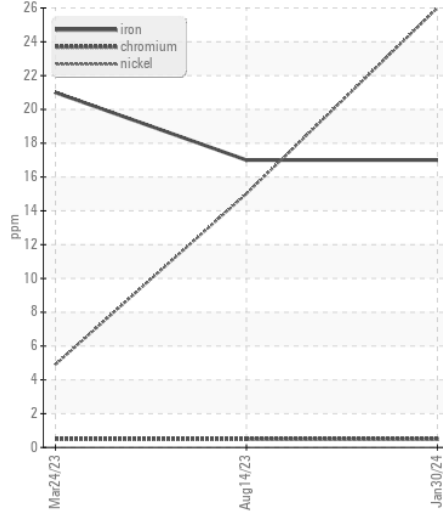


Non-ferrous Metals

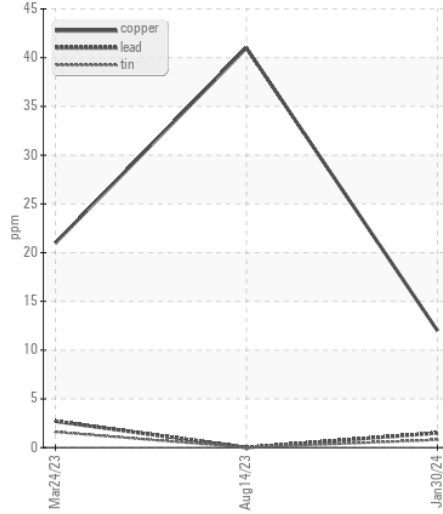

Viscosity @ 100°C

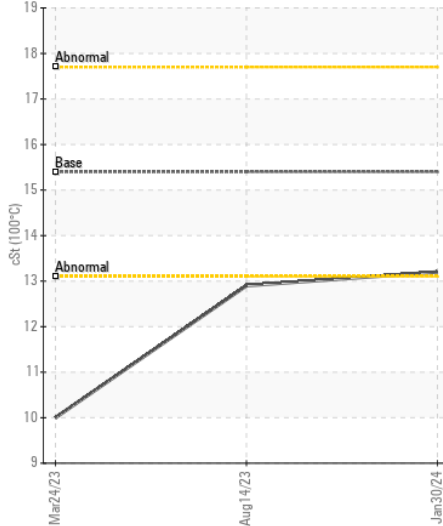

Base Number

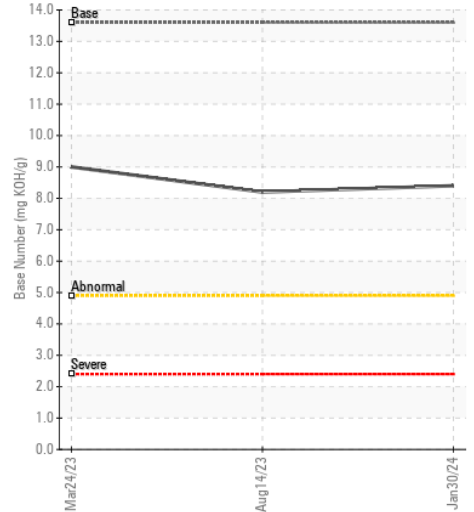

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0203329 **Received** : 31 Jan 2024
Lab Number : 06075606 **Diagnosed** : 02 Feb 2024
Unique Number : 10857697 **Diagnostician** : Jonathan Hester
Test Package : CONST (Additional Tests: TBN)

B & S SITE DEVELOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136
 Contact: DANNY HUFF
 dhuff@bandssite.com
 T: (540)270-3203
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)