



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
5049
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0195169	JR0169491	---
Sample Date		Client Info		29 Jan 2024	08 Aug 2023	---
Machine Age	hrs	Client Info		1385	617	---
Oil Age	hrs	Client Info		1000	617	---
Filter Age	hrs	Client Info		1000	617	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	14	17	---
Chromium	ppm	ASTM D5185m	>20	<1	1	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	3	6	---
Lead	ppm	ASTM D5185m	>40	1	<1	---
Copper	ppm	ASTM D5185m	>330	10	13	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	9	34	---
Potassium	ppm	ASTM D5185m	>20	6	16	---
Fuel		WC Method	>5	<1.0	0.2	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	8.7	9.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.1	20.2	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	2	2	---
Boron	ppm	ASTM D5185m	250	6	31	---
Barium	ppm	ASTM D5185m	10	0	2	---
Molybdenum	ppm	ASTM D5185m	100	8	39	---
Manganese	ppm	ASTM D5185m		1	2	---
Magnesium	ppm	ASTM D5185m	450	112	480	---
Calcium	ppm	ASTM D5185m	3000	2344	1652	---
Phosphorus	ppm	ASTM D5185m	1150	1022	779	---
Zinc	ppm	ASTM D5185m	1350	1186	946	---
Sulfur	ppm	ASTM D5185m	4250	3801	2739	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	21.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.4	7.9	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.3	▲ 11.5	---

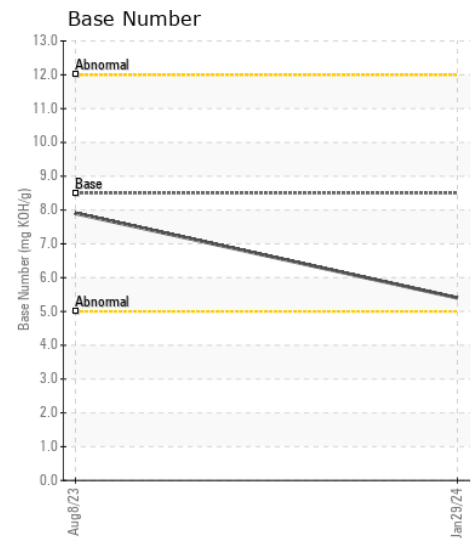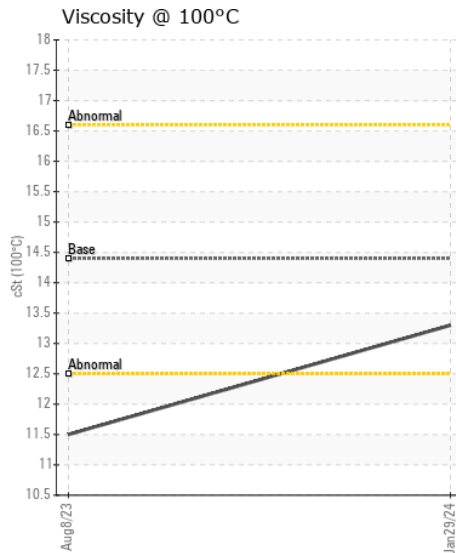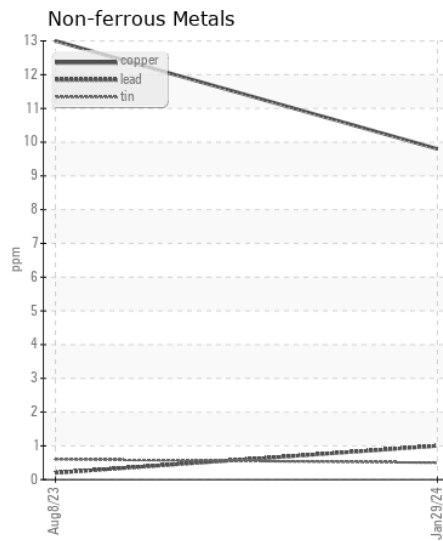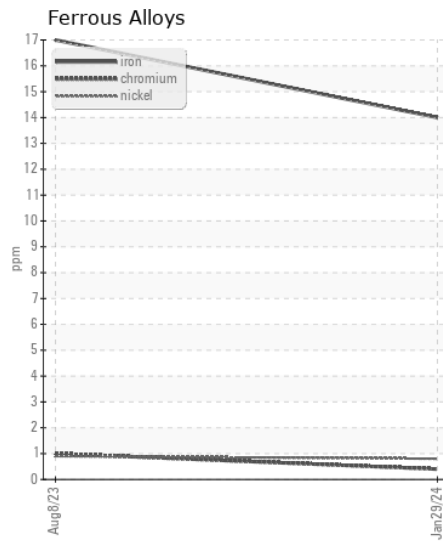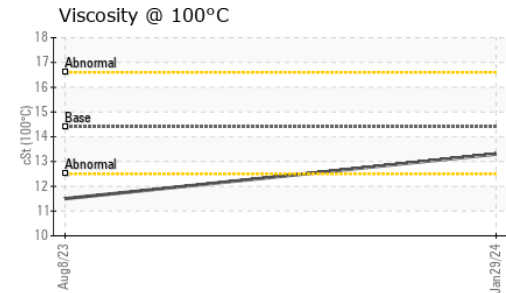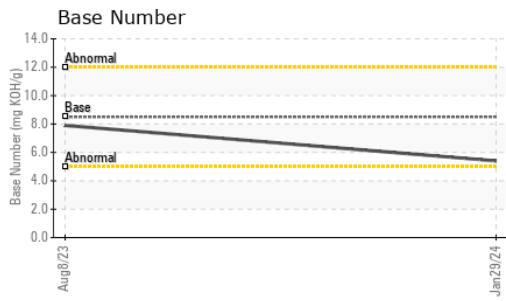

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0195169 **Received** : 31 Jan 2024
Lab Number : 06075616 **Diagnosed** : 01 Feb 2024
Unique Number : 10857707 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

PATRIOT DEVELOPMENT CORP
 22721 LADBROOK DRIVE STE 120
 STERLING, VA
 US 20166
 Contact: ROBERT MOSS
 robert.moss@patriotdev.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: