



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W8448]
 Machine Id
JOHN DEERE 35G 1FF035GXEMK292446
 Component
Hydraulic System
 Fluid
HITACHI HYDRAULIC SUPER EX 46HN (11 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: W8448)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0196890	JR0098211	---
Sample Date		Client Info		30 Jan 2024	22 Aug 2022	---
Machine Age	hrs	Client Info		991	991	---
Oil Age	hrs	Client Info		991	991	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	15	14	---
Iron	ppm	ASTM D5185m	>32	6	4	---
Chromium	ppm	ASTM D5185m	>9	0	0	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>9	<1	2	---
Lead	ppm	ASTM D5185m	>28	0	<1	---
Copper	ppm	ASTM D5185m	>50	1	2	---
Tin	ppm	ASTM D5185m	>5	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	LIGHT	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>11	2	<1	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Water		WC Method	>0.075	NEG	NEG	---
Particles >4µm		ASTM D7647	>80000	5368	2631	---
Particles >6µm		ASTM D7647	>20000	586	158	---
Particles >14µm		ASTM D7647	>640	9	14	---
Particles >21µm		ASTM D7647	>160	2	4	---
Particles >38µm		ASTM D7647	>40	1	1	---
Particles >71µm		ASTM D7647	>10	0	0	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	20/16/10	19/14/11	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	1	<1	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		3	5	---
Calcium	ppm	ASTM D5185m		<1	2	---
Phosphorus	ppm	ASTM D5185m	827	334	386	---
Zinc	ppm	ASTM D5185m	0	46	48	---
Sulfur	ppm	ASTM D5185m	13	903	905	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.12	0.16	---
Visc @ 40°C	cSt	ASTM D445	47	45.8	46.2	---

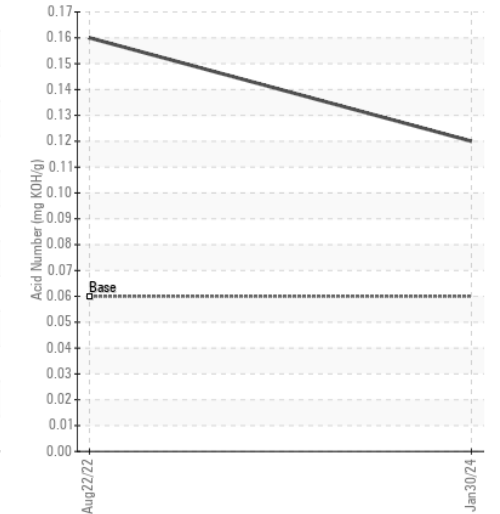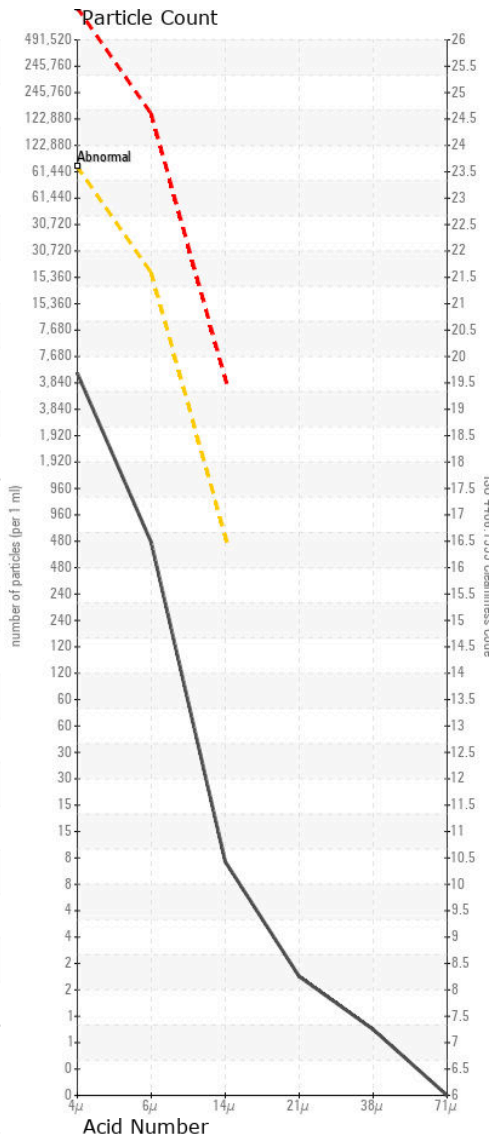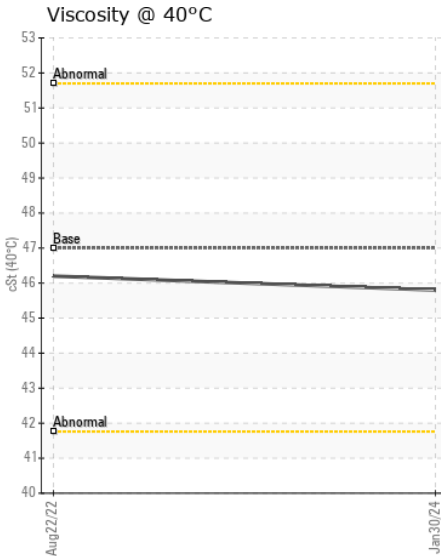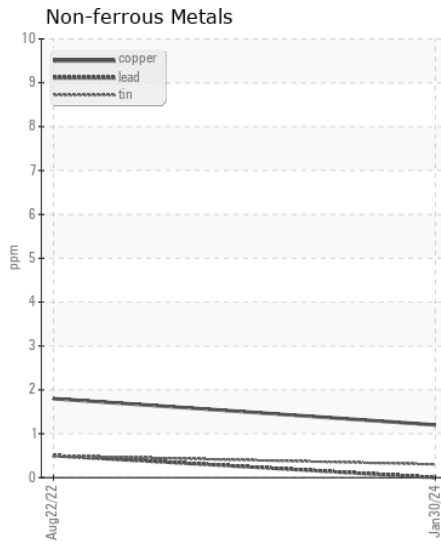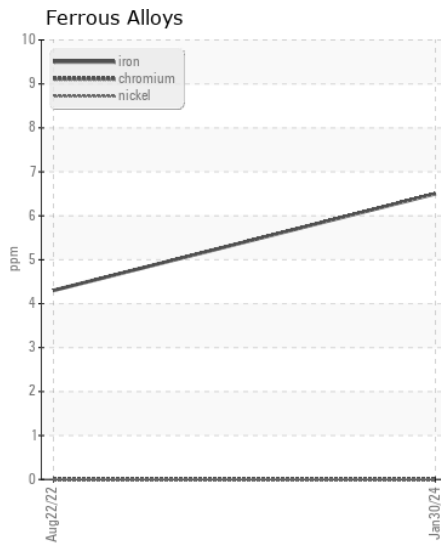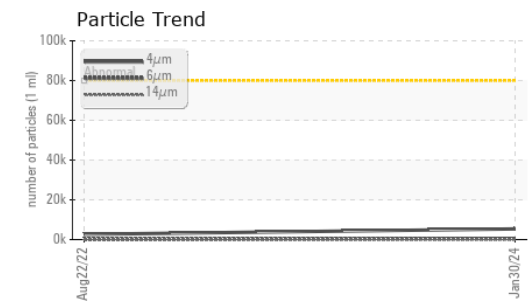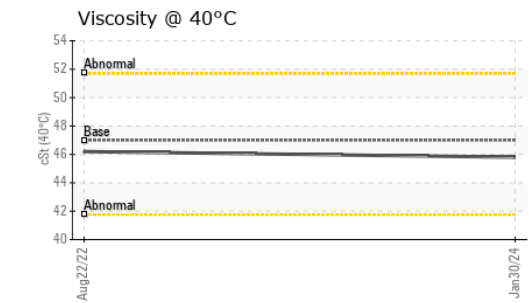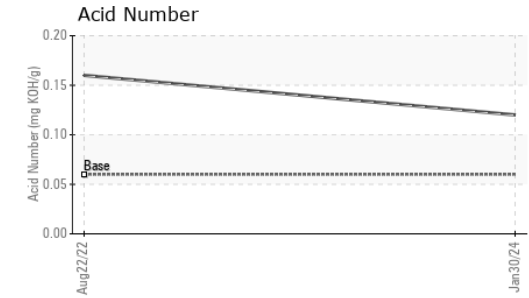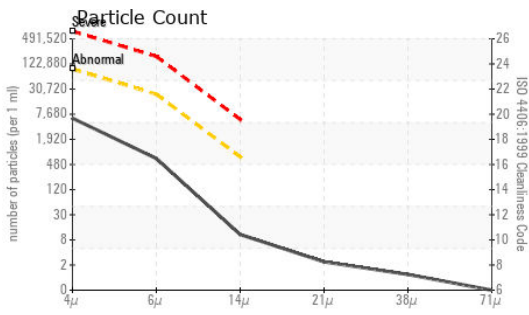

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0196890 **Received** : 31 Jan 2024
Lab Number : 06075621 **Diagnosed** : 01 Feb 2024
Unique Number : 10857712 **Diagnostician** : Angela Borella
Test Package : MOBCE (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529

Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

T: (919)614-2260
 F: (919)779-5432