



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[GREENRIDGE CONTR]**  
 Machine Id  
**JOHN DEERE 700K 1T0700KXKJF331084**  
 Component  
**Hydraulic System**  
 Fluid  
**JOHN DEERE HYDRAU (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0195172</b>	JR0169058	JR0147205
Sample Date		Client Info		<b>29 Jan 2024</b>	14 Apr 2023	28 Dec 2022
Machine Age	hrs	Client Info		<b>4983</b>	4453	4285
Oil Age	hrs	Client Info		<b>0</b>	4453	315
Filter Age	hrs	Client Info		<b>0</b>	4453	315
Oil Changed		Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Filter Changed		Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	<b>16</b>	9	6
Iron	ppm	ASTM D5185m	>23	<b>2</b>	<1	<1
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>2</b>	0	<1
Lead	ppm	ASTM D5185m	>28	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>51	<b>4</b>	2	2
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION














The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>31	<b>3</b>	1	0
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>80000	<b>3290</b>	1226	885
Particles >6µm		ASTM D7647	>20000	<b>472</b>	297	222
Particles >14µm		ASTM D7647	>640	<b>22</b>	19	28
Particles >21µm		ASTM D7647	>160	<b>5</b>	3	7
Particles >38µm		ASTM D7647	>40	<b>0</b>	1	0
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>23/21/16	<b>19/16/12</b>	17/15/11	17/15/12
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<b>&lt;1</b>	0	0
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>2</b>	13	2
Calcium	ppm	ASTM D5185m	87	<b>119</b>	88	90
Phosphorus	ppm	ASTM D5185m	727	<b>631</b>	614	619
Zinc	ppm	ASTM D5185m	900	<b>791</b>	829	824
Sulfur	ppm	ASTM D5185m	1500	<b>1561</b>	1621	1847
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.77</b>	0.71	0.721
Visc @ 40°C	cSt	ASTM D445	65	<b>59.1</b>	61.5	61.9

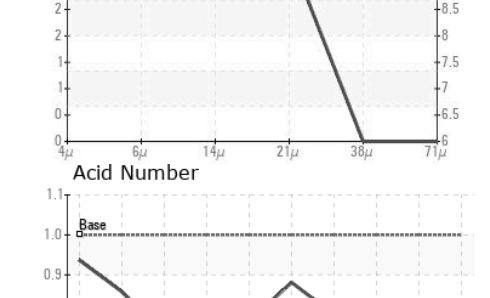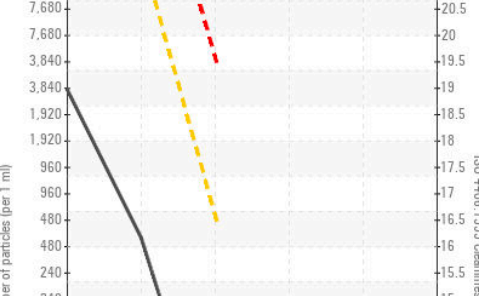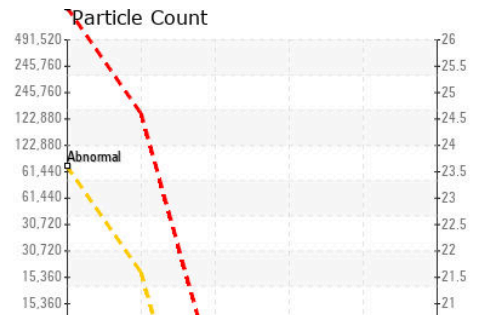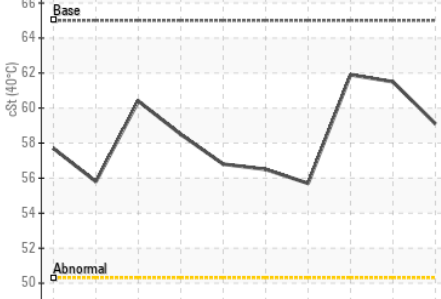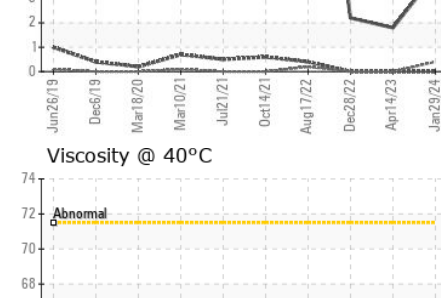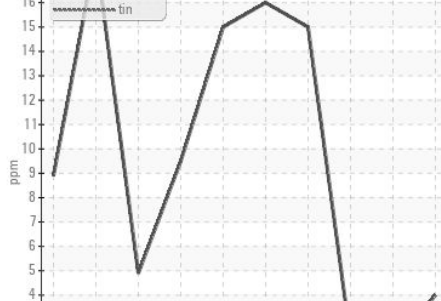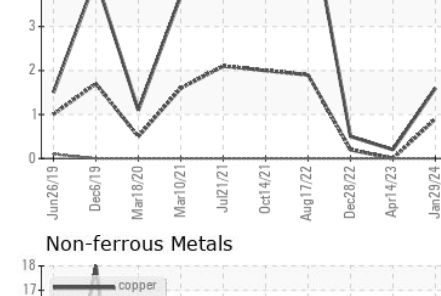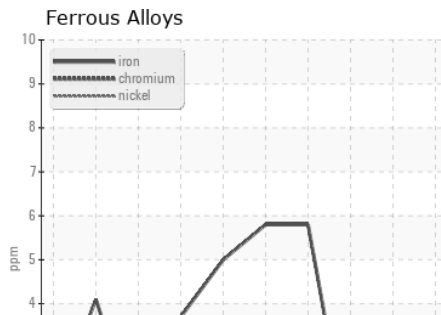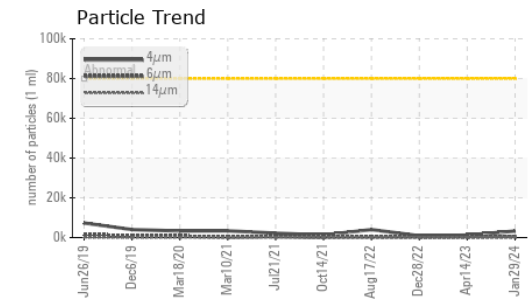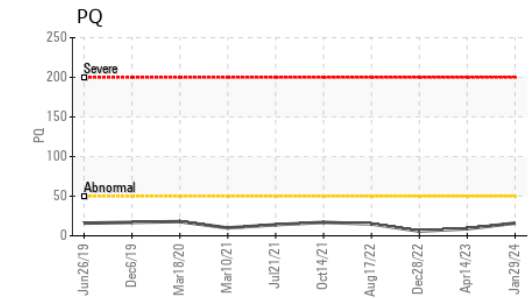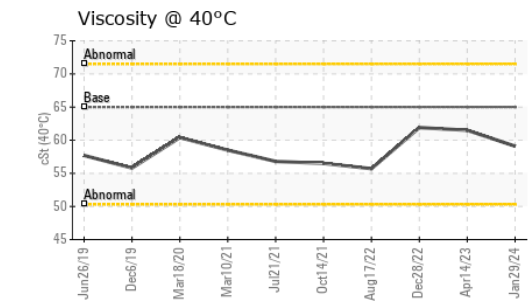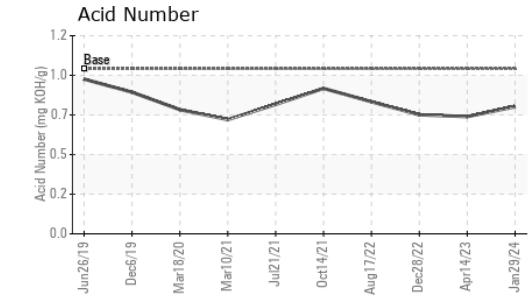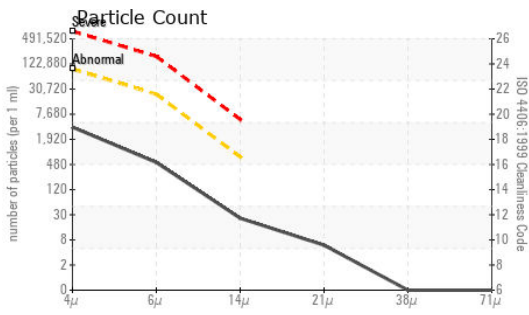

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0195172 **Received** : 31 Jan 2024  
**Lab Number** : 06075631 **Diagnosed** : 01 Feb 2024  
**Unique Number** : 10857722 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - STEPHENSON**  
 245 YARDMASTER COURT  
 STEPHENSON, VA  
 US 22656-1761  
 Contact: PHIL DAUGHERTY  
 pdaugherty@jamesriverequipment.com  
 T: x:  
 F: (540)693-2588