



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO L120H 632841**  
Component  
**Hydraulic System**  
Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

### WEAR

All component wear rates are normal.










### CONTAMINATION

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP0008149</b>	VCP303959	---
Sample Date		Client Info		<b>25 Jan 2024</b>	19 Mar 2021	---
Machine Age	hrs	Client Info		<b>8601</b>	1036	---
Oil Age	hrs	Client Info		<b>8601</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	Not Changd	---
Sample Status				<b>ABNORMAL</b>	NORMAL	---
Iron	ppm	ASTM D5185m	>50	<b>2</b>	2	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Copper	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	---
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silicon	ppm	ASTM D5185m	>20	<b>8</b>	10	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>5000	<b>▲ 28055</b>	4220	---
Particles >6µm		ASTM D7647	>1300	<b>▲ 3007</b>	249	---
Particles >14µm		ASTM D7647	>160	<b>80</b>	39	---
Particles >21µm		ASTM D7647	>40	<b>18</b>	13	---
Particles >38µm		ASTM D7647	>10	<b>1</b>	0	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>▲ 22/19/13</b>	19/15/12	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Sodium	ppm	ASTM D5185m		<b>1</b>	3	---
Boron	ppm	ASTM D5185m		<b>57</b>	26	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>18</b>	9	---
Calcium	ppm	ASTM D5185m		<b>1995</b>	737	---
Phosphorus	ppm	ASTM D5185m		<b>793</b>	504	---
Zinc	ppm	ASTM D5185m		<b>980</b>	652	---
Sulfur	ppm	ASTM D5185m		<b>2282</b>	1870	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.98</b>	0.417	---
Visc @ 40°C	cSt	ASTM D445		<b>48.9</b>	44.0	---

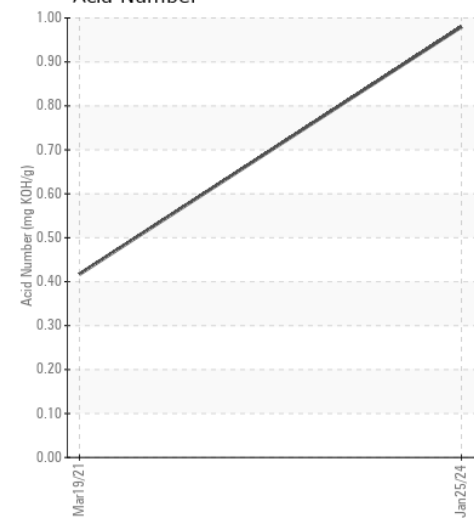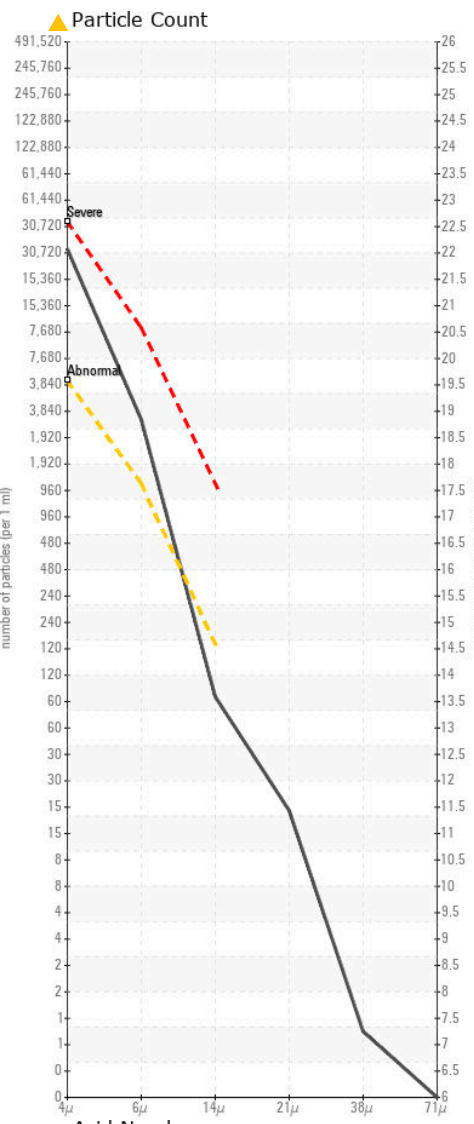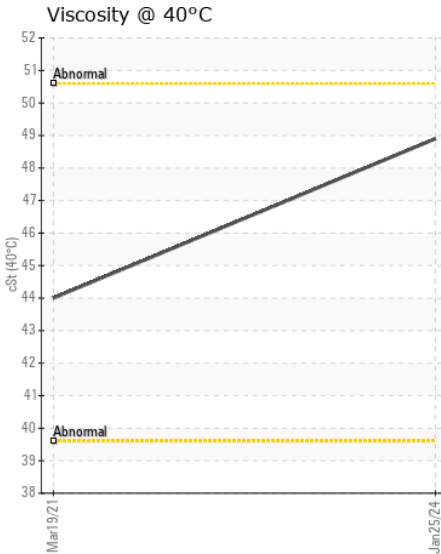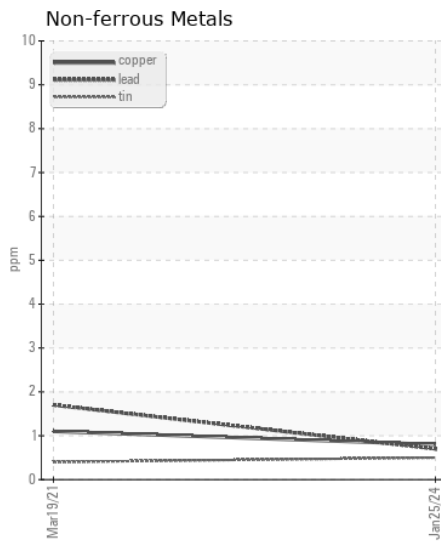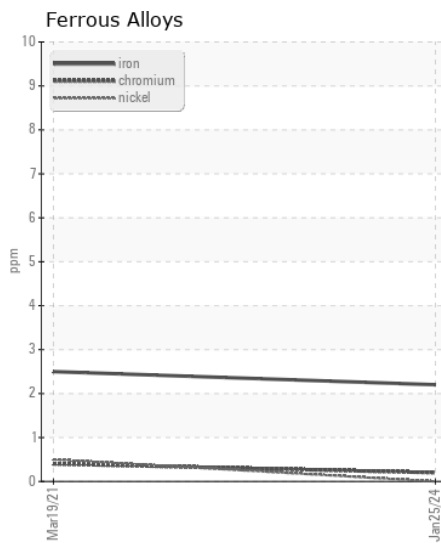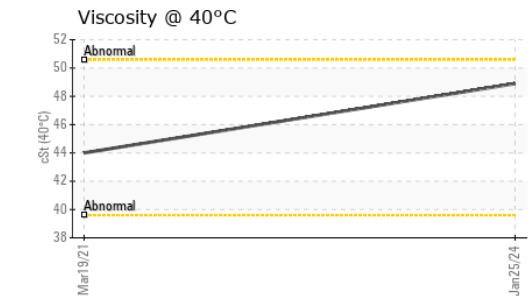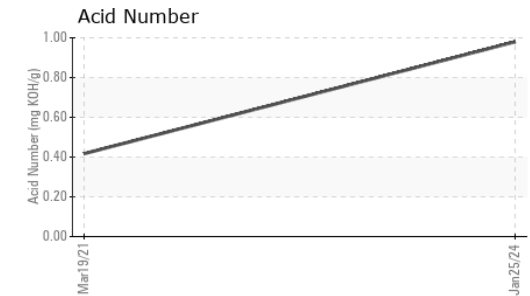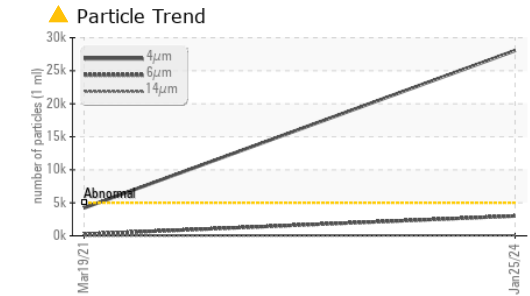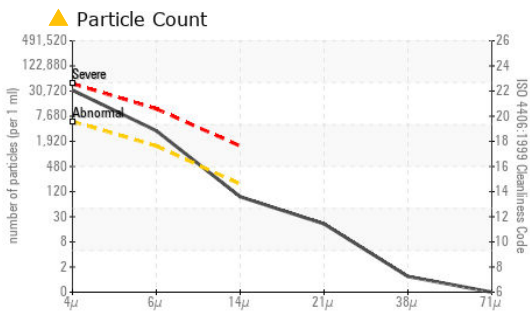

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP0008149 **Received** : 31 Jan 2024  
**Lab Number** : 06075653 **Diagnosed** : 01 Feb 2024  
**Unique Number** : 10857744 **Diagnostician** : Wes Davis  
**Test Package** : MOBCE

**ALTA EQUIPMENT COMPANY**  
 8750 PHILIPS HWY  
 JACKSONVILLE, FL  
 US 32256  
 Contact: SHAWN NORTHCRAFT  
 shawn.northcraft@altg.com  
 T: (904)737-6000  
 F: (904)737-1260

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)