



# VOLVO

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area  
**[BAKER]**  
Machine Id  
**VOLVO A40G 752213**  
Component  
**Hydraulic System**  
Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP422569	---	---
Sample Date		Client Info		30 Jan 2024	---	---
Machine Age	hrs	Client Info		47038	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	0	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	0	---	---
Lead	ppm	ASTM D5185m	>20	0	---	---
Copper	ppm	ASTM D5185m	>150	<1	---	---
Tin	ppm	ASTM D5185m	>20	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	<1	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647		4566	---	---
Particles >6µm		ASTM D7647	>5000	1827	---	---
Particles >14µm		ASTM D7647	>160	39	---	---
Particles >21µm		ASTM D7647	>40	6	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>-/19/14	19/18/12	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	5	0	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	5	0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	25	0	---	---
Calcium	ppm	ASTM D5185m	200	42	---	---
Phosphorus	ppm	ASTM D5185m	300	315	---	---
Zinc	ppm	ASTM D5185m	370	384	---	---
Sulfur	ppm	ASTM D5185m	2500	1492	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.52	---	---
Visc @ 40°C	cSt	ASTM D445	46	46.7	---	---

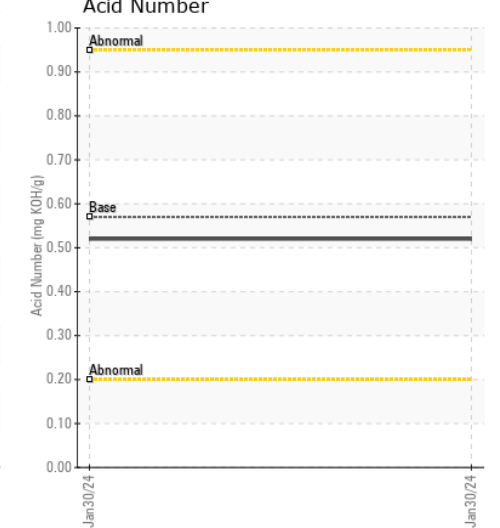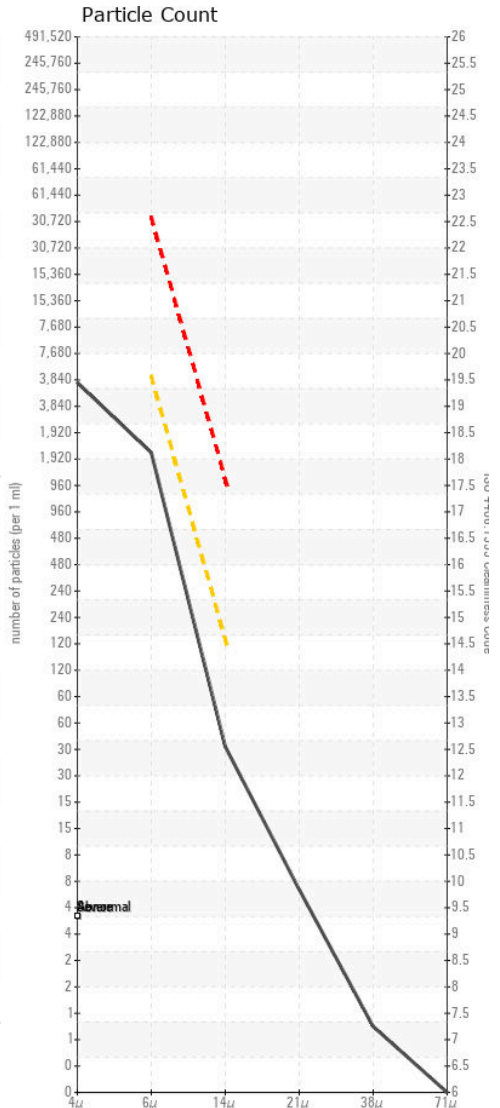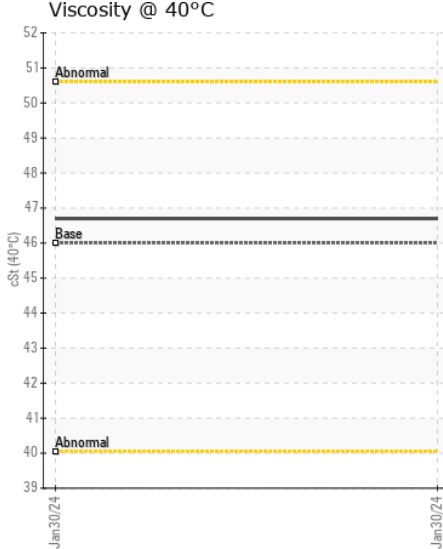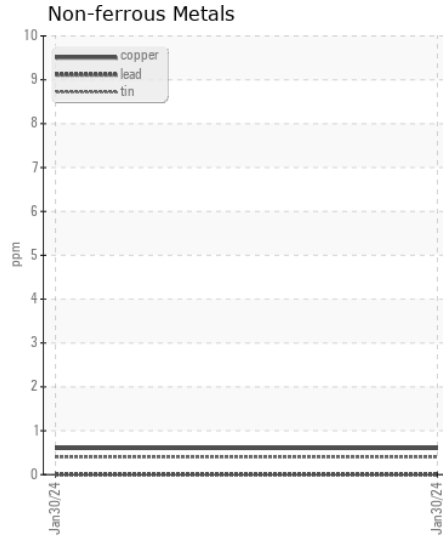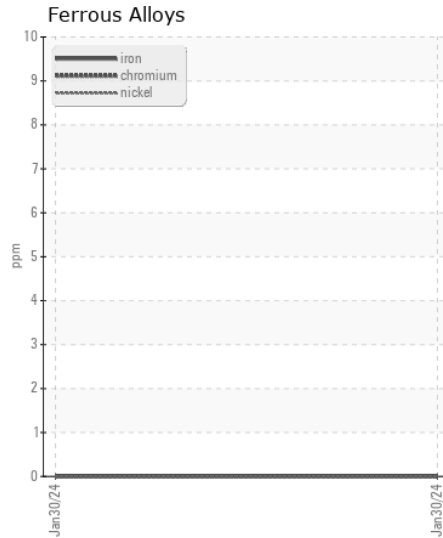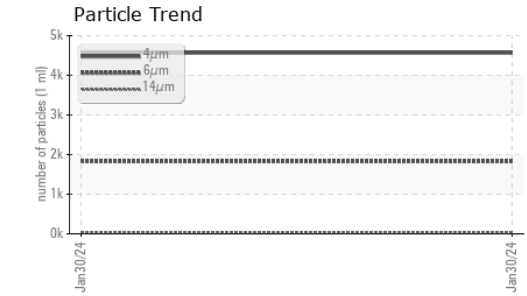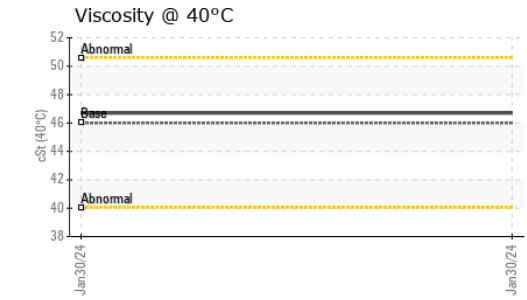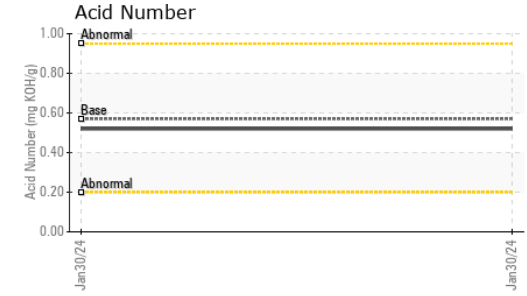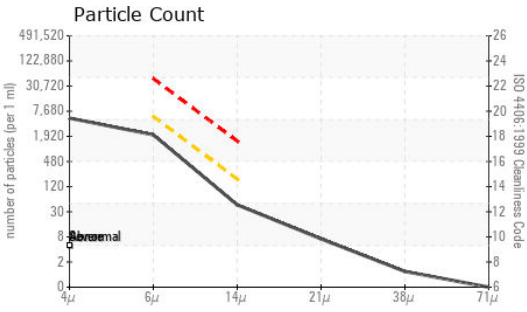

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP422569 **Received** : 31 Jan 2024  
**Lab Number** : 06075668 **Diagnosed** : 01 Feb 2024  
**Unique Number** : 10857759 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**365 - ASCENDUM MACHINERY INC - SAVANNAH**  
 1627 DEAN FOREST RD  
 SAVANNAH, GA  
 US 31408  
 Contact: JESSE WILSON  
 jesse.wilson@ascendummachinery.com  
 T:  
 F: (912)964-9515

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)