



Built for a lifetime™

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
8148216 (S/N 1882)

Component
Compressor

Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KCPA007397	KCP53122	---
Sample Date		Client Info		25 Jan 2024	26 Jan 2023	---
Machine Age	hrs	Client Info		3775	1778	---
Oil Age	hrs	Client Info		0	1778	---
Filter Age	hrs	Client Info		0	1778	---
Oil Changed		Client Info		N/A	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	0	<1	---
Chromium	ppm	ASTM D5185m	>10	0	0	---
Nickel	ppm	ASTM D5185m	>3	0	0	---
Titanium	ppm	ASTM D5185m	>3	<1	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>10	<1	<1	---
Lead	ppm	ASTM D5185m	>10	0	<1	---
Copper	ppm	ASTM D5185m	>50	4	4	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	LIGHT	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is a high amount of particulates present in the oil.

Silicon	ppm	ASTM D5185m	>25	<1	1	---
Potassium	ppm	ASTM D5185m	>20	1	2	---
Water	%	ASTM D6304	>0.05	0.024	0.016	---
ppm Water	ppm	ASTM D6304	>500	243	164.7	---
Particles >4µm		ASTM D7647		5829	142538	---
Particles >6µm		ASTM D7647	>1300	▲ 2234	▲ 67690	---
Particles >14µm		ASTM D7647	>80	▲ 242	▲ 2921	---
Particles >21µm		ASTM D7647	>20	▲ 64	▲ 238	---
Particles >38µm		ASTM D7647	>4	4	1	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>-/17/13	▲ 20/18/15	▲ 24/23/19	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		13	16	---
Boron	ppm	ASTM D5185m	0	0	0	---
Barium	ppm	ASTM D5185m	90	10	10	---
Molybdenum	ppm	ASTM D5185m	0	0	0	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m	100	64	35	---
Calcium	ppm	ASTM D5185m	0	0	<1	---
Phosphorus	ppm	ASTM D5185m	0	<1	5	---
Zinc	ppm	ASTM D5185m	0	7	16	---
Sulfur	ppm	ASTM D5185m	23500	16679	18886	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.38	0.38	---
Visc @ 40°C	cSt	ASTM D445	45	44.9	50.7	---

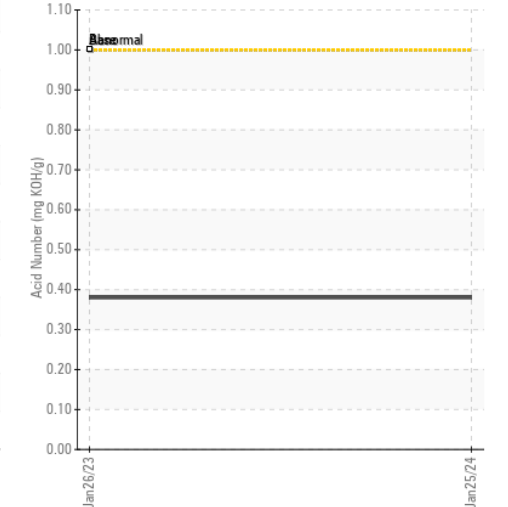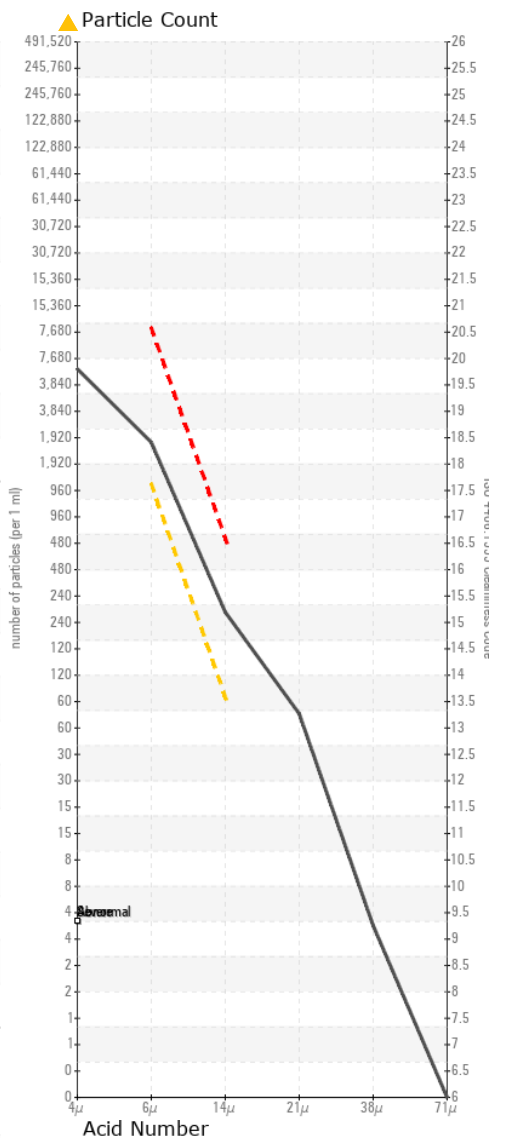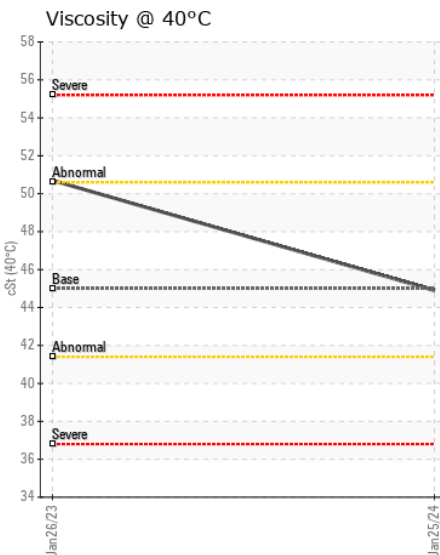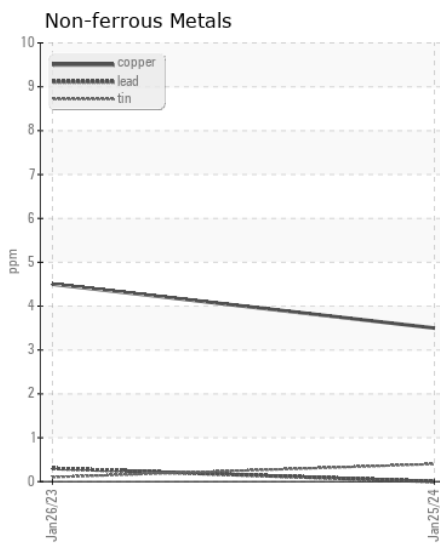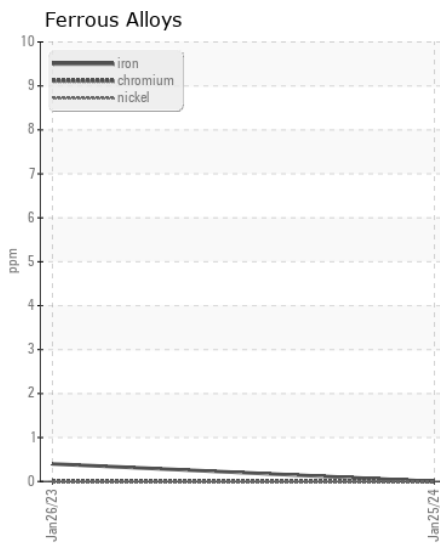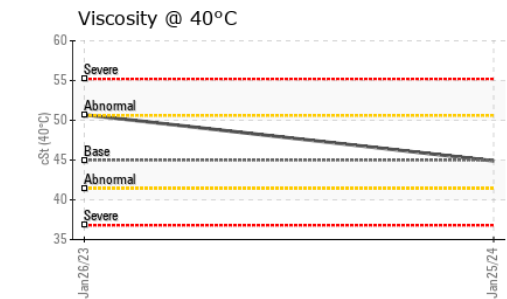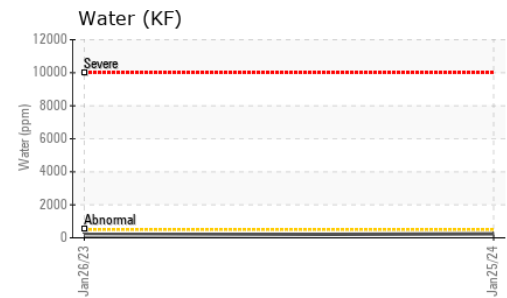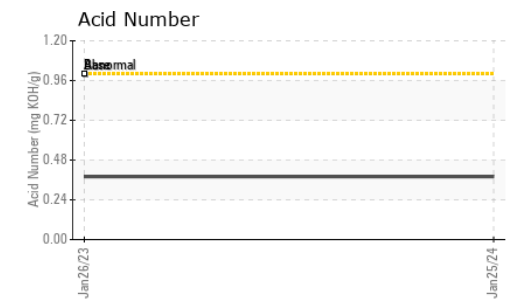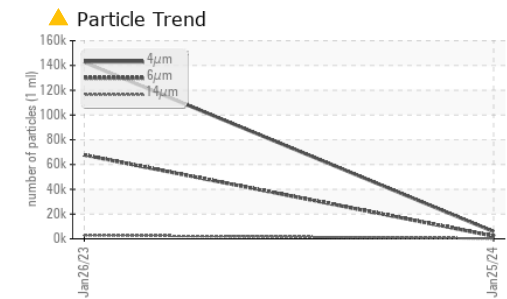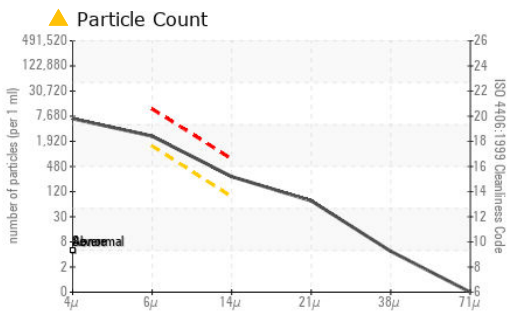

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA007397 **Received** : 31 Jan 2024
Lab Number : 06075785 **Tested** : 01 Feb 2024
Unique Number : 10857876 **Diagnosed** : 01 Feb 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

E & J CABINETS
 4105 GLOBEVILLE RD
 DENVER, CO
 US 80216
 Contact: JESSE
 jesse@ejcabinets.com

T:
F: