



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
GARRON L SNEED (S/N 560609)
Component
Port Reduction Gear
Fluid
MOBIL MOBILGEAR 600 XP 320 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0046147	MW0046171	MW0046109
Sample Date		Client Info		02 Jan 2024	27 Nov 2023	30 Oct 2023
Machine Age	hrs	Client Info		76247	75358	74852
Oil Age	hrs	Client Info		76247	32831	32220
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	Not Changd	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	56	59	57
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m	>10	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	7	7	8
Lead	ppm	ASTM D5185m	>100	1	<1	<1
Copper	ppm	ASTM D5185m	>50	10	10	10
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	2	1	2
Potassium	ppm	ASTM D5185m	>20	2	0	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	4	4
Boron	ppm	ASTM D5185m		9	8	7
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		6	6	6
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		4	0	2
Calcium	ppm	ASTM D5185m		13	2	9
Phosphorus	ppm	ASTM D5185m		292	252	291
Zinc	ppm	ASTM D5185m		13	5	3
Sulfur	ppm	ASTM D5185m		15135	14245	15168
Acid Number (AN)	mg KOH/g	ASTM D8045		1.06	0.96	1.07
Visc @ 40°C	cSt	ASTM D445	320	328	329	329

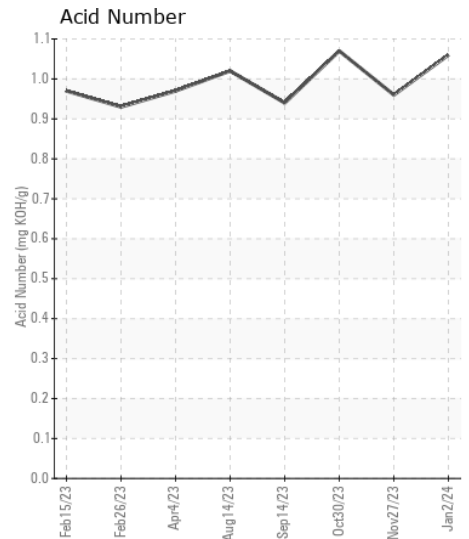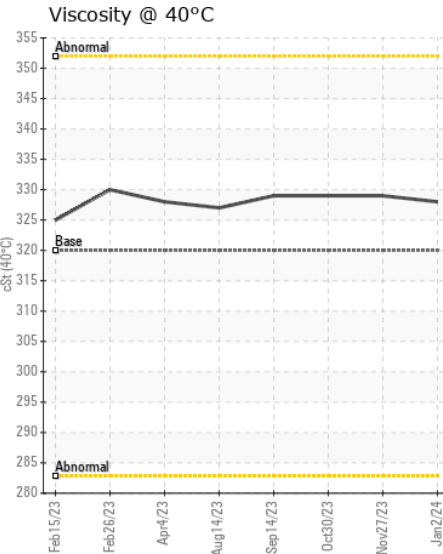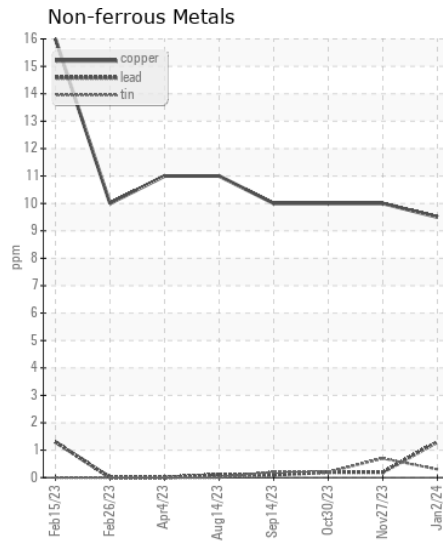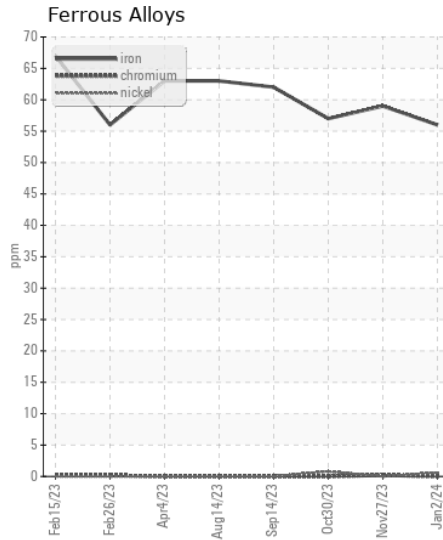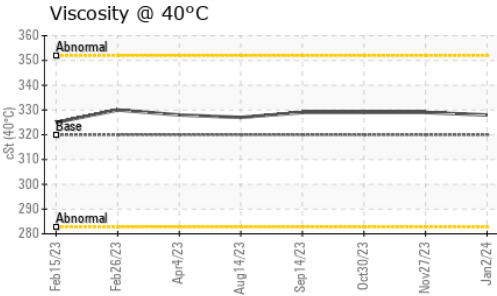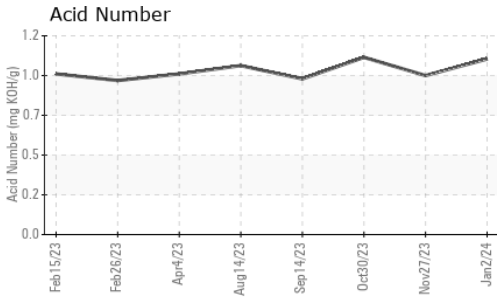

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0046147 **Received** : 31 Jan 2024
Lab Number : 06075999 **Diagnosed** : 01 Feb 2024
Unique Number : 10858090 **Diagnostician** : Wes Davis
Test Package : MAR 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

AMERICAN COMMERCIAL LINES
 PO BOX 610, 1701 E. MARKET STREET
 JEFFERSONVILLE, IN
 US 47130
 Contact: RONALD SCHNEIDER
 ronald.schneider@bargeacbl.com
 T:
 F: (812)288-1644