



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[W8448]**  
 Machine Id  
**JOHN DEERE 35G 1FF035GXEMK292446**  
 Component  
**Right Final Drive**  
 Fluid  
**JOHN DEERE GL-5 80W90 (1 PNT)**

### RECOMMENDATION

Resample at the next service interval to monitor. ( Customer Sample Comment: W8448 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0196883</b>	JR0098212	---
Sample Date		Client Info		<b>30 Jan 2024</b>	22 Aug 2022	---
Machine Age	hrs	Client Info		<b>991</b>	991	---
Oil Age	hrs	Client Info		<b>991</b>	991	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	ATTENTION	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>120</b>	58	---
Iron	ppm	ASTM D5185m	>750	<b>176</b>	176	---
Chromium	ppm	ASTM D5185m	>9	<b>2</b>	3	---
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>40	<b>2</b>	5	---
Lead	ppm	ASTM D5185m	>15	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>40	<b>2</b>	4	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>MODER</b>	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION











There is no indication of any contamination in the component.

Silicon	ppm	ASTM D5185m	>75	<b>12</b>	26	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	---
Water		WC Method	>0.075	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>0</b>	2	---
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	▲ 16	---
Barium	ppm	ASTM D5185m		<b>4</b>	▲ 24	---
Molybdenum	ppm	ASTM D5185m		<b>3</b>	17	---
Manganese	ppm	ASTM D5185m		<b>2</b>	3	---
Magnesium	ppm	ASTM D5185m		<b>5</b>	10	---
Calcium	ppm	ASTM D5185m		<b>599</b>	▲ 3810	---
Phosphorus	ppm	ASTM D5185m		<b>312</b>	566	---
Zinc	ppm	ASTM D5185m		<b>164</b>	▲ 742	---
Sulfur	ppm	ASTM D5185m		<b>16380</b>	▲ 2363	---
Visc @ 40°C	cSt	ASTM D445		<b>126</b>	▲ 92.9	---

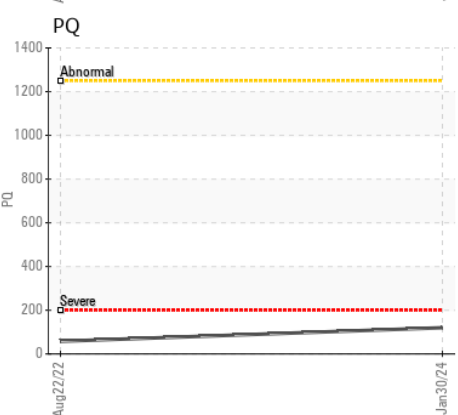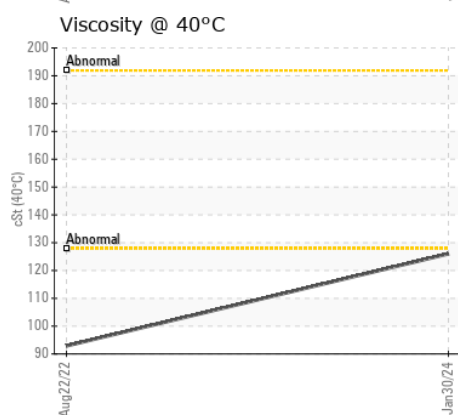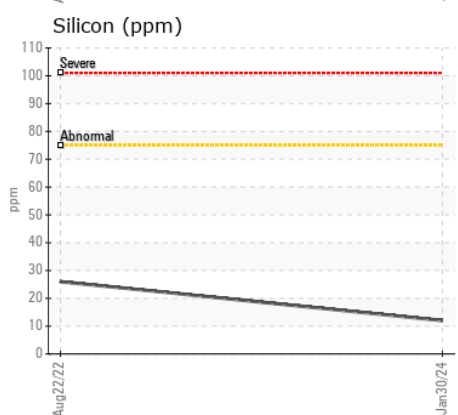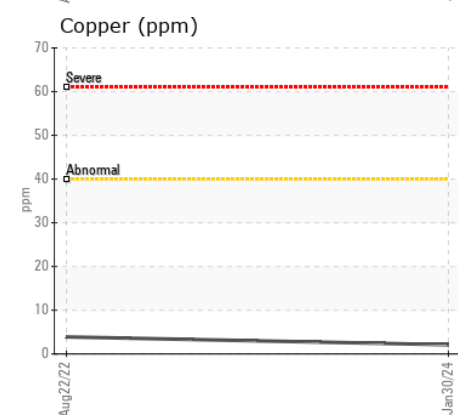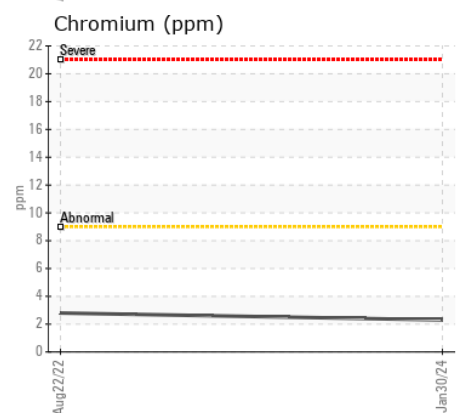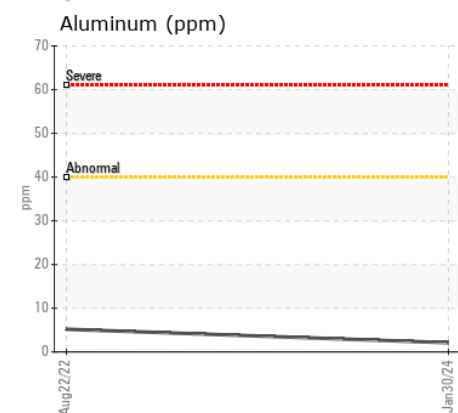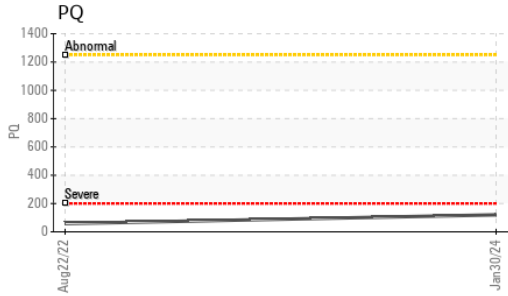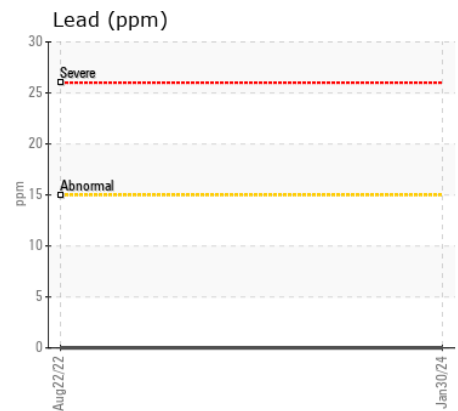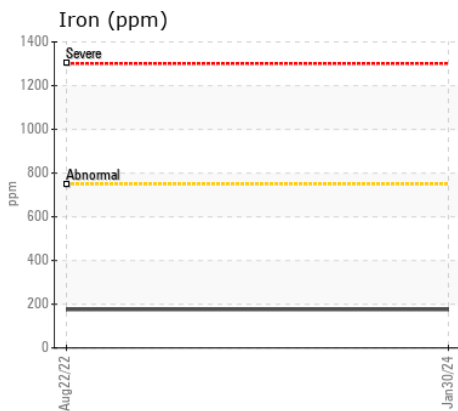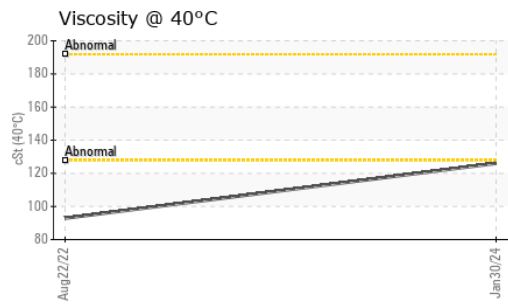

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0196883 **Received** : 31 Jan 2024  
**Lab Number** : 06076052 **Diagnosed** : 01 Feb 2024  
**Unique Number** : 10858143 **Diagnostician** : Sean Felton  
**Test Package** : MOBCE ( Additional Tests: PQ )

**JRE - GARNER**  
 4161 AUBURN CHURCH RD  
 GARNER, NC  
 US 27529  
 Contact: RALEIGH SHOP  
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com  
 T: (919)614-2260  
 F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)