



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[661680 ALTA RENTS]
Machine Id
VOLVO EC480E 315141
Component
Rear Right Final Drive
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP436811	VCP440722	VCP412215
Sample Date		Client Info		27 Jan 2024	23 Dec 2023	16 Aug 2023
Machine Age	hrs	Client Info		2449	2130	1133
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	216	439	344
Chromium	ppm	ASTM D5185m	>10	3	6	6
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>100	2	2	3
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	<1	0
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	MODER	MODER	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	8	13	11
Potassium	ppm	ASTM D5185m	>20	1	<1	2
Water		WC Method	>0.25	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.25	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	3	2
Boron	ppm	ASTM D5185m	111	103	0	0
Barium	ppm	ASTM D5185m	0.0	2	2	2
Molybdenum	ppm	ASTM D5185m	0.9	4	0	<1
Manganese	ppm	ASTM D5185m	0.0	2	6	5
Magnesium	ppm	ASTM D5185m	39	36	2	<1
Calcium	ppm	ASTM D5185m	93	115	20	12
Phosphorus	ppm	ASTM D5185m	920	737	290	339
Zinc	ppm	ASTM D5185m	104	86	7	<1
Sulfur	ppm	ASTM D5185m	20179	23534	15309	19519
Visc @ 40°C	cSt	ASTM D445	333	139	156	158

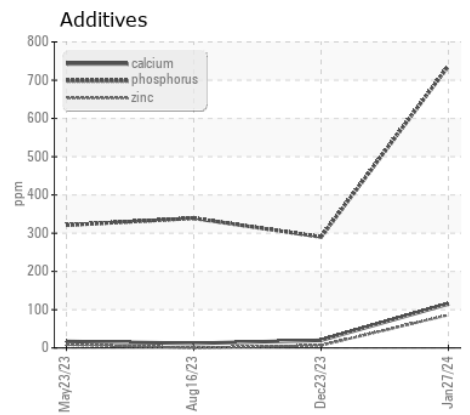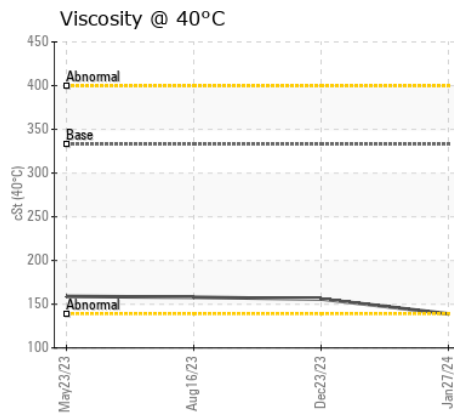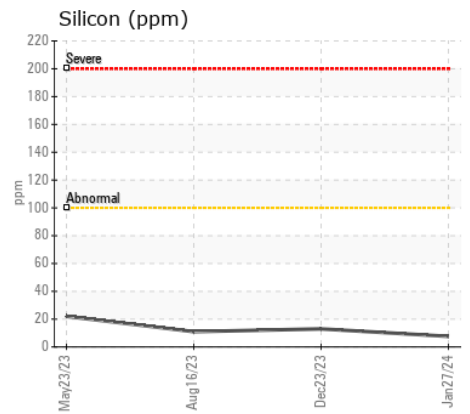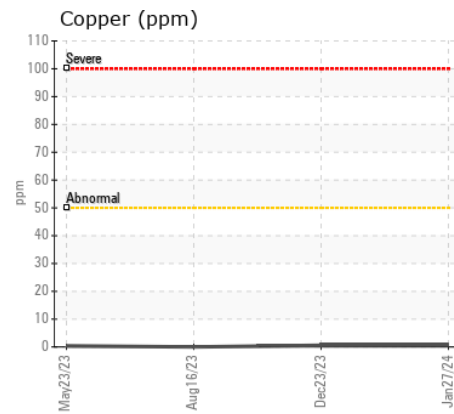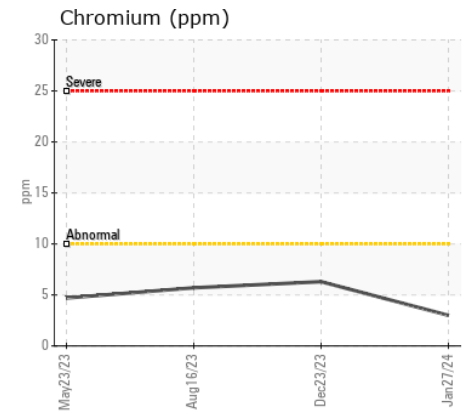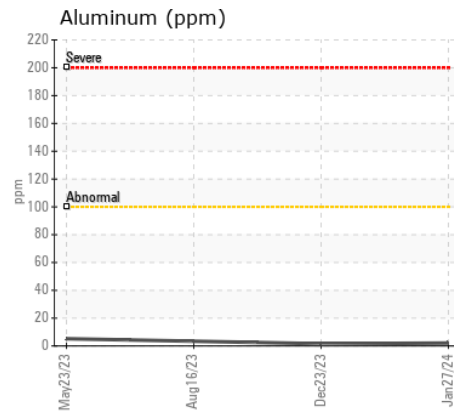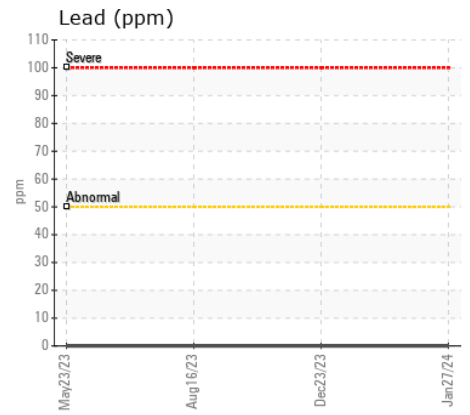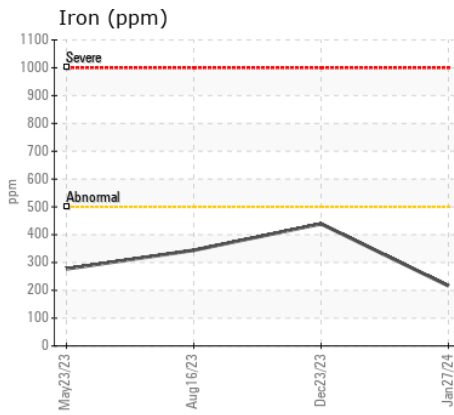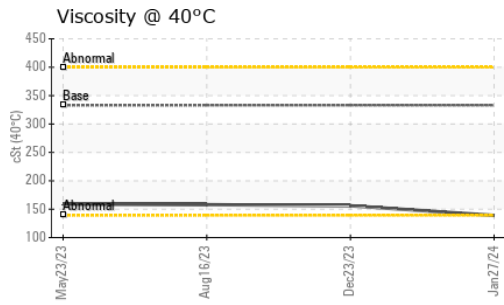

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP436811 **Received** : 31 Jan 2024
Lab Number : 06076111 **Diagnosed** : 01 Feb 2024
Unique Number : 10858202 **Diagnostician** : Sean Felton
Test Package : MOB 1

ALTA EQUIPMENT/FLAGLER EQUIPMENT LLC
 9601 BOGGY CREEK RD
 ORLANDO, FL
 US 32824
 Contact: Robert LaPlante
 robert.laplante@altg.com
 T: (407)508-9736
 F: (407)659-8720

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)