



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[SW0069079 GADSDEN]**  
Machine Id  
**VOLVO L450H 1015**  
Component  
**Rear Axle**  
Fluid  
**TRANSAXLE OIL SAE 75W80 (--- GAL)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP383719</b>	---	---
Sample Date		Client Info		<b>18 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>7</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

### WEAR

Moderate concentration of visible metal present. All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>57</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>120	<b>2</b>	---	---
Tin	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>▲ MODER</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>9</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	---	---
Boron	ppm	ASTM D5185m	160	<b>127</b>	---	---
Barium	ppm	ASTM D5185m	10	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m	25	<b>2</b>	---	---
Manganese	ppm	ASTM D5185m		<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m	12	<b>11</b>	---	---
Calcium	ppm	ASTM D5185m	3750	<b>3783</b>	---	---
Phosphorus	ppm	ASTM D5185m	1200	<b>1257</b>	---	---
Zinc	ppm	ASTM D5185m	1500	<b>1605</b>	---	---
Sulfur	ppm	ASTM D5185m	6000	<b>4284</b>	---	---
Visc @ 40°C	cSt	ASTM D445	48	<b>42.8</b>	---	---

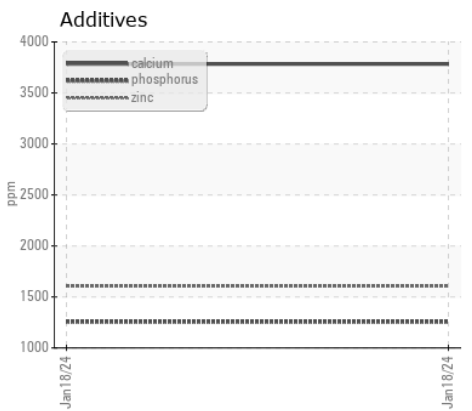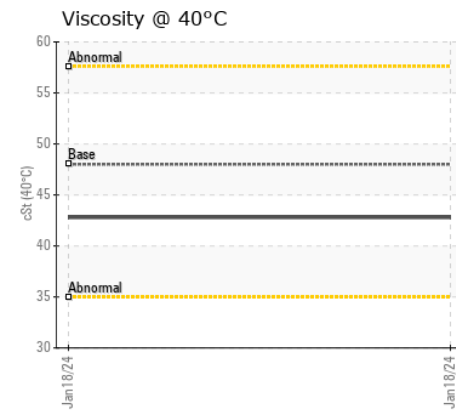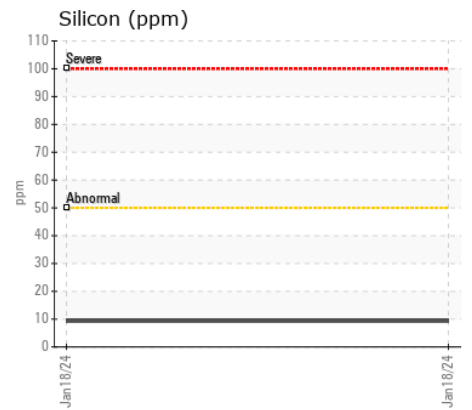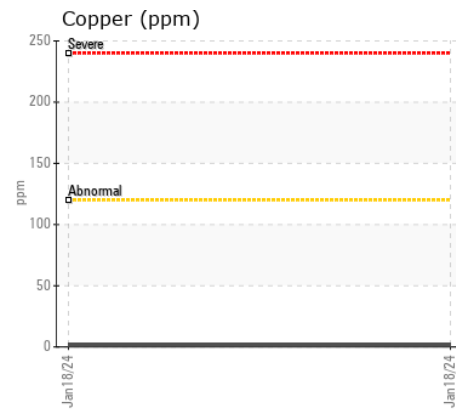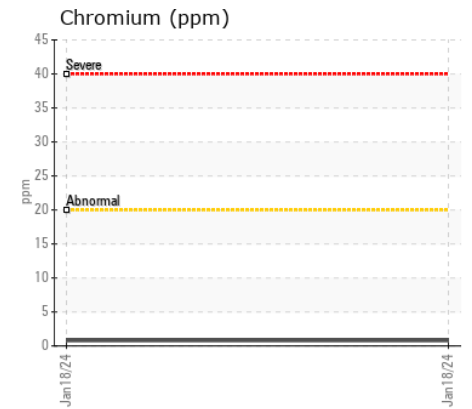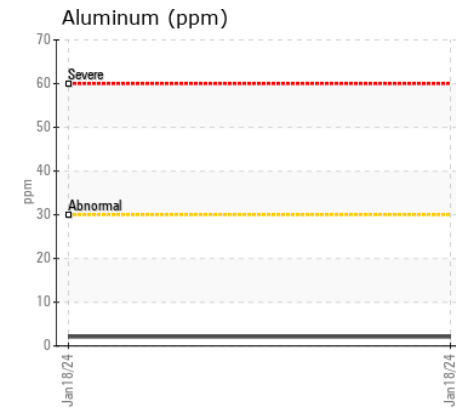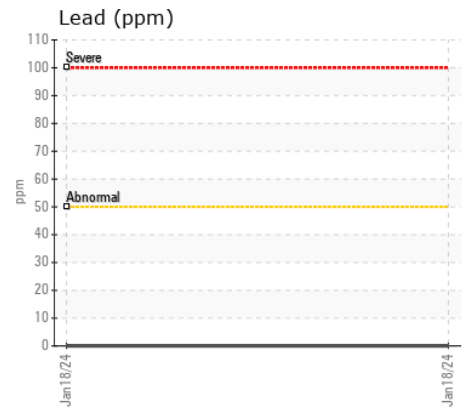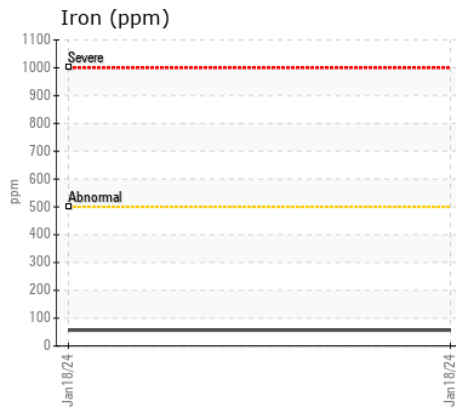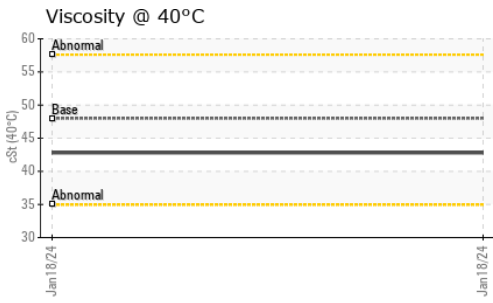

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP383719 **Recieved** : 31 Jan 2024  
**Lab Number** : 06076134 **Diagnosed** : 02 Feb 2024  
**Unique Number** : 10858225 **Diagnostician** : Sean Felton  
**Test Package** : MOB 1

**COWIN EQUIPMENT COMPANY**  
 2238 PINSON VALLEY PARKWAY  
 BIRMINGHAM, AL  
 US 35217  
 Contact: TIM JENKINS  
 tjenkins@cowin.com  
 T: (205)856-4008  
 F: (205)856-2106

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)