



ASCENDUM

OIL ANALYSIS REPORT

WEAR **NORMAL**

CONTAMINATION **ABNORMAL**

FLUID CONDITION **NORMAL**



Area
ASCENDUM 500 HR CSA
Machine Id
VOLVO A40G 2346 (S/N A40GV752044)
Component
Drop Box
Fluid
VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0007931	---	---
Sample Date		Client Info		29 Jan 2024	---	---
Machine Age	hrs	Client Info		494	---	---
Oil Age	hrs	Client Info		494	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		None	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	32	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	2	---	---
Lead	ppm	ASTM D5185m	>30	0	---	---
Copper	ppm	ASTM D5185m	>30	<1	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





Moderate concentration of visible dirt/debris present in the oil.

Silicon	ppm	ASTM D5185m	>50	3	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	▲ MODER	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		292	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		2	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m		160	---	---
Phosphorus	ppm	ASTM D5185m		2269	---	---
Zinc	ppm	ASTM D5185m		73	---	---
Sulfur	ppm	ASTM D5185m		30055	---	---
Visc @ 40°C	cSt	ASTM D445		52.6	---	---

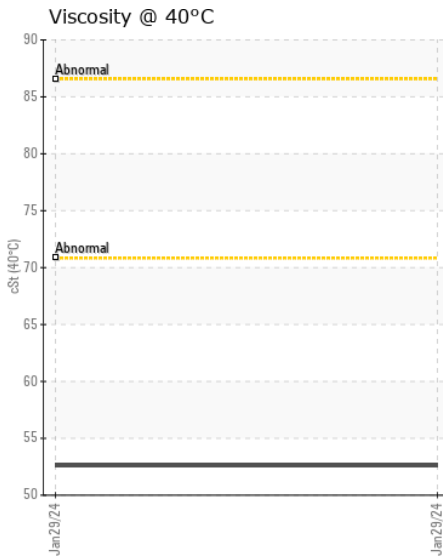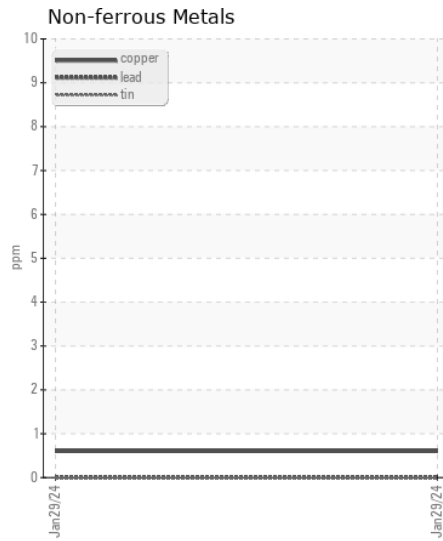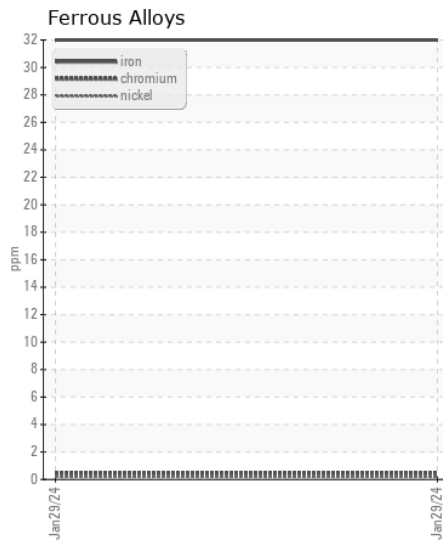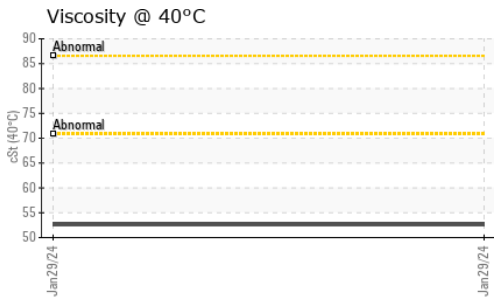

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0007931 **Received** : 31 Jan 2024
Lab Number : 06076161 **Diagnosed** : 02 Feb 2024
Unique Number : 10858252 **Diagnostician** : Sean Felton
Test Package : CONST

TRIANGLE GRADING AND PAVING INC
 1521 Huffman Mill Rd
 BURLINGTON, NC
 US 27216
 Contact: KAREN HILLIARD
 khilliard@trianglegradingpaving.com
 T: (336)584-1745
 F: (336)584-0145

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)