



OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
Z-3
Component
Hydraulic System
Fluid
SHELL TELLUS S2 MX 68 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|------------------|--------|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | WC0893797 | WC0868170 | WC0831561 |
| Sample Date | | Client Info | | 29 Jan 2024 | 16 Oct 2023 | 20 Jun 2023 |
| Machine Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |
| Iron | ppm | ASTM D5185m | >20 | 0 | 0 | 2 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >10 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >75 | 15 | 21 | 26 |
| Tin | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silicon | ppm | ASTM D5185m | >20 | <1 | 1 | 4 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 0 | <1 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |
| Sodium | ppm | ASTM D5185m | | 2 | 3 | 0 |
| Boron | ppm | ASTM D5185m | | 0 | <1 | 3 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | <1 | 0 | <1 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | 0 |
| Magnesium | ppm | ASTM D5185m | | 42 | 45 | 29 |
| Calcium | ppm | ASTM D5185m | | 36 | 40 | 51 |
| Phosphorus | ppm | ASTM D5185m | | 280 | 257 | 292 |
| Zinc | ppm | ASTM D5185m | | 309 | 283 | 341 |
| Sulfur | ppm | ASTM D5185m | | 819 | 771 | 1729 |
| Visc @ 40°C | cSt | ASTM D445 | 68.0 | 64.1 | 64.4 | 60.9 |

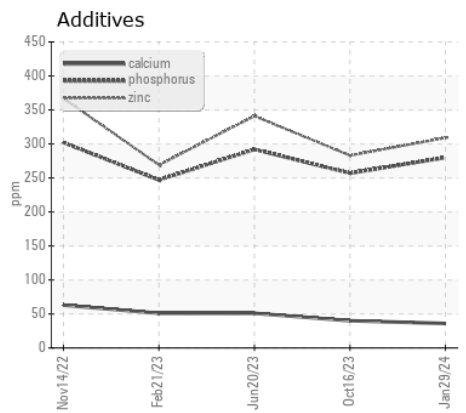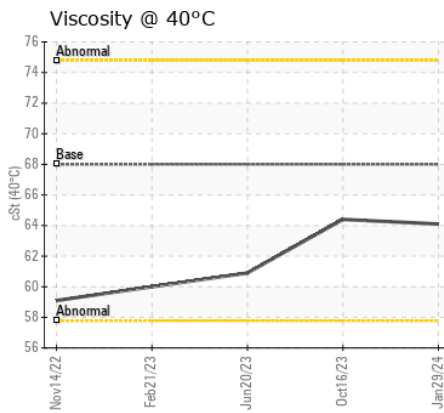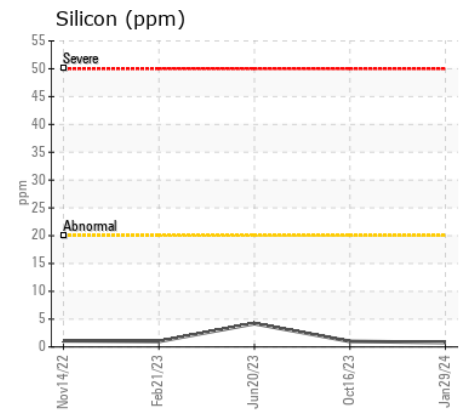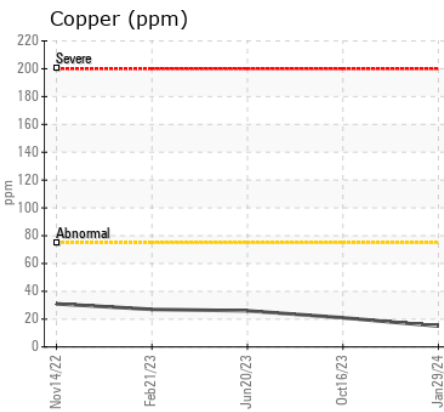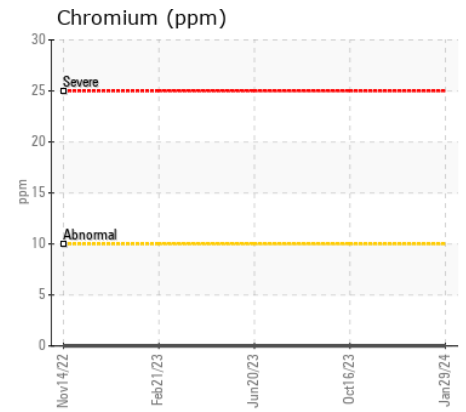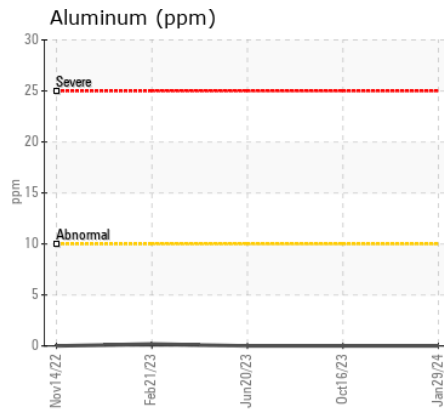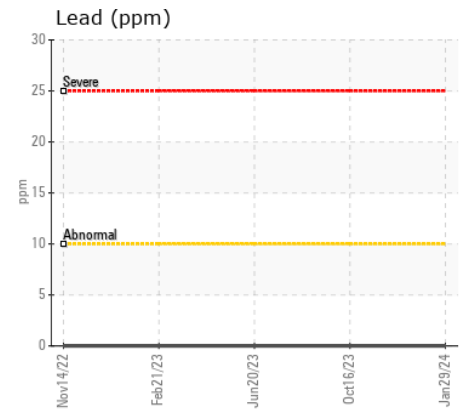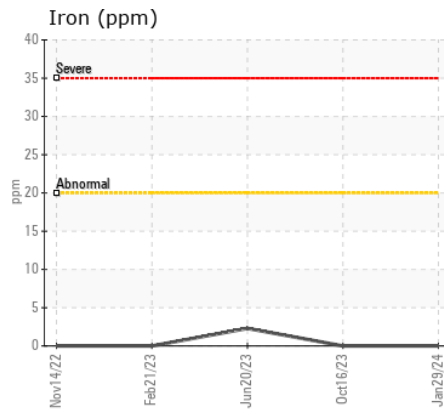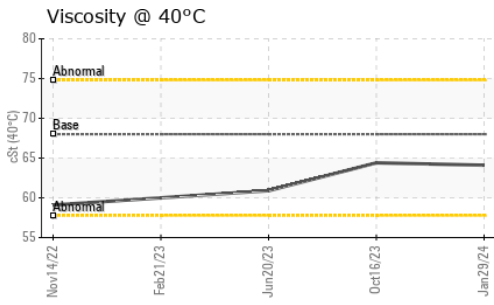

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0893797 **Received** : 31 Jan 2024
Lab Number : 06076225 **Diagnosed** : 01 Feb 2024
Unique Number : 10858316 **Diagnostician** : Wes Davis
Test Package : MOB 1

UNITED TOOL & STAMPING
 2817 ENTERPRISE AVE
 FAYETTEVILLE, NC
 US 28306
 Contact: KENNY BELL
 KENNY.BELL@UTS-NC.COM
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)