



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
714048
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | GFL0107686 | GFL0096602 | GFL0096537 |
| Sample Date | | Client Info | | 18 Jan 2024 | 12 Oct 2023 | 28 Sep 2023 |
| Machine Age | hrs | Client Info | | 1100 | 603 | 585 |
| Oil Age | hrs | Client Info | | 600 | 600 | 600 |
| Filter Age | hrs | Client Info | | 600 | 600 | 600 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

Metal levels are typical for a new component breaking in.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >90 | 23 | 39 | 37 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >2 | 0 | <1 | <1 |
| Titanium | ppm | ASTM D5185m | >2 | 0 | <1 | <1 |
| Silver | ppm | ASTM D5185m | >2 | 0 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 3 | 6 | 2 |
| Lead | ppm | ASTM D5185m | >40 | <1 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >330 | 2 | 16 | 15 |
| Tin | ppm | ASTM D5185m | >15 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >25 | 4 | 14 | 13 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 6 | 9 |
| Fuel | | WC Method | >3.0 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >6 | 0.4 | 0.4 | 0.5 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 9.0 | 10.4 | 11.0 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 19.5 | 20.9 | 21.5 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | | 5 | 6 | 5 |
| Boron | ppm | ASTM D5185m | 0 | 9 | 69 | 62 |
| Barium | ppm | ASTM D5185m | 0 | <1 | 6 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | 65 | 108 | 109 |
| Manganese | ppm | ASTM D5185m | 0 | 2 | 6 | 4 |
| Magnesium | ppm | ASTM D5185m | 1010 | 909 | 681 | 784 |
| Calcium | ppm | ASTM D5185m | 1070 | 1074 | 1296 | 1285 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 1016 | 740 | 784 |
| Zinc | ppm | ASTM D5185m | 1270 | 1220 | 906 | 954 |
| Sulfur | ppm | ASTM D5185m | 2060 | 2878 | 2982 | 2866 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 16.1 | 19.7 | 20.5 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 8.0 | 6.4 | 6.3 |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.8 | 13.5 | 13.9 |

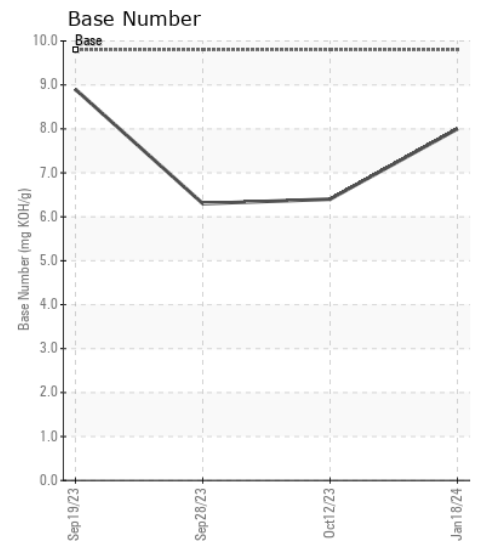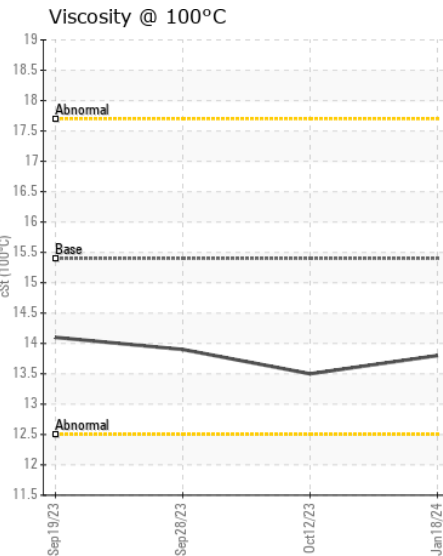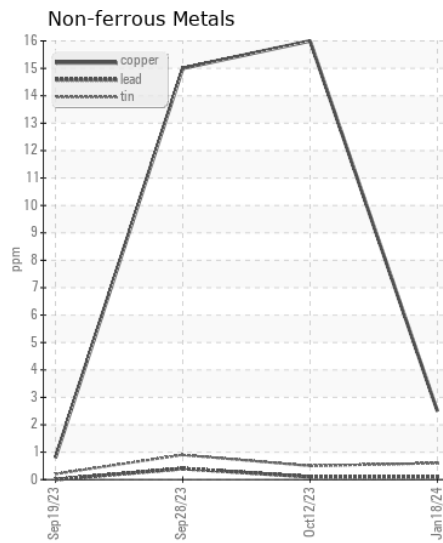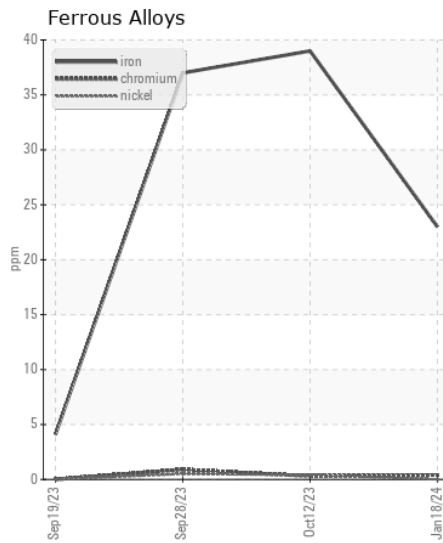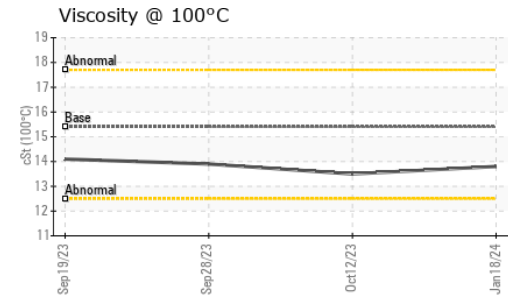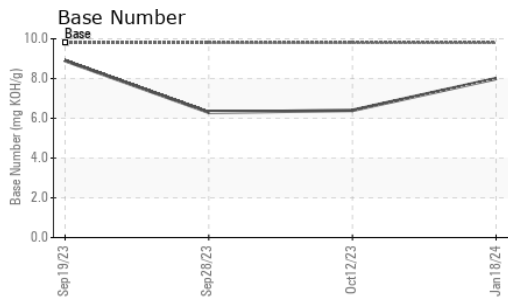

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0107686 **Received** : 01 Feb 2024
Lab Number : 06076594 **Diagnosed** : 01 Feb 2024
Unique Number : 10858685 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 465 - Pontiac
 888 Baldwin
 Pontiac, MI
 US 48340

Contact: Ricky Matthews
 rickymathews@gflenv.com

T: (586)825-9514

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)