



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
921074
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0111180	GFL0087945	---
Sample Date		Client Info		27 Jan 2024	20 Sep 2023	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		600	600	---
Filter Age	hrs	Client Info		600	600	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	5	9	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	<1	<1	---
Titanium	ppm	ASTM D5185m	>2	<1	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>20	2	2	---
Lead	ppm	ASTM D5185m	>40	0	<1	---
Copper	ppm	ASTM D5185m	>330	3	2	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	2	3	---
Potassium	ppm	ASTM D5185m	>20	3	2	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>4	0.6	0.7	---
Nitration	Abs/cm	*ASTM D7624	>20	8.1	8.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.6	20.7	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	4	---
Boron	ppm	ASTM D5185m	0	<1	1	---
Barium	ppm	ASTM D5185m	0	<1	0	---
Molybdenum	ppm	ASTM D5185m	60	57	58	---
Manganese	ppm	ASTM D5185m	0	0	<1	---
Magnesium	ppm	ASTM D5185m	1010	885	883	---
Calcium	ppm	ASTM D5185m	1070	1036	1072	---
Phosphorus	ppm	ASTM D5185m	1150	933	914	---
Zinc	ppm	ASTM D5185m	1270	1121	1189	---
Sulfur	ppm	ASTM D5185m	2060	2851	2911	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.6	16.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.5	7.2	---
Visc @ 100°C	cSt	ASTM D445	15.4	14.2	14.1	---

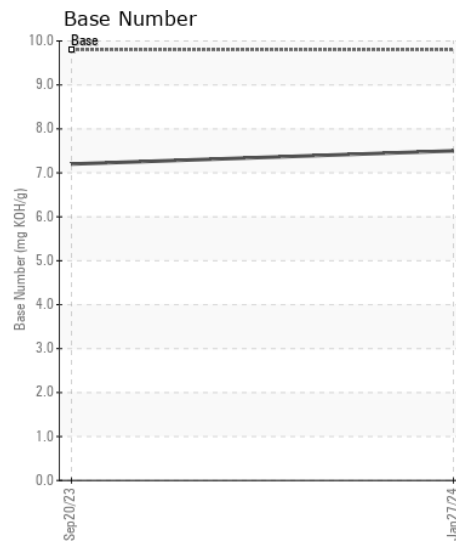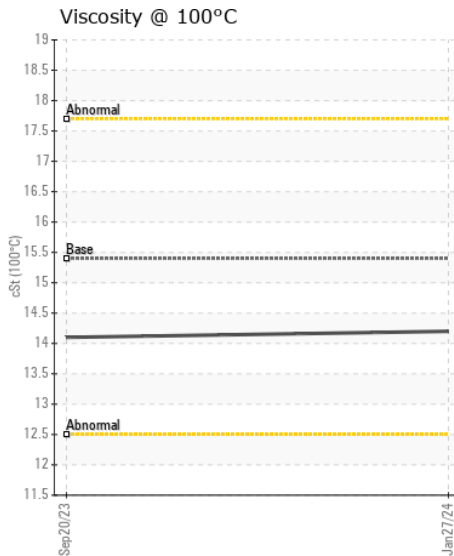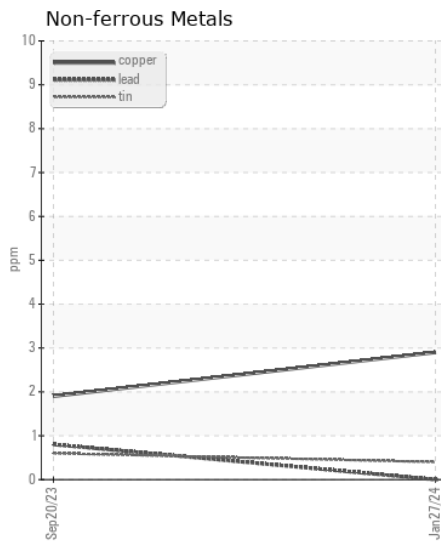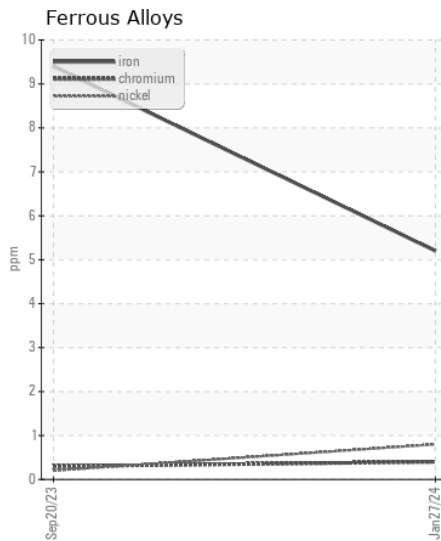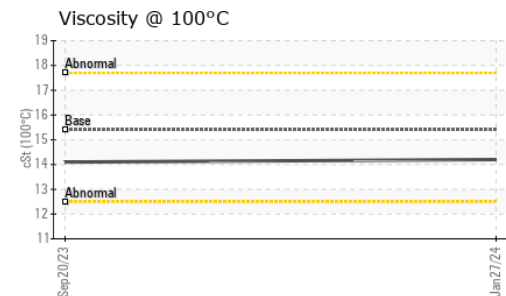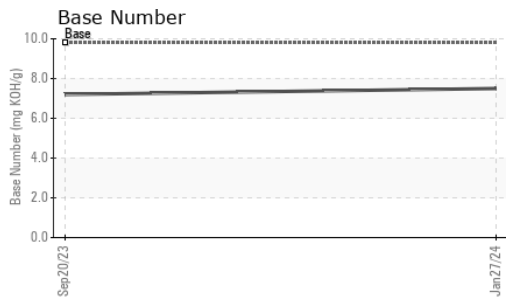

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0111180 **Received** : 01 Feb 2024
Lab Number : 06076684 **Diagnosed** : 02 Feb 2024
Unique Number : 10858775 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 960B - Pittsfield HC
 1335 W. Washington
 Pittsfield, IL
 US 62363

Contact: David Bradshaw
 david.bradshaw@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: