



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**116129**  
Component  
**Diesel Engine**  
Fluid  
**{not provided} (--- QTS)**

### RECOMMENDATION

No corrective action is recommended at this time. Please specify the brand, type, and viscosity of the oil on your next sample.

### WEAR

Metal levels are typical for a new component breaking in.








### CONTAMINATION

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>IL0033071</b>	---	---
Sample Date		Client Info		<b>22 Jan 2024</b>	---	---
Machine Age	mls	Client Info		<b>41363</b>	---	---
Oil Age	mls	Client Info		<b>41363</b>	---	---
Filter Age	mls	Client Info		<b>41363</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---
Iron	ppm	ASTM D5185m	>90	<b>39</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>38</b>	---	---
Lead	ppm	ASTM D5185m	>40	<b>4</b>	---	---
Copper	ppm	ASTM D5185m	>330	<b>17</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>4</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silicon	ppm	ASTM D5185m	>25	<b>34</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>107</b>	---	---
Fuel	%	ASTM D3524	>3.0	<b>0.5</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>6	<b>0.4</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.5</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.6</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Boron	ppm	ASTM D5185m		<b>49</b>	---	---
Barium	ppm	ASTM D5185m		<b>5</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>62</b>	---	---
Manganese	ppm	ASTM D5185m		<b>4</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>419</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1596</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>923</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1112</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>2667</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.9</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>4.8</b>	---	---
Visc @ 100°C	cSt	ASTM D445		<b>11.4</b>	---	---

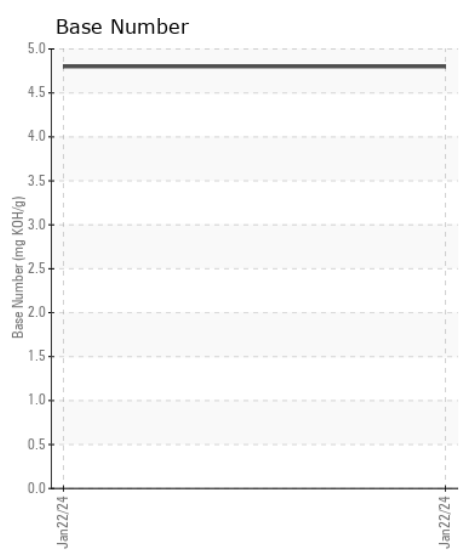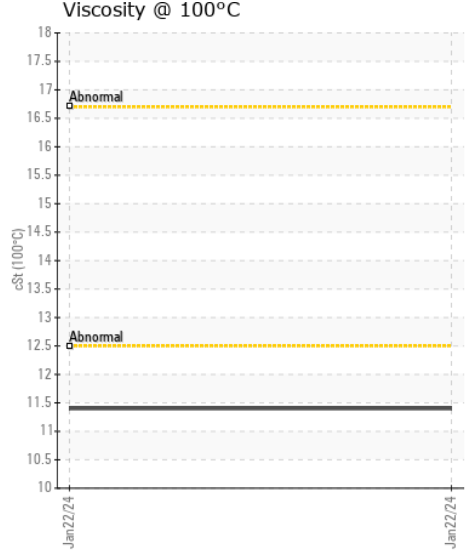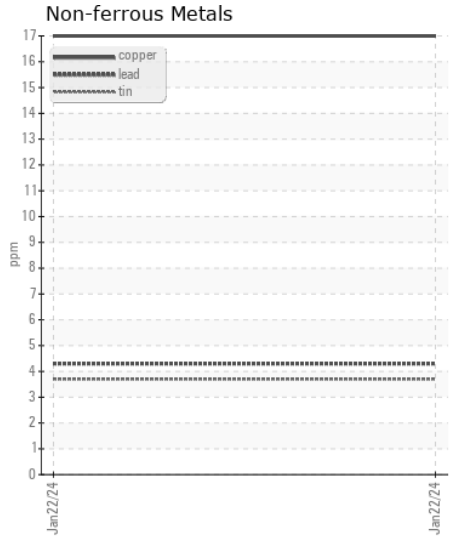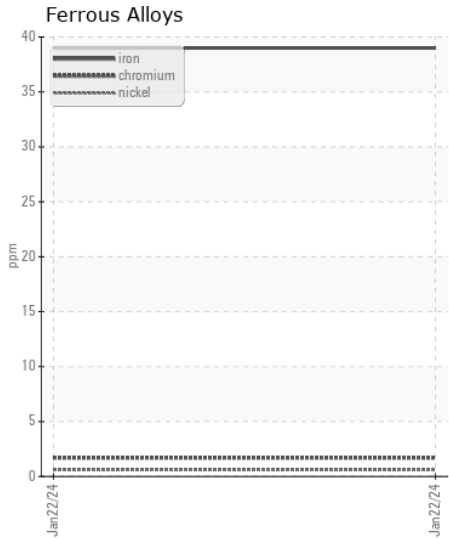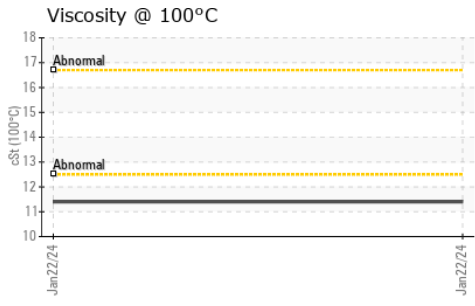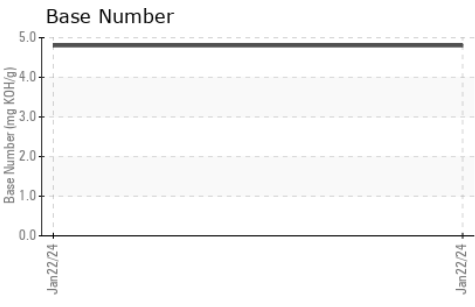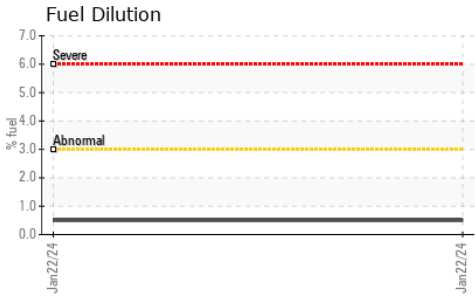

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL0033071 **Received** : 01 Feb 2024  
**Lab Number** : 06076702 **Tested** : 05 Feb 2024  
**Unique Number** : 10858793 **Diagnosed** : 05 Feb 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**IDEALEASE OF NORTHWEST WI**  
 611 HANSEN ROAD  
 GREEN BAY, WI  
 US 54304  
 Contact: GARY KOLTZ  
 gkoltz@pcitrucks.com  
 T: (920)499-6200  
 F: (920)499-5332

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)