



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
109564

Component
Diesel Engine

Fluid
SHELL ROTELLA T 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0033064	IL0027512	IL0027731
Sample Date		Client Info		24 Jan 2024	09 Jun 2023	27 Oct 2022
Machine Age	mls	Client Info		136460	117136	93024
Oil Age	mls	Client Info		19324	24112	18962
Filter Age	mls	Client Info		19324	24112	18962
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	35	35	35
Chromium	ppm	ASTM D5185m	>20	1	2	1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	13	13	17
Lead	ppm	ASTM D5185m	>40	0	1	0
Copper	ppm	ASTM D5185m	>330	2	1	1
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	11	7	8
Potassium	ppm	ASTM D5185m	>20	14	10	19
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	0.6	0.7
Nitration	Abs/cm	*ASTM D7624	>20	11.9	12.6	13.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.2	26.1	27.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	3	2
Boron	ppm	ASTM D5185m	316	45	▲ 28	45
Barium	ppm	ASTM D5185m	0.0	<1	0	0
Molybdenum	ppm	ASTM D5185m	1.2	36	92	44
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m	24	236	▲ 86	450
Calcium	ppm	ASTM D5185m	2292	1873	2367	1849
Phosphorus	ppm	ASTM D5185m	1064	942	1021	1043
Zinc	ppm	ASTM D5185m	1160	1157	1323	1406
Sulfur	ppm	ASTM D5185m	4996	3164	4409	3526
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.1	22.5	27.2
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	5.7	5	9.4
Visc @ 100°C	cSt	ASTM D445	15.7	13.6	13.4	13.9

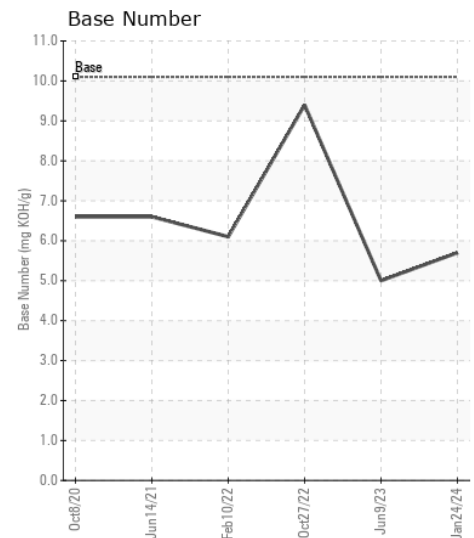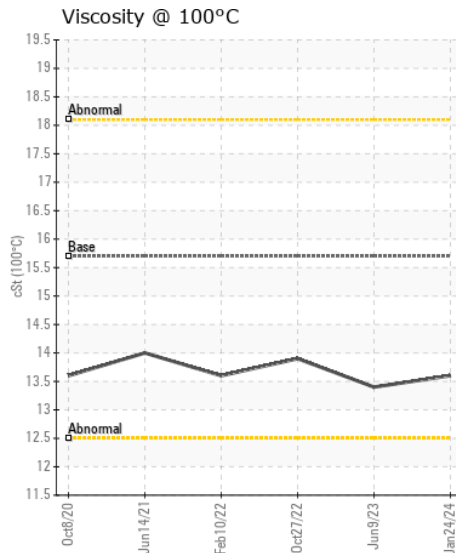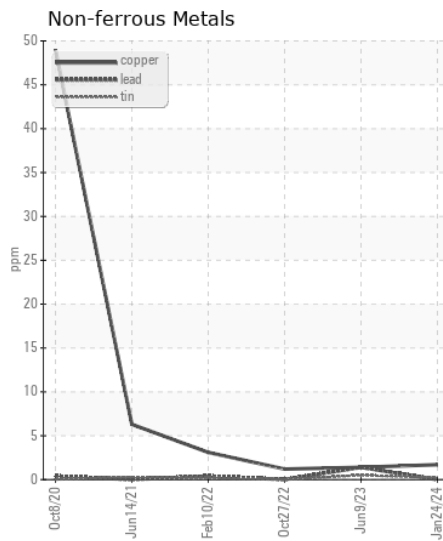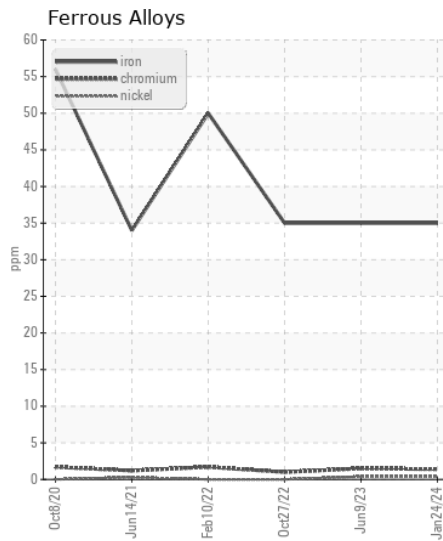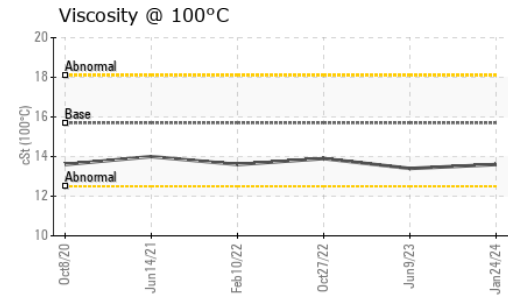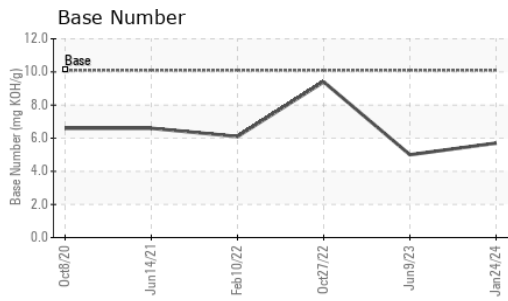

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0033064 **Received** : 01 Feb 2024
Lab Number : 06076703 **Diagnosed** : 02 Feb 2024
Unique Number : 10858794 **Diagnostician** : Wes Davis
Test Package : FLEET

IDEALASE OF NORTHWEST WI
 611 HANSEN ROAD
 GREEN BAY, WI
 US 54304
 Contact: GARY KOLTZ
 gkoltz@pcitrucks.com
 T: (920)499-6200
 F: (920)499-5332

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)