

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

## Machine Id 8772 Component Diesel Engine DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

.....

## **WEAR**

Metal levels are typical for a new component breaking in.

## CONTAMINATION


Elevated aluminum (AI) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

.....

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		NL0001787	NL0001740	
Sample Date		Client Info		30 Nov 2023	11 Aug 2023	
Machine Age	mls	Client Info		66112	22898	
Oil Age	mls	Client Info		45000	20000	
Filter Age	mls	Client Info		45000	20000	
Oil Changed		Client Info		Changed	Changed	
Filter Changed		Client Info		Changed	Changed	
Sample Status				NORMAL	ATTENTION	
Iron	ppm	ASTM D5185m	>100	34	32	
Chromium	ppm	ASTM D5185m	>20	<1	<1	
Nickel	ppm	ASTM D5185m	>4	<1	0	
Titanium	ppm	ASTM D5185m		<1	<1	
Silver	ppm	ASTM D5185m	>3	0	<1	
Aluminum	ppm	ASTM D5185m	>20	11	31	
Lead	ppm	ASTM D5185m	>40	0	0	
Copper	ppm	ASTM D5185m	>330	173	199	
Tin	ppm	ASTM D5185m	>15	4	2	
Vanadium	ppm	ASTM D5185m		0	0	
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Silicon	ppm	ASTM D5185m	>25	10	53	
Potassium	ppm	ASTM D5185m	>20	35	77	
Fuel		WC Method	>5	<1.0	0.5	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
Soot %	%	*ASTM D7844	>3	0.8	0.4	
Nitration	Abs/cm	*ASTM D7624	>20	10.8	9.2	
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.6	23.4	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	
Sodium		ASTM D5185m	>158	0	0	
Boron	ppm	ASTM D5185m	250	3	152	
	ppm					
Barium	ppm	ASTM D5185m	10	<1	0 112	
Molybdenum	ppm	ASTM D5185m	100	69		
Manganese	ppm	ASTM D5185m ASTM D5185m	150	1	2	
Magnesium	ppm		450	887 1127	767	
Calcium	ppm	ASTM D5185m	3000	1137	1575	
Phosphorus	ppm	ASTM D5185m	1150	936	758	
Zinc	ppm	ASTM D5185m	1350	1116	956	
Sulfur	ppm	ASTM D5185m	4250	2172	3275	
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.7	21.0	
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.6	7.4	
Visc @ 100°C	cSt	ASTM D445	14.4	13.2	10.2	

## **FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

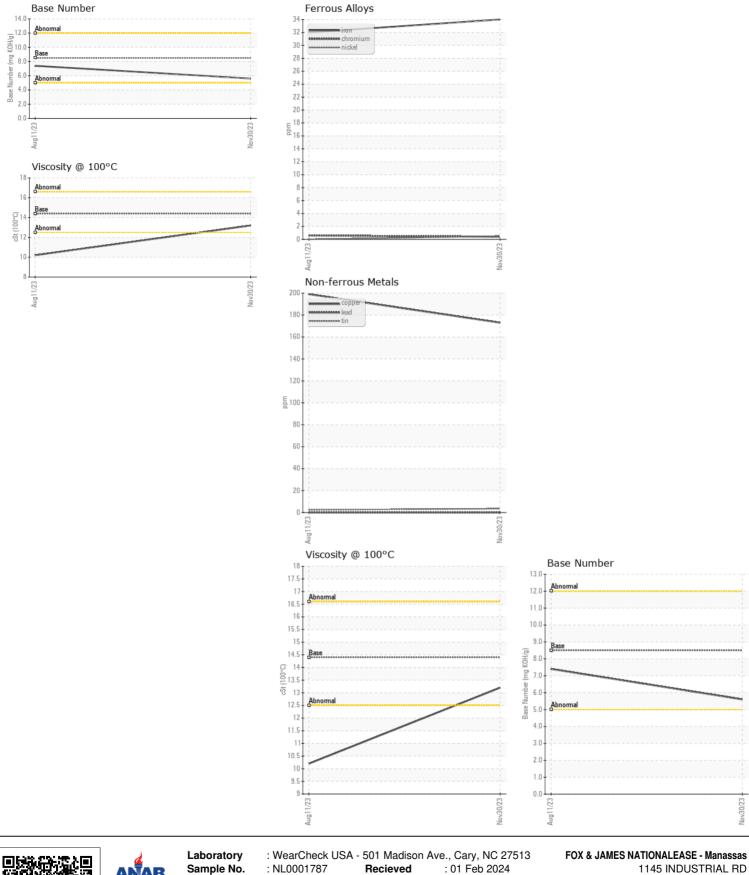

 Viewer/weaking
 Unique Number
 : 10858801
 Diagnostician
 : Wes Davis

 Certificate L2367
 Test Package
 : FLEET

 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 j

 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 j

 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnosed

:06076710

: 02 Feb 2024

1145 INDUSTRIAL RD MANASSAS, VA US 20109 Contact: JOSH ROLAND j.roland@foxandjames.com T: (571)379-5296 12) F:

Lab Number

Contact/Location: JOSH ROLAND - FOXMAN