



**LEAHY-WOLF**  
Lubricating specialists since 1946

**OIL ANALYSIS REPORT**

|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |



Machine Id  
**MACK 3014**  
Component  
**Front Center Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>LW0008624</b>   | LW0007846   | LW0006647   |
| Sample Date    |     | Client Info |           | <b>27 Jan 2024</b> | 06 Nov 2023 | 26 Apr 2023 |
| Machine Age    | hrs | Client Info |           | <b>0</b>           | 0           | 0           |
| Oil Age        | hrs | Client Info |           | <b>0</b>           | 0           | 0           |
| Filter Age     | hrs | Client Info |           | <b>0</b>           | 0           | 0           |
| Oil Changed    |     | Client Info |           | <b>N/A</b>         | N/A         | N/A         |
| Filter Changed |     | Client Info |           | <b>N/A</b>         | N/A         | N/A         |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | ABNORMAL    |

**WEAR**

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >120 | <b>10</b>    | 17   | 47   |
| Chromium     | ppm    | ASTM D5185m | >20  | <b>&lt;1</b> | <1   | 1    |
| Nickel       | ppm    | ASTM D5185m | >5   | <b>5</b>     | 6    | ▲ 21 |
| Titanium     | ppm    | ASTM D5185m | >2   | <b>&lt;1</b> | 0    | 0    |
| Silver       | ppm    | ASTM D5185m | >2   | <b>0</b>     | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >20  | <b>2</b>     | 2    | ▲ 5  |
| Lead         | ppm    | ASTM D5185m | >40  | <b>0</b>     | <1   | 0    |
| Copper       | ppm    | ASTM D5185m | >330 | <b>25</b>    | 53   | 239  |
| Tin          | ppm    | ASTM D5185m | >15  | <b>1</b>     | 2    | 4    |
| Vanadium     | ppm    | ASTM D5185m |      | <b>0</b>     | 0    | 0    |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

**CONTAMINATION**











There is no indication of any contamination in the oil.

|                  |          |             |       |                |       |       |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >25   | <b>2</b>       | 4     | ▲ 57  |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>3</b>       | 2     | 8     |
| Fuel             |          | WC Method   | >3.0  | <b>&lt;1.0</b> | <1.0  | 0.2   |
| Water            |          | WC Method   | >0.2  | <b>NEG</b>     | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 | >4    | <b>0.7</b>     | 0.8   | 0.6   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>8.4</b>     | 9.1   | 10.4  |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>20.3</b>    | 21.4  | 23.4  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.2  | <b>NEG</b>     | NEG   | NEG   |

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |              |      |      |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium           | ppm      | ASTM D5185m | >216 | <b>0</b>     | 3    | 2    |
| Boron            | ppm      | ASTM D5185m | 250  | <b>&lt;1</b> | 1    | 213  |
| Barium           | ppm      | ASTM D5185m | 10   | <b>&lt;1</b> | 0    | 0    |
| Molybdenum       | ppm      | ASTM D5185m | 100  | <b>60</b>    | 57   | 109  |
| Manganese        | ppm      | ASTM D5185m |      | <b>&lt;1</b> | <1   | 4    |
| Magnesium        | ppm      | ASTM D5185m | 450  | <b>903</b>   | 1023 | 767  |
| Calcium          | ppm      | ASTM D5185m | 3000 | <b>1040</b>  | 1137 | 1553 |
| Phosphorus       | ppm      | ASTM D5185m | 1150 | <b>948</b>   | 972  | 721  |
| Zinc             | ppm      | ASTM D5185m | 1350 | <b>1151</b>  | 1310 | 929  |
| Sulfur           | ppm      | ASTM D5185m | 4250 | <b>2772</b>  | 2382 | 2619 |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>15.9</b>  | 17.3 | 21.0 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 8.5  | <b>7.4</b>   | 7.3  | 7.7  |
| Visc @ 100°C     | cSt      | ASTM D445   | 14.4 | <b>13.7</b>  | 13.4 | 10.5 |

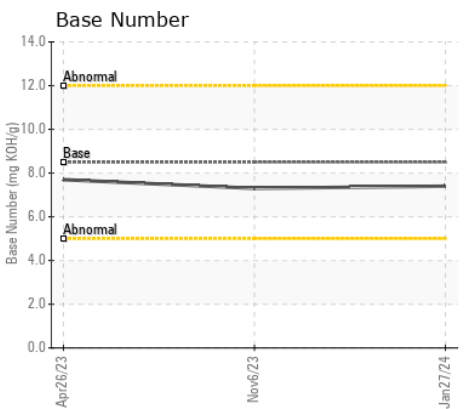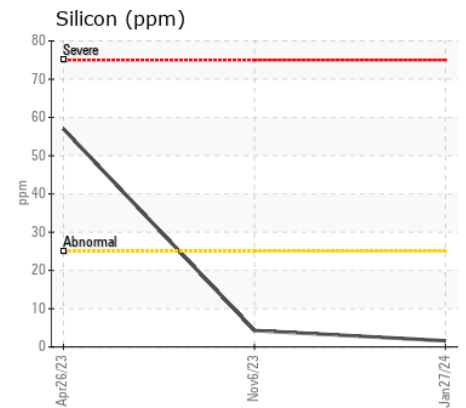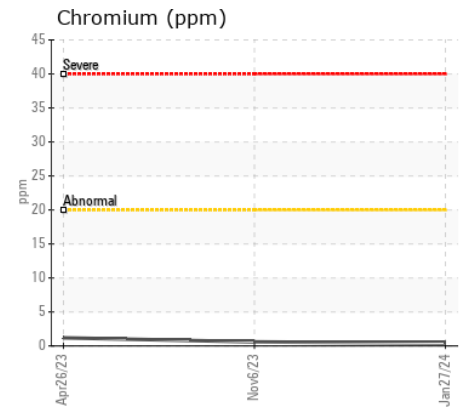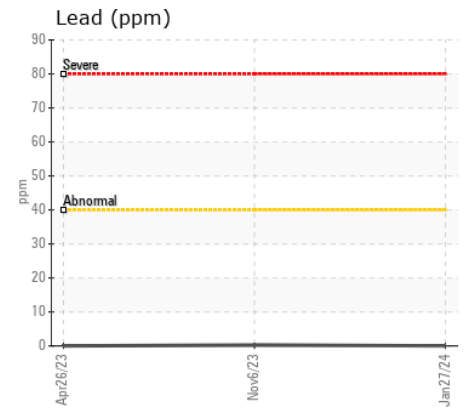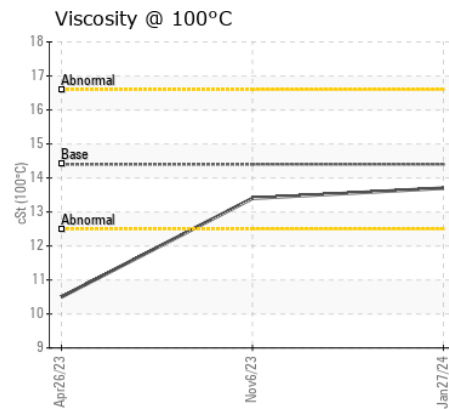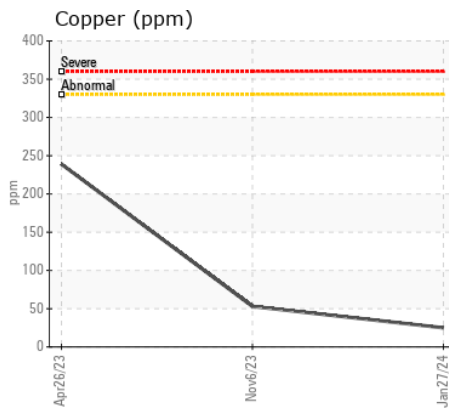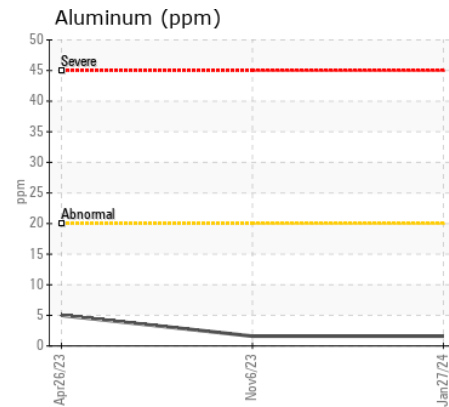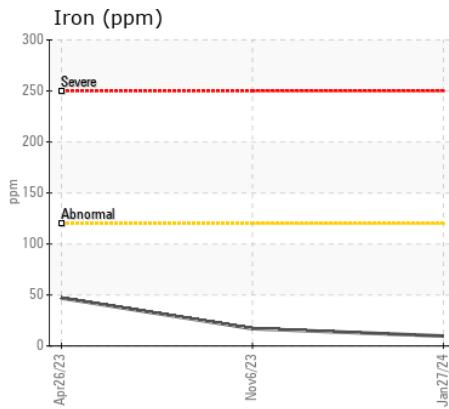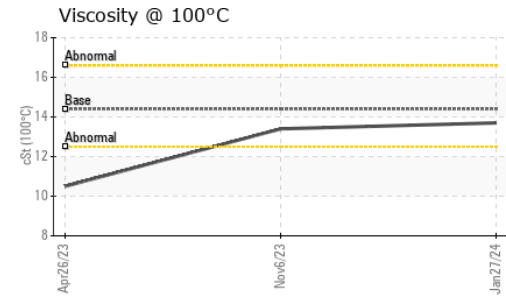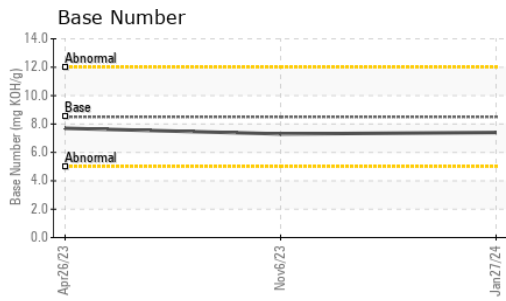

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LW0008624 **Recieved** : 01 Feb 2024  
**Lab Number** : 06076729 **Diagnosed** : 02 Feb 2024  
**Unique Number** : 10858820 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**LRS - NILES**  
 33541 REUM RD  
 NILES, MI  
 US 49120  
 Contact: JOHN HUGHES  
 johnh@michianarecyclinganddisposal.com  
 T: (269)684-0900 X:124  
 F: