



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 60G 1FF060GXHNJ295071

Component
Diesel Engine

Fluid
{not provided} (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0202920	---	---
Sample Date		Client Info		30 Jan 2024	---	---
Machine Age	hrs	Client Info		269	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	25	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	5	---	---
Lead	ppm	ASTM D5185m	>26	0	---	---
Copper	ppm	ASTM D5185m	>26	7	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









Sodium and/or potassium levels are high. Fuel content negligible. Test for glycol is negative.

Silicon	ppm	ASTM D5185m	>22	49	---	---
Potassium	ppm	ASTM D5185m	>20	236	---	---
Fuel	%	ASTM D3524	>2.1	0.3	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol	%	*ASTM D2982		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	15	---	---
Boron	ppm	ASTM D5185m		248	---	---
Barium	ppm	ASTM D5185m		6	---	---
Molybdenum	ppm	ASTM D5185m		201	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		21	---	---
Calcium	ppm	ASTM D5185m		2531	---	---
Phosphorus	ppm	ASTM D5185m		766	---	---
Zinc	ppm	ASTM D5185m		878	---	---
Sulfur	ppm	ASTM D5185m		3069	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.0	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.7	---	---
Visc @ 100°C	cSt	ASTM D445		10.2	---	---

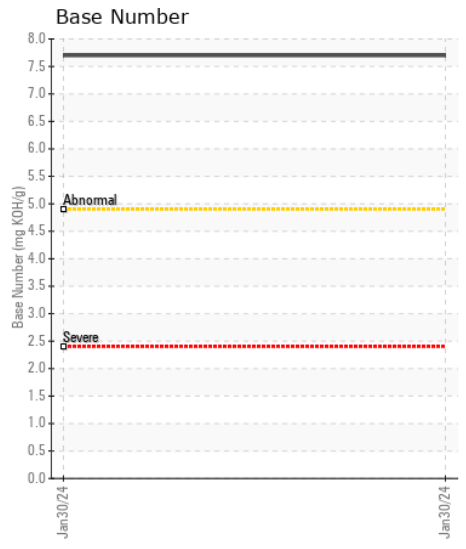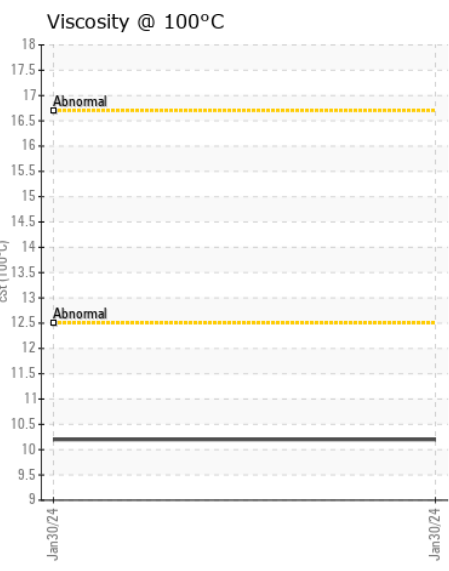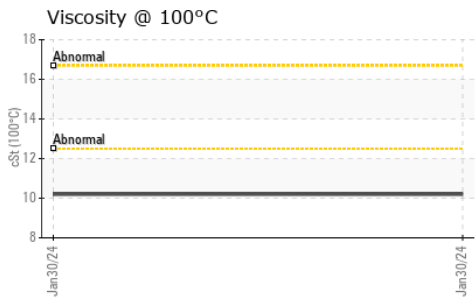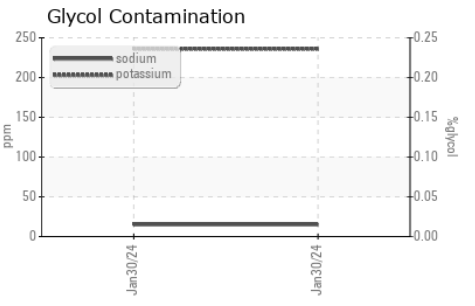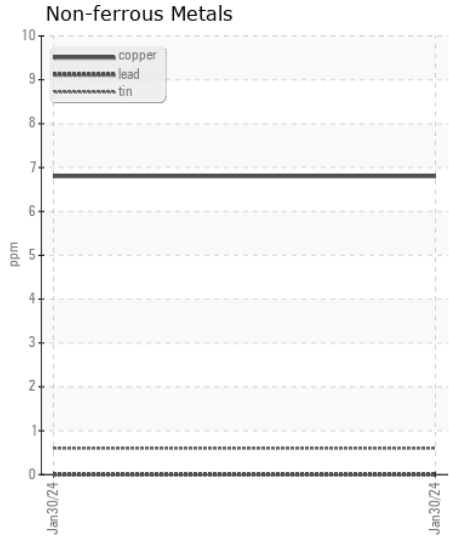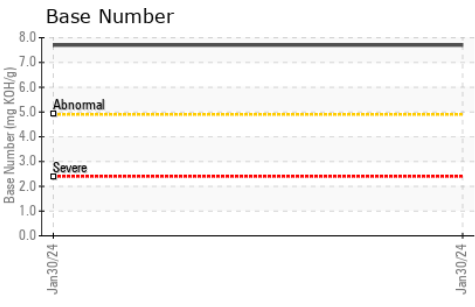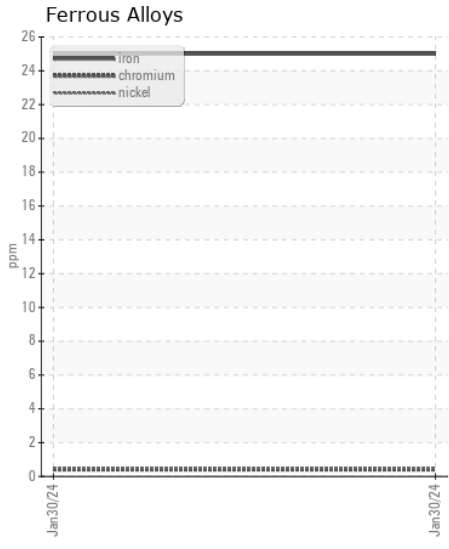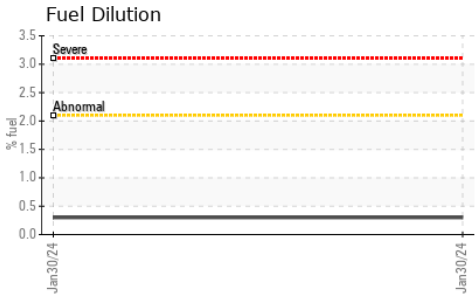

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0202920 **Received** : 01 Feb 2024
Lab Number : 06076751 **Tested** : 05 Feb 2024
Unique Number : 10858842 **Diagnosed** : 05 Feb 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, Glycol, PercentFuel, TBN)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111
 Contact: DON VEST
 dvest@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)