



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
I4504
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0033145	IL0029440	IL0029454
Sample Date		Client Info		27 Dec 2023	15 Sep 2023	16 Jun 2023
Machine Age	mls	Client Info		77325	73563	70819
Oil Age	mls	Client Info		3762	2744	4412
Filter Age	mls	Client Info		3762	2744	4412
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	7	8	12
Chromium	ppm	ASTM D5185m	>20	<1	<1	1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	2	2
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	1	<1	2
Tin	ppm	ASTM D5185m	>15	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	9	9	9
Potassium	ppm	ASTM D5185m	>20	1	<1	4
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.3	0.5
Nitration	Abs/cm	*ASTM D7624	>20	8.5	7.5	8.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.1	17.8	20.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	2	2
Boron	ppm	ASTM D5185m	0	101	83	57
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	119	105	78
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	0	660	712	759
Calcium	ppm	ASTM D5185m		1184	1245	1353
Phosphorus	ppm	ASTM D5185m		748	752	884
Zinc	ppm	ASTM D5185m		850	928	1071
Sulfur	ppm	ASTM D5185m		3083	3021	3771
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.1	14.0	15.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	7.0	7.4	8.8
Visc @ 100°C	cSt	ASTM D445	14	13.2	13.5	13.4

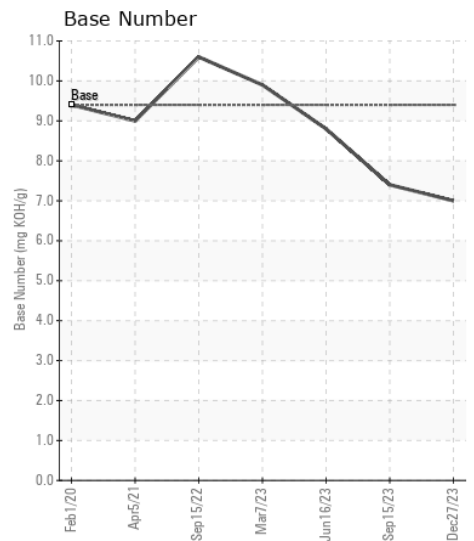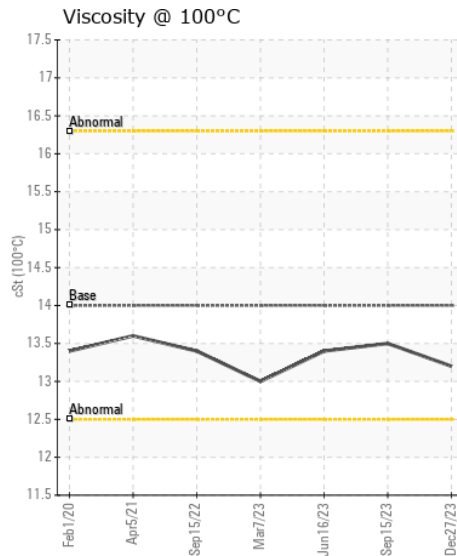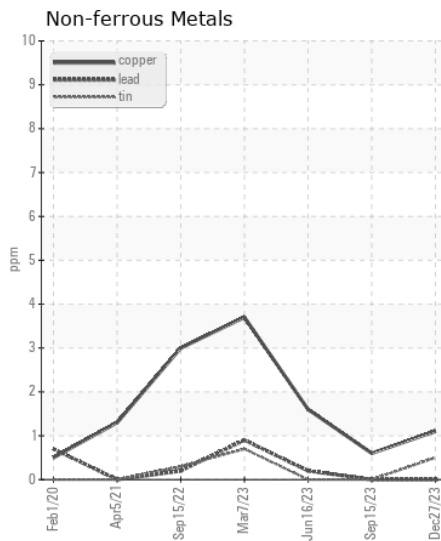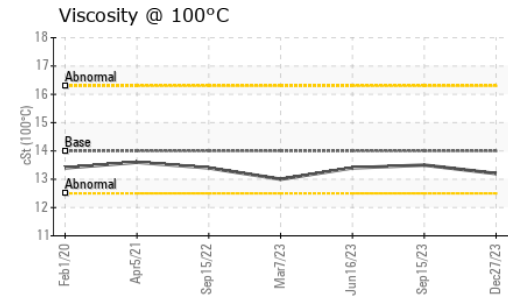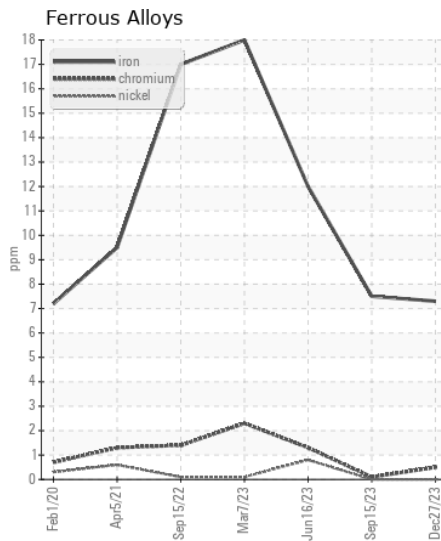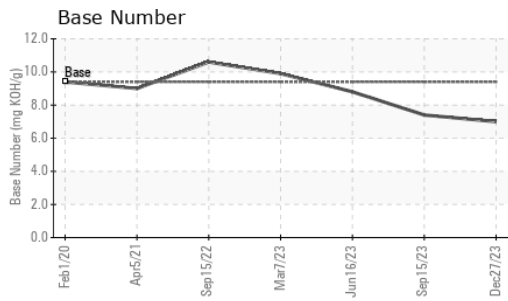

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0033145 **Received** : 01 Feb 2024
Lab Number : 06077474 **Diagnosed** : 04 Feb 2024
Unique Number : 10859565 **Diagnostician** : Don Baldrige
Test Package : FLEET

RUSH TRUCK LEASING - BOISE IDEALEASE
 770 WEST AMITY ROAD
 BOISE, ID
 US 83705
 Contact: MATT BORCHARDT
 borchardtm@rushenterprises.com
 T:
 F: (208)639-4859

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)