



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>ATTENTION</b>

Area

**(3333011) Dairy Farms of America-Tractor**

Machine Id

**[Dairy Farms of America-Tractor] 268A723067**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 10W30 (11 GAL)**

**RECOMMENDATION**

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0103927</b>	---	---
Sample Date		Client Info		<b>26 Jan 2024</b>	---	---
Machine Age	mls	Client Info		<b>79297</b>	---	---
Oil Age	mls	Client Info		<b>40000</b>	---	---
Filter Age	mls	Client Info		<b>40000</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>ATTENTION</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	<b>46</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>3</b>	---	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>30	<b>20</b>	---	---
Lead	ppm	ASTM D5185m	>30	<b>2</b>	---	---
Copper	ppm	ASTM D5185m	>150	<b>147</b>	---	---
Tin	ppm	ASTM D5185m	>5	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.


Silicon	ppm	ASTM D5185m	>20	<b>9</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>49</b>	---	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>3	<b>1.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.0</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.8</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**


The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m		<b>3</b>	---	---
Boron	ppm	ASTM D5185m	2	<b>53</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	50	<b>92</b>	---	---
Manganese	ppm	ASTM D5185m	0	<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m	950	<b>501</b>	---	---
Calcium	ppm	ASTM D5185m	1050	<b>1413</b>	---	---
Phosphorus	ppm	ASTM D5185m	995	<b>689</b>	---	---
Zinc	ppm	ASTM D5185m	1180	<b>823</b>	---	---
Sulfur	ppm	ASTM D5185m	2600	<b>2034</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.8</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.5</b>	---	---
Visc @ 100°C	cSt	ASTM D445	12.00	<b>▲ 14.0</b>	---	---


▲ Viscosity @ 100°C

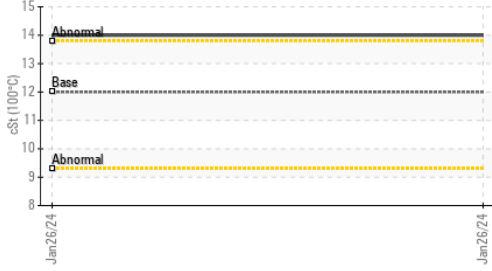


Ferrous Alloys

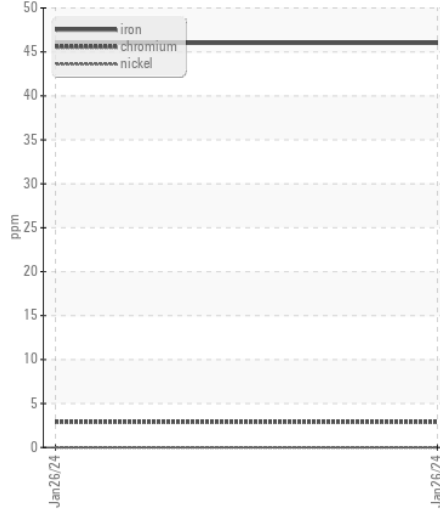


Glycol Contamination

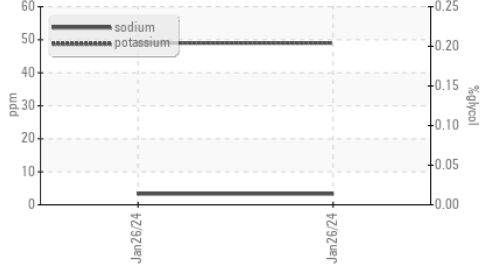


Non-ferrous Metals

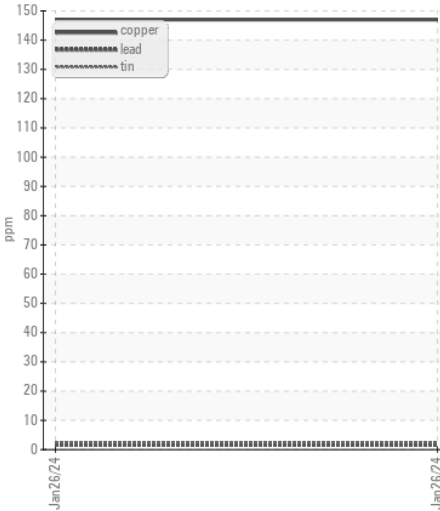


Base Number

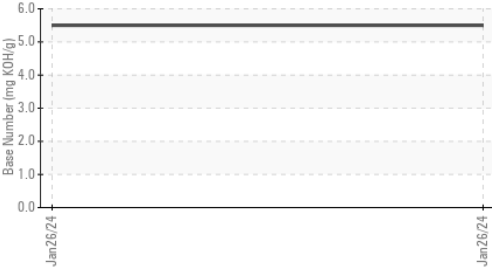


Aluminum (ppm)

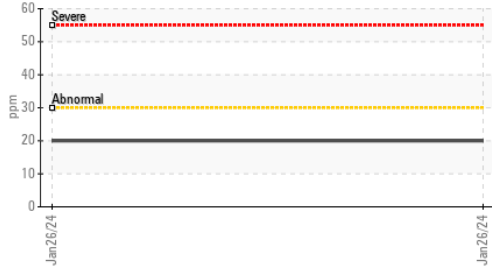

▲ Viscosity @ 100°C

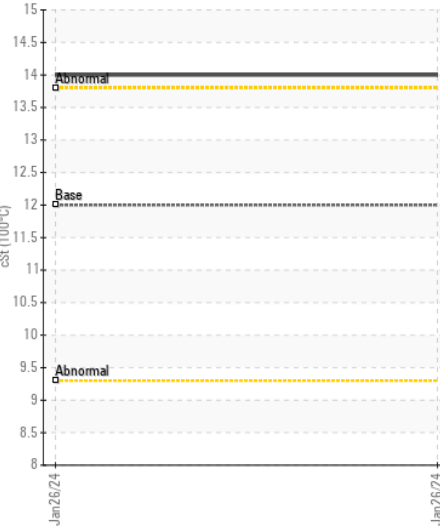

Base Number

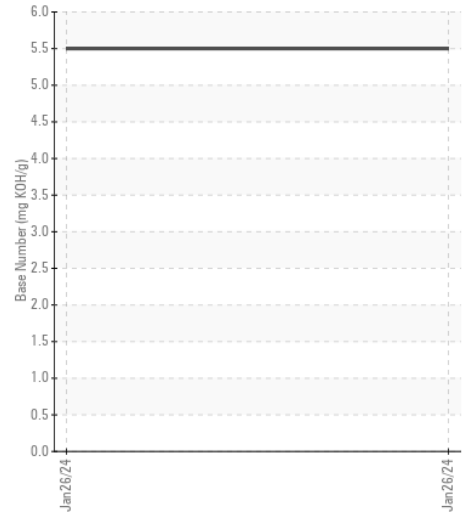

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : PCA0103927  
 Lab Number : 06077483  
 Unique Number : 10859574  
 Test Package : FLEET

Transervice - Shop 2680 - LeMars  
 1330 12th Ave SW  
 LeMars, IA  
 US 51031

Contact: Stacey Rabey  
 srabey@transervice.com  
 T: (712)501-9908

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: