



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 524K 1DW524KZHCE643734**  
Component  
**Transmission (Manual)**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0199949</b>	JR0147398	JR0125177
Sample Date		Client Info		<b>05 Feb 2024</b>	16 Feb 2023	21 Jul 2022
Machine Age	hrs	Client Info		<b>16065</b>	14647	13720
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	<b>12</b>	21	21
Iron	ppm	ASTM D5185m	>200	<b>17</b>	22	22
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>7	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	3	0
Lead	ppm	ASTM D5185m	>45	<b>&lt;1</b>	<1	3
Copper	ppm	ASTM D5185m	>225	<b>2</b>	1	1
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	<b>4</b>	8	6
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	0	<1
Boron	ppm	ASTM D5185m	6	<b>6</b>	4	17
Barium	ppm	ASTM D5185m	0	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	1
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	145	<b>84</b>	80	81
Calcium	ppm	ASTM D5185m	3570	<b>3176</b>	3431	3891
Phosphorus	ppm	ASTM D5185m	1290	<b>867</b>	1002	1064
Zinc	ppm	ASTM D5185m	1640	<b>1262</b>	1199	1270
Sulfur	ppm	ASTM D5185m		<b>3225</b>	3411	4458
Visc @ 40°C	cSt	ASTM D445	57.0	<b>55.0</b>	54.2	54.9

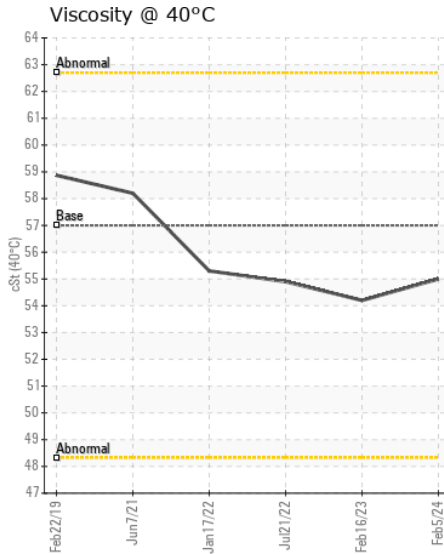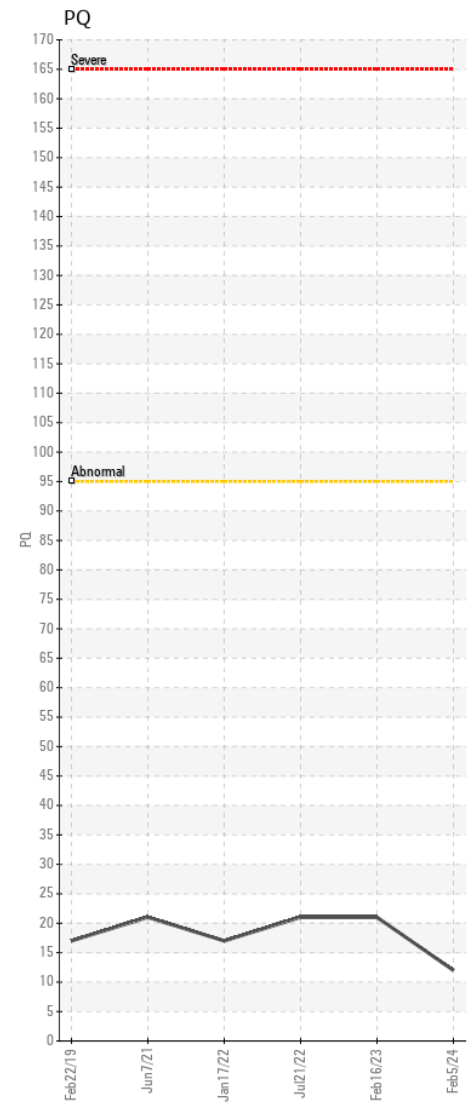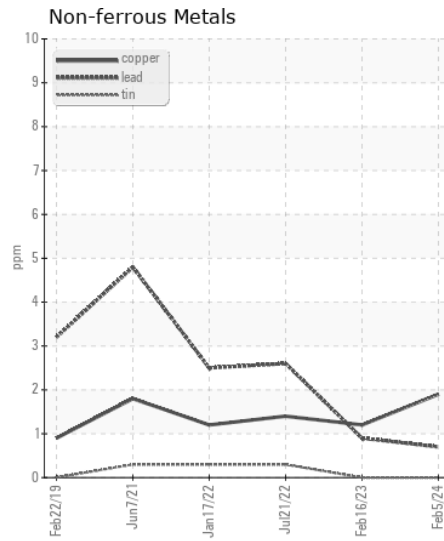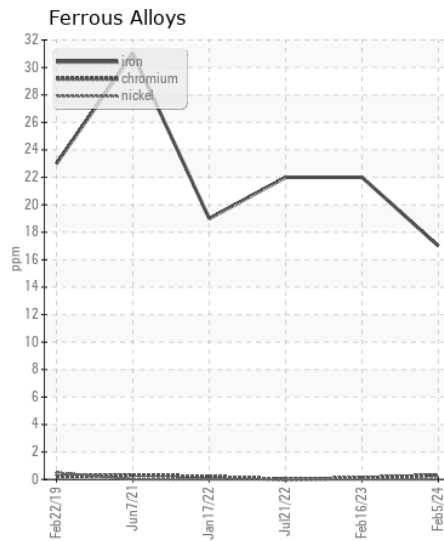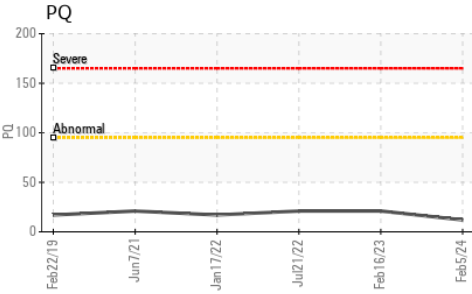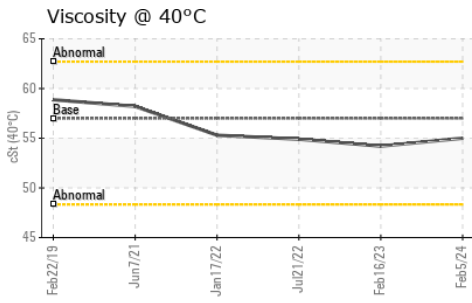

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0199949 **Received** : 07 Feb 2024  
**Lab Number** : 06082711 **Tested** : 08 Feb 2024  
**Unique Number** : 10870156 **Diagnosed** : 08 Feb 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292