



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[W49531]**

Machine Id

**JOHN DEERE 160G 1FF160GXPMF058243**

Component

**Pump Drive**

Fluid

**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0200192</b>	---	---
Sample Date		Client Info		<b>05 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>955</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Test	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>17</b>	---	---
Iron	ppm	ASTM D5185m	>151	<b>97</b>	---	---
Chromium	ppm	ASTM D5185m	>11	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>21	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>51	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>51	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	>4	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	<b>21</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	<b>0</b>	---	---
Boron	ppm	ASTM D5185m		<b>58</b>	---	---
Barium	ppm	ASTM D5185m		<b>6</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>112</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>17</b>	---	---
Calcium	ppm	ASTM D5185m		<b>3934</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>1061</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1384</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>8538</b>	---	---
Visc @ 40°C	cSt	ASTM D445	117	<b>66.2</b>	---	---

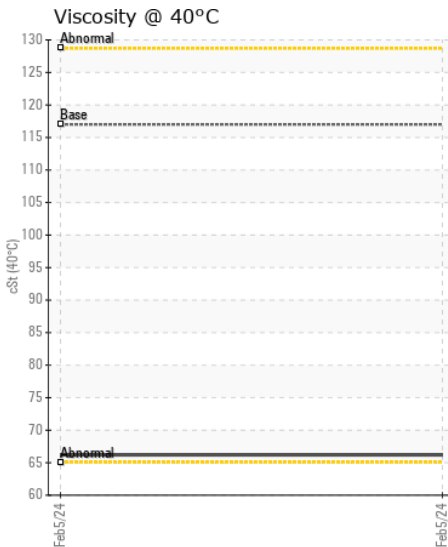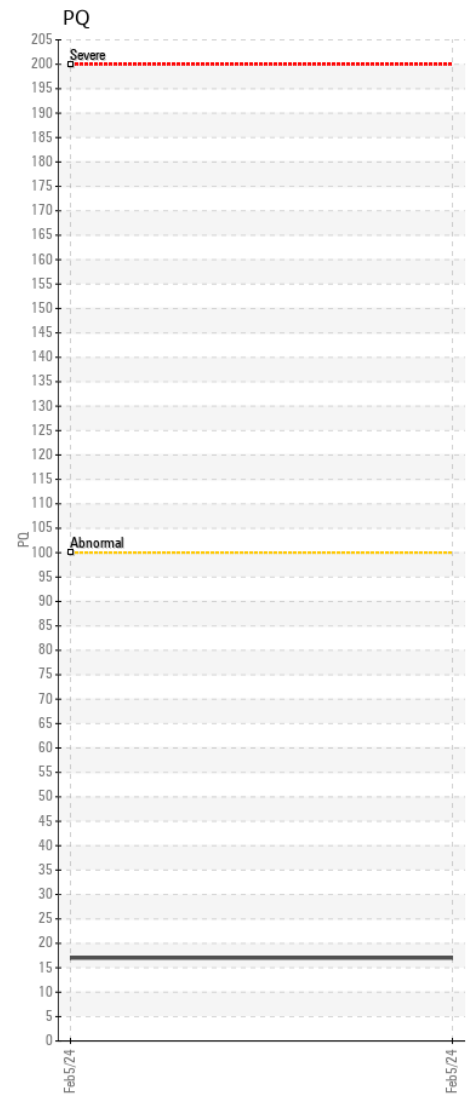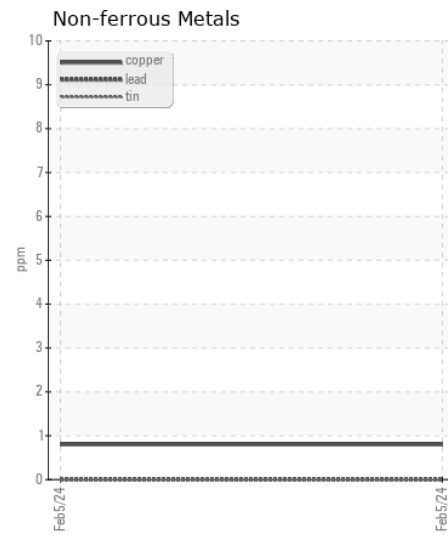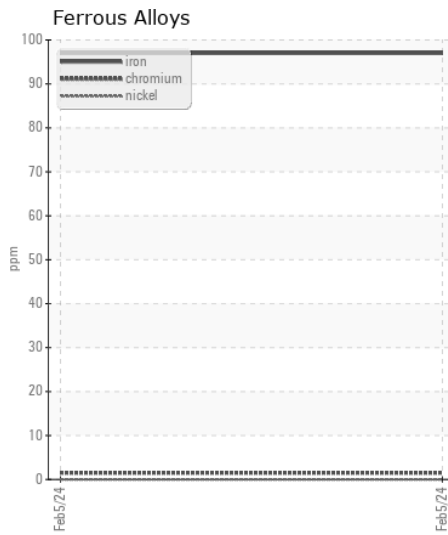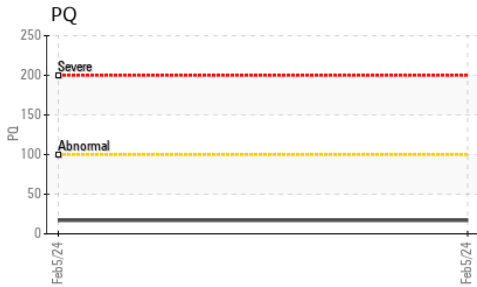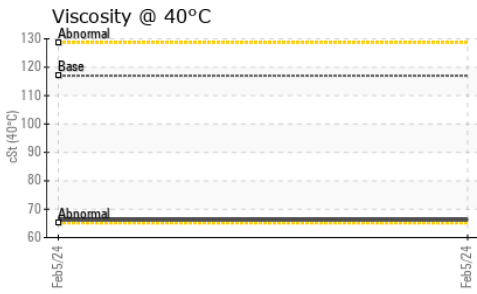

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0200192

Lab Number : 06082756

Unique Number : 10870201

Test Package : CONST ( Additional Tests: PQ )

Received : 07 Feb 2024

Tested : 08 Feb 2024

Diagnosed : 09 Feb 2024 - Sean Felton

JRE - ASHLAND

11047 LEADBETTER RD

ASHLAND, VA

US 23005

Contact: DAVID ZIEG

dzieg@jamesriverequipment.com

T: (804)798-6001

F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)