



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[W/O 10292]**  
Machine Id  
**VOLVO L90H 625919**  
Component  
**Diesel Engine**  
Fluid  
**VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (5 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ML0000144</b>	---	---
Sample Date		Client Info		<b>05 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>3630</b>	---	---
Oil Age	hrs	Client Info		<b>500</b>	---	---
Filter Age	hrs	Client Info		<b>500</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>59</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>2</b>	---	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>5</b>	---	---
Lead	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>6</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.9</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.4</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Boron	ppm	ASTM D5185m	2.5	<b>326</b>	---	---
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	0.7	<b>85</b>	---	---
Manganese	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	256	<b>425</b>	---	---
Calcium	ppm	ASTM D5185m	2057	<b>1311</b>	---	---
Phosphorus	ppm	ASTM D5185m	935	<b>1058</b>	---	---
Zinc	ppm	ASTM D5185m	1223	<b>1256</b>	---	---
Sulfur	ppm	ASTM D5185m	4079	<b>3139</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.5</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>6.5</b>	---	---
Visc @ 100°C	cSt	ASTM D445	15.0	<b>13.5</b>	---	---

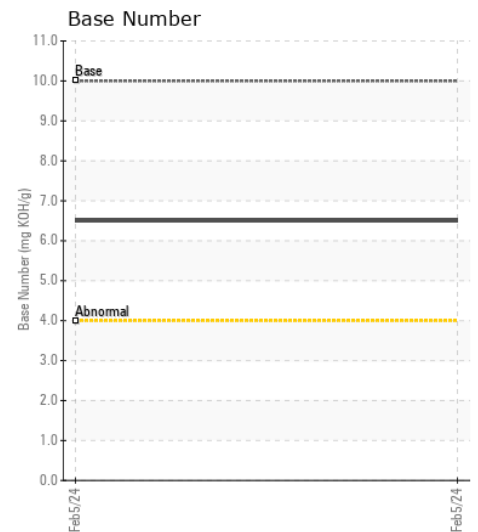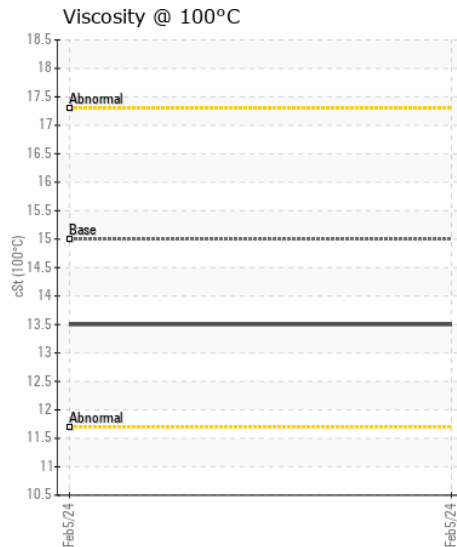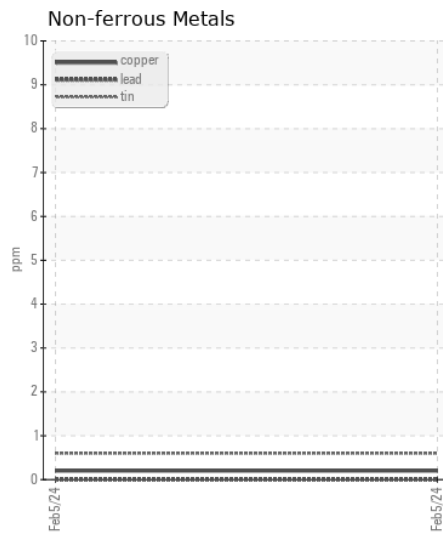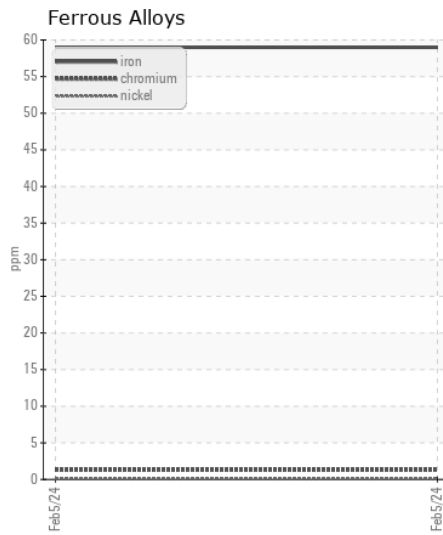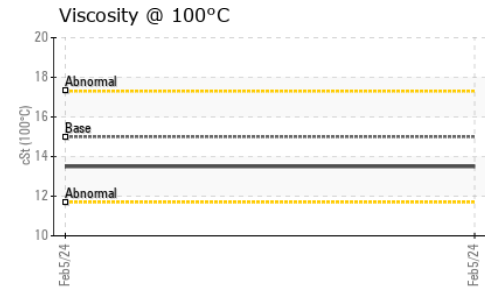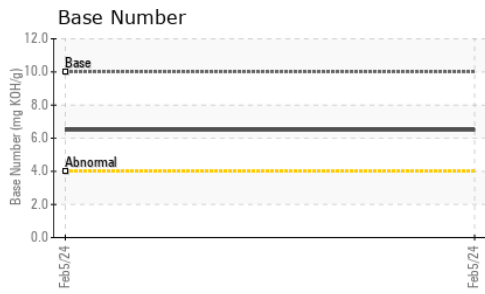

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0000144 **Received** : 07 Feb 2024  
**Lab Number** : 06082926 **Tested** : 08 Feb 2024  
**Unique Number** : 10870371 **Diagnosed** : 09 Feb 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: TBN )

**MCCLUNG-LOGAN EQUIPMENT CO - BALTIMORE**  
 4601 WASHINGTON BOULEVARD  
 BALTIMORE, MD  
 US 21227

Contact: MARK CIULLA  
 mciulla@mcclung-logan.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (410)242-6500  
 F: (410)242-7835