



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**[AFTER]**  
 Machine Id  
**M88A2**  
 Component  
**Auxiliary Power Unit Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0776948</b>	WC0776930	---
Sample Date		Client Info		<b>15 Dec 2023</b>	06 Dec 2023	---
Machine Age	mls	Client Info		<b>0</b>	0	---
Oil Age	mls	Client Info		<b>0</b>	0	---
Filter Age	mls	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>4</b>	0	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	<1	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>17</b>	7	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0</b>	0	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>4.2</b>	4.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.2</b>	17.2	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>1</b>	<1	---
Boron	ppm	ASTM D5185m	250	<b>5</b>	6	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	100	<b>57</b>	56	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m	450	<b>930</b>	923	---
Calcium	ppm	ASTM D5185m	3000	<b>947</b>	950	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1049</b>	1048	---
Zinc	ppm	ASTM D5185m	1350	<b>1213</b>	1216	---
Sulfur	ppm	ASTM D5185m	4250	<b>3092</b>	3077	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>12.8</b>	12.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>9.9</b>	10.0	---
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.9</b>	14.9	---

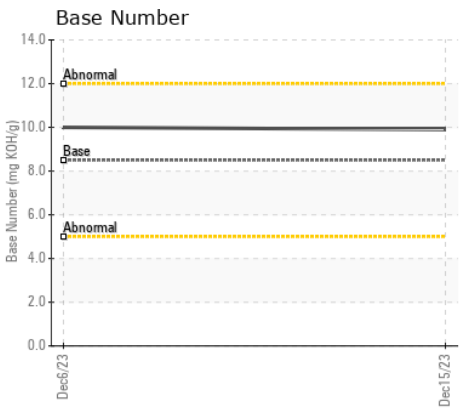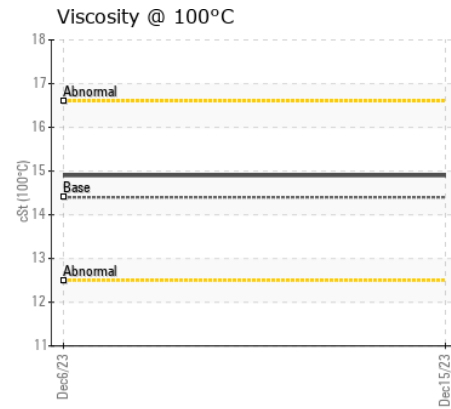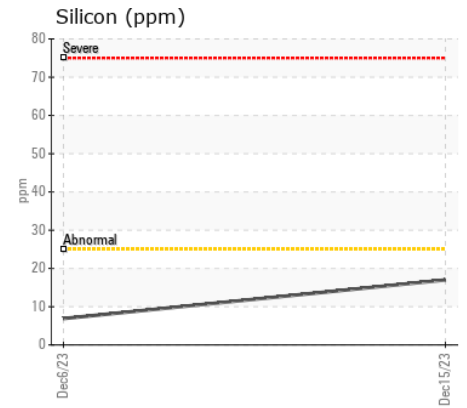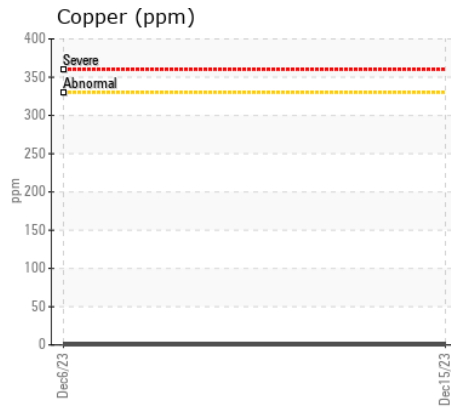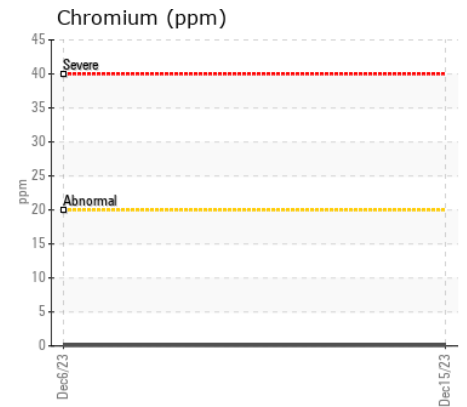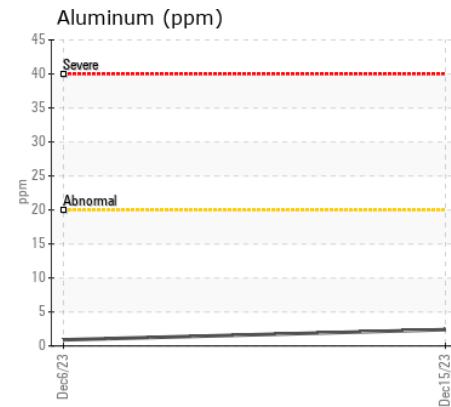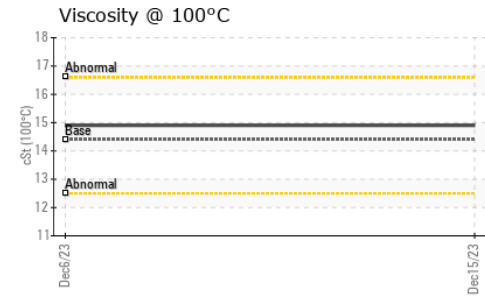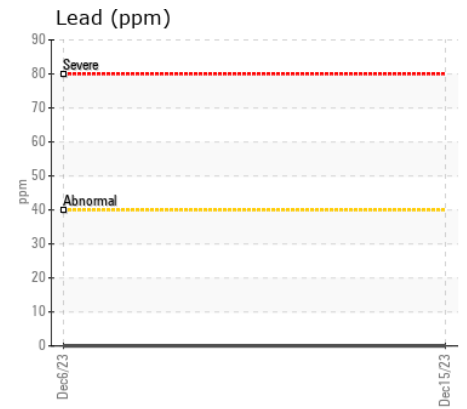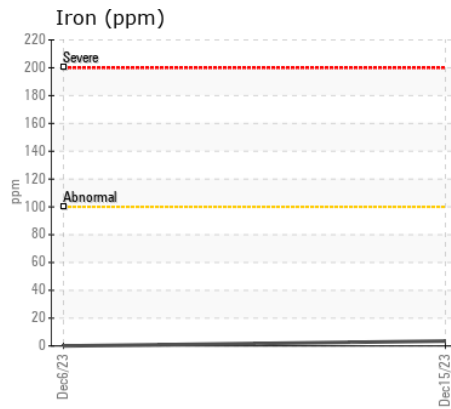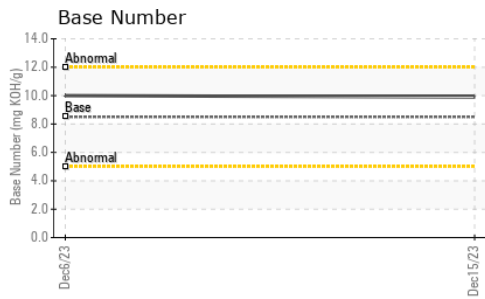

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0776948 **Received** : 07 Feb 2024  
**Lab Number** : 06082953 **Tested** : 08 Feb 2024  
**Unique Number** : 10870398 **Diagnosed** : 08 Feb 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**BAE SYSTEMS**  
 1100 BAIRS RD  
 YORK, PA  
 US 17408

Contact: DOUG RUSSO  
 doug.russo@baesystems.com  
 T: (717)524-0737  
 F: (717)225-8311

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)