



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HOBBS CRUSHER 2

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KL0014004	KL0014054	KL0012932
Sample Date		Client Info		26 Jan 2024	27 Dec 2023	06 Nov 2023
Machine Age	hrs	Client Info		0	3680	45160
Oil Age	hrs	Client Info		0	0	45160
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	<1	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>75	1	<1	0
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>20	2	0	2
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647		2172	2558	1369
Particles >6µm		ASTM D7647	>1300	318	708	316
Particles >14µm		ASTM D7647	>160	24	40	26
Particles >21µm		ASTM D7647	>40	9	9	5
Particles >38µm		ASTM D7647	>10	1	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>17/14	15/12	17/12	15/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	2	0
Boron	ppm	ASTM D5185m	5	<1	0	<1
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	5	2	<1	<1
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	25	1	3	5
Calcium	ppm	ASTM D5185m	200	976	920	960
Phosphorus	ppm	ASTM D5185m	300	585	533	575
Zinc	ppm	ASTM D5185m	370	670	569	669
Sulfur	ppm	ASTM D5185m	2500	1889	1509	1871
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.68	0.67	0.47
Visc @ 40°C	cSt	ASTM D445	46	47.1	47.3	48.2

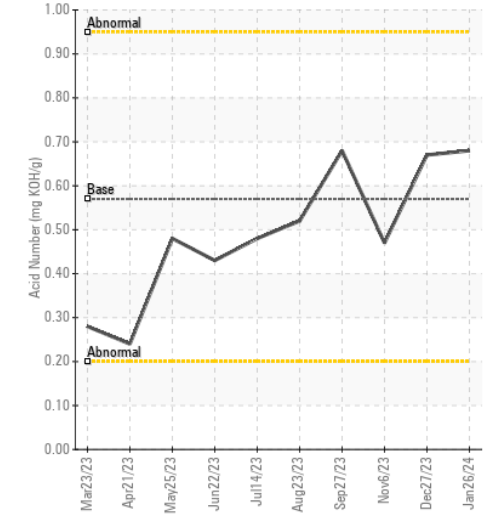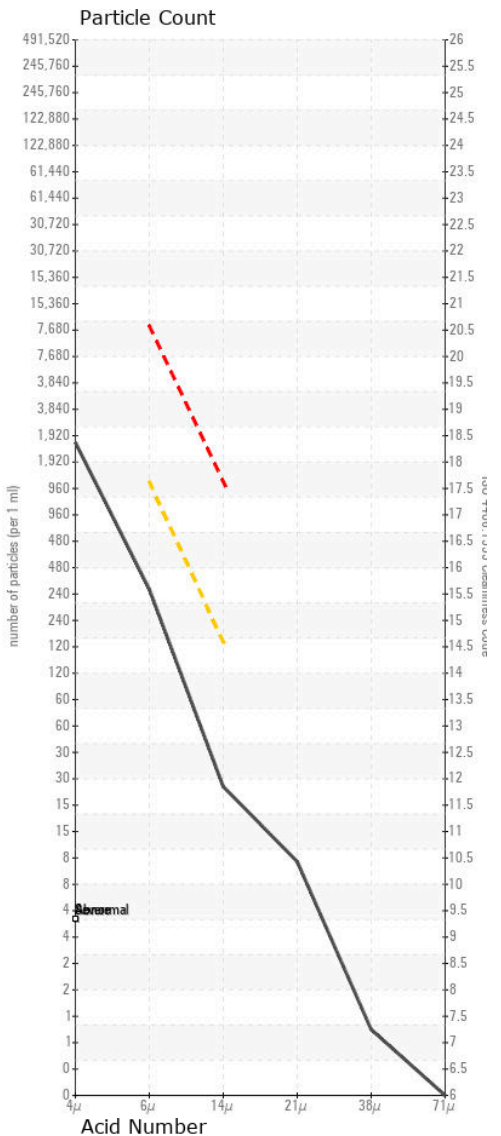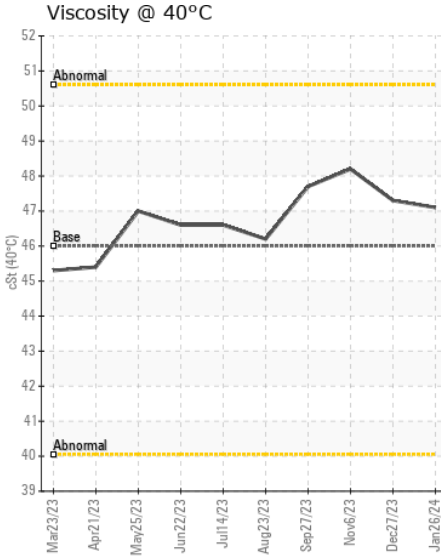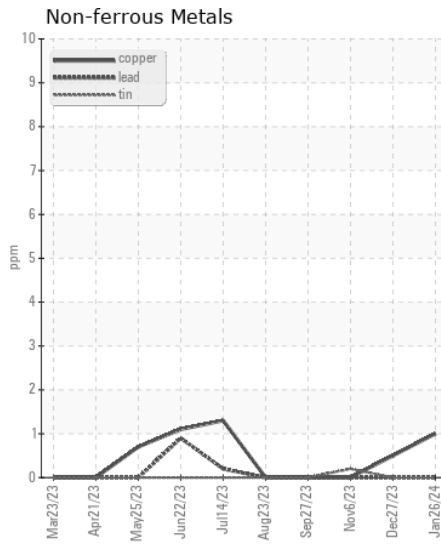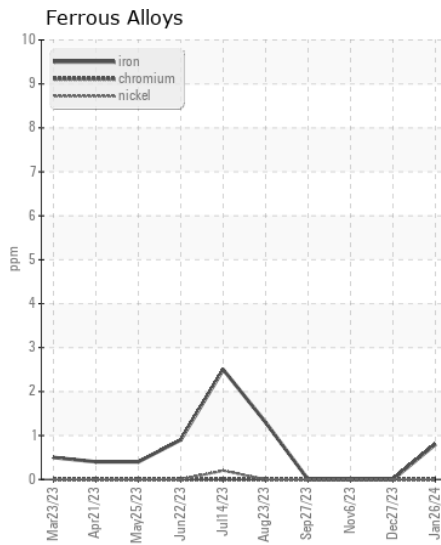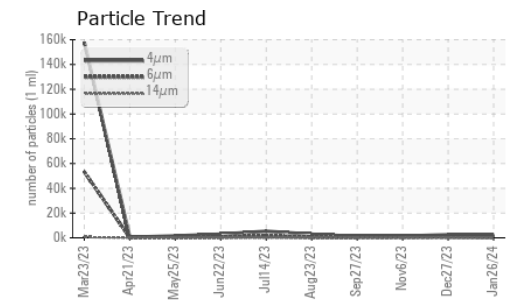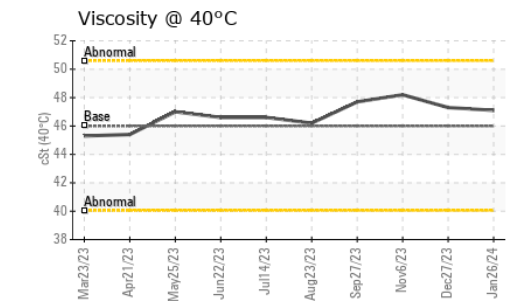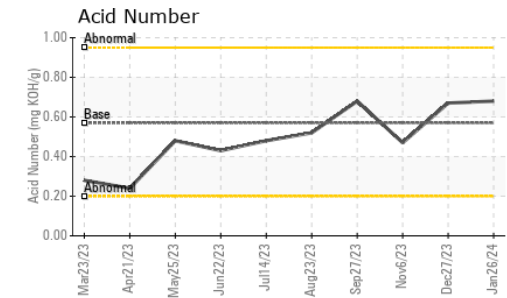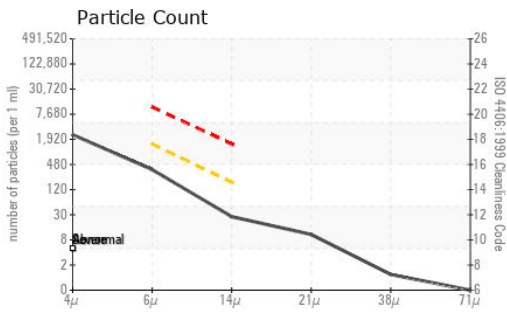

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : KL0014004

Lab Number : 06083062

Unique Number : 10870507

Test Package : MOB 2

Received : 07 Feb 2024

Tested : 08 Feb 2024

Diagnosed : 09 Feb 2024 - Don Baldrige

RAMIREZ & SONS

3404 N ENTERPRISE DR

HOBBS, NM

US 88240

Contact: Rick Davidson

rickdavidson.rs@gmail.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)