



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
BARGE TRANSPORTATION
Machine Id
BARRY GRIFFITH - PME
Component
Port Main Engine
Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KFS0002954	KFS0001263	KFS0002039
Sample Date		Client Info		22 Jan 2024	11 Feb 2023	03 Dec 2022
Machine Age	hrs	Client Info		0	11068	0
Oil Age	hrs	Client Info		500	500	0
Filter Age	hrs	Client Info		500	500	0
Oil Changed		Client Info		Changed	Changed	Not Changd
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<1	3	2
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	2	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	1	0
Lead	ppm	ASTM D5185m	>40	0	1	1
Copper	ppm	ASTM D5185m	>300	3	4	9
Tin	ppm	ASTM D5185m	>10	1	<1	1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	1	2	3
Potassium	ppm	ASTM D5185m	>20	0	1	1
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.5	6.5	6.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	18.4	19.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	0	2
Boron	ppm	ASTM D5185m		0	2	3
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		56	56	55
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		907	843	829
Calcium	ppm	ASTM D5185m		972	1141	1094
Phosphorus	ppm	ASTM D5185m		979	999	973
Zinc	ppm	ASTM D5185m		1152	1185	1169
Sulfur	ppm	ASTM D5185m		2908	3143	3322
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.0	13.9	14.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.8	9.3	9.74
Visc @ 100°C	cSt	ASTM D445	15.6	13.3	13.0	13.4

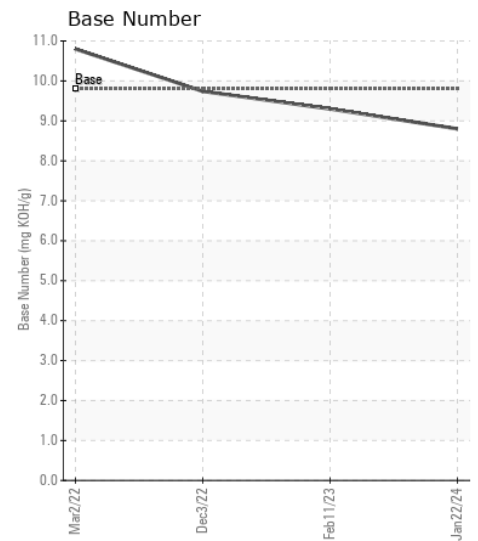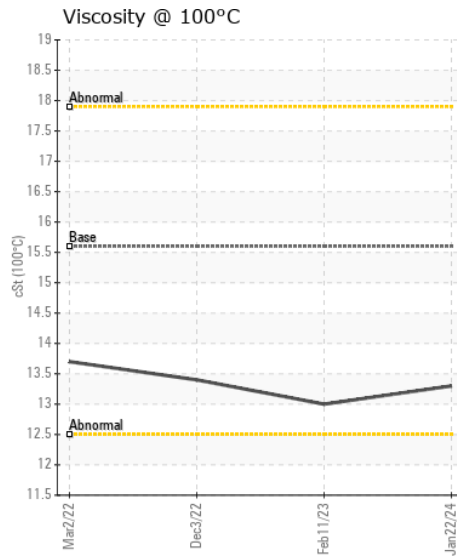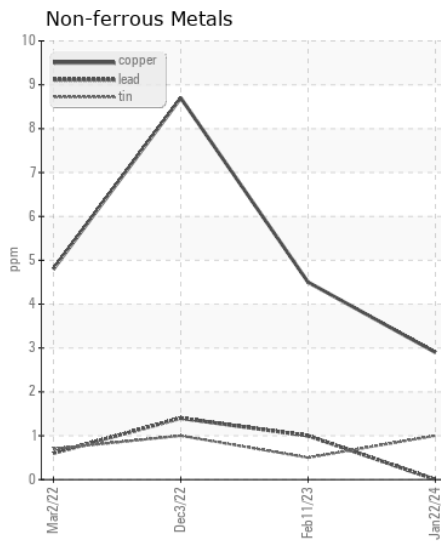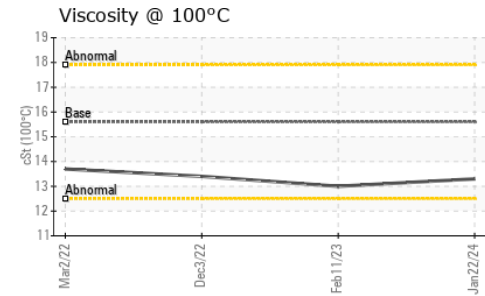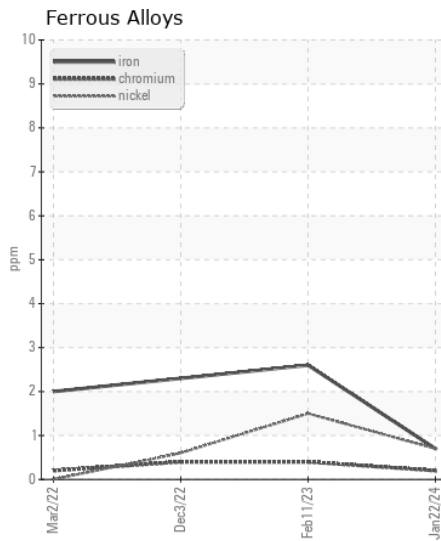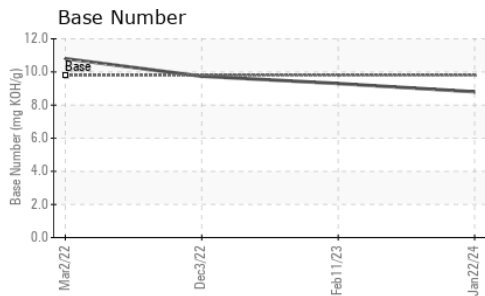

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : KFS0002954

Lab Number : 06083278

Unique Number : 10870723

Test Package : FLEET

Received : 08 Feb 2024

Tested : 08 Feb 2024

Diagnosed : 08 Feb 2024 - Wes Davis

M/V BARRY GRIFFITH

3501 STARLITE DR

PADUCAH, KY

US 42003

Contact: BARRY GRIFFITH

bgriffith@hfline.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)