



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L60H 623294

Component
Diesel Engine

Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP429678	VCP432068	---
Sample Date		Client Info		14 Dec 2023	11 Oct 2023	---
Machine Age	hrs	Client Info		1736	1079	---
Oil Age	hrs	Client Info		0	1079	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	1	39	---
Chromium	ppm	ASTM D5185m	>10	0	3	---
Nickel	ppm	ASTM D5185m	>10	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>10	1	▲ 9	---
Lead	ppm	ASTM D5185m	>20	<1	1	---
Copper	ppm	ASTM D5185m	>15	<1	12	---
Tin	ppm	ASTM D5185m	>10	<1	4	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	7	▲ 26	---
Potassium	ppm	ASTM D5185m	>20	2	<1	---
Fuel		WC Method	>6.0	<1.0	0.6	---
Water		WC Method	>0.1	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	4.7	8.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.6	20.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	5	---
Boron	ppm	ASTM D5185m	2.5	67	19	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.7	38	35	---
Manganese	ppm	ASTM D5185m	0.0	0	4	---
Magnesium	ppm	ASTM D5185m	256	456	551	---
Calcium	ppm	ASTM D5185m	2057	1488	1655	---
Phosphorus	ppm	ASTM D5185m	935	809	935	---
Zinc	ppm	ASTM D5185m	1223	1016	1091	---
Sulfur	ppm	ASTM D5185m	4079	2620	3639	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.9	18.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	11.2	8.4	---
Visc @ 100°C	cSt	ASTM D445	15.0	13.0	▲ 12.0	---

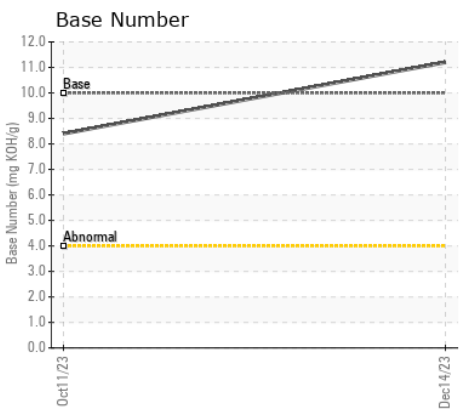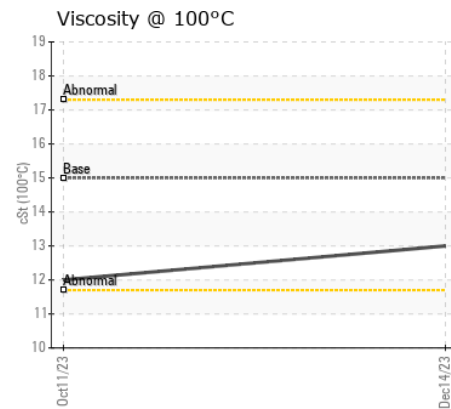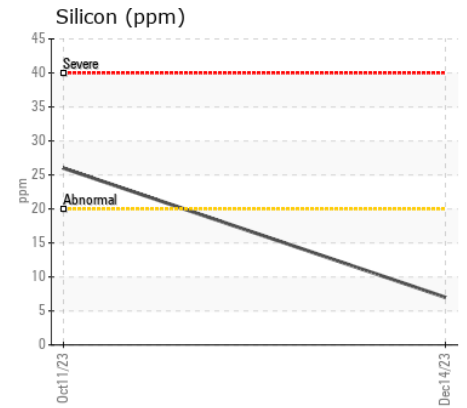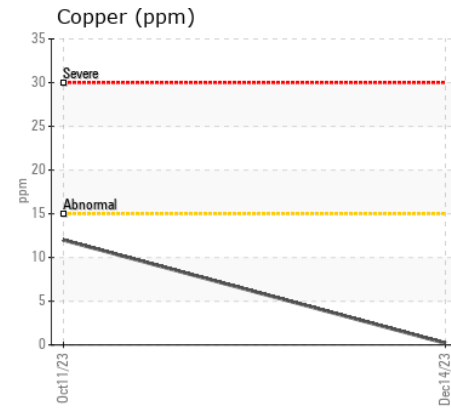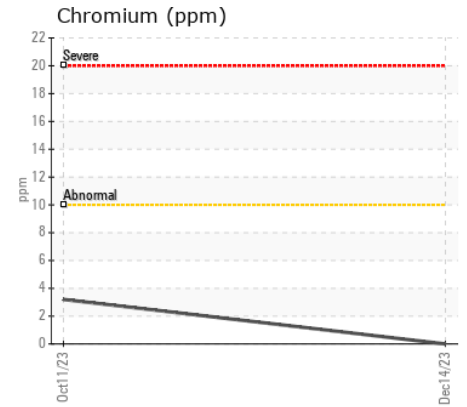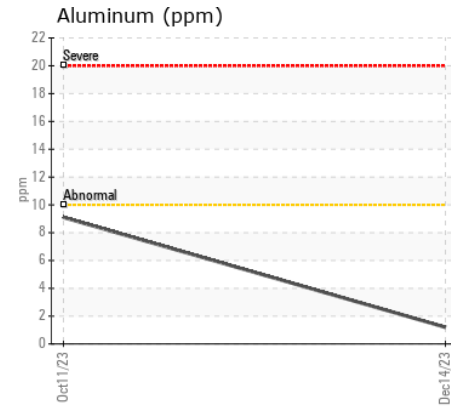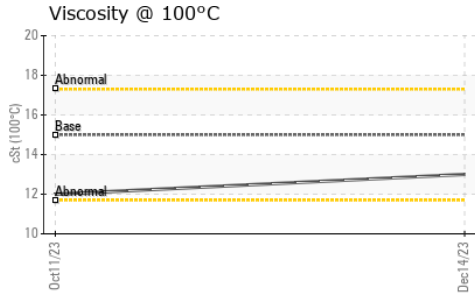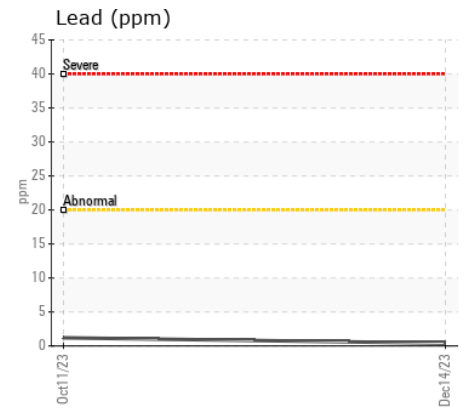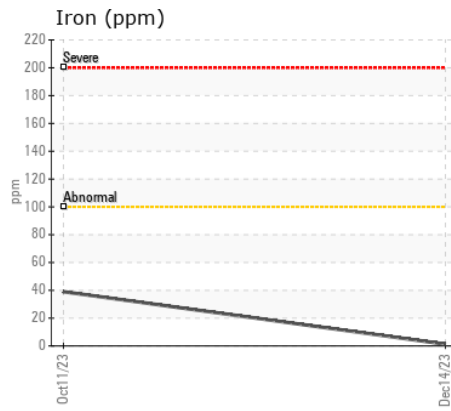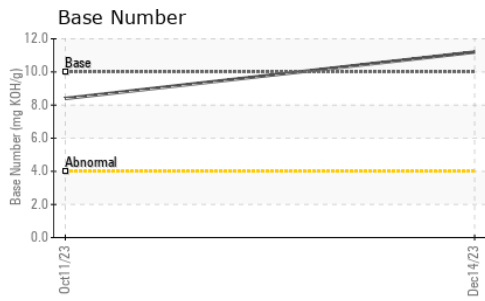

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP429678 **Received** : 08 Feb 2024
Lab Number : 06083332 **Tested** : 08 Feb 2024
Unique Number : 10870777 **Diagnosed** : 08 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

RECYCLE AMERICA

12100 YOUNG PINE RD
ORLANDO, FL
US 32829

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: