



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PACCAR 846-4497
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0017639	RPL0016860	RPL0015830
Sample Date		Client Info		29 Jan 2024	20 Dec 2023	28 Oct 2023
Machine Age	mls	Client Info		115695	113659	109491
Oil Age	mls	Client Info		2139	113659	109491
Filter Age	mls	Client Info		2139	0	0
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Filter Changed		Client Info		Not Changd	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	11	51	46
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	11	8
Lead	ppm	ASTM D5185m	>40	<1	2	2
Copper	ppm	ASTM D5185m	>330	1	7	6
Tin	ppm	ASTM D5185m	>15	<1	2	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	10	11
Potassium	ppm	ASTM D5185m	>20	4	10	8
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.9	0.8
Nitration	Abs/cm	*ASTM D7624	>20	6.1	12.5	11.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.2	26.2	25.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	0	2
Boron	ppm	ASTM D5185m	0	4	19	19
Barium	ppm	ASTM D5185m	0	<1	10	0
Molybdenum	ppm	ASTM D5185m	0	56	40	39
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0	859	500	520
Calcium	ppm	ASTM D5185m		1133	1726	1697
Phosphorus	ppm	ASTM D5185m		953	826	755
Zinc	ppm	ASTM D5185m		1135	935	960
Sulfur	ppm	ASTM D5185m		3194	2613	2627
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.3	27.9	26.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	9.4	5.5	6.2
Visc @ 100°C	cSt	ASTM D445	14	13.4	14.2	14.1

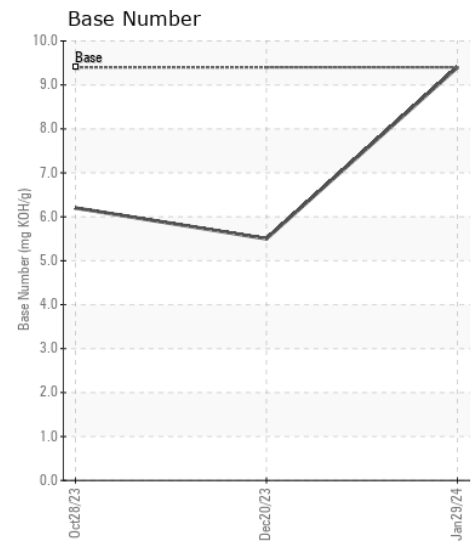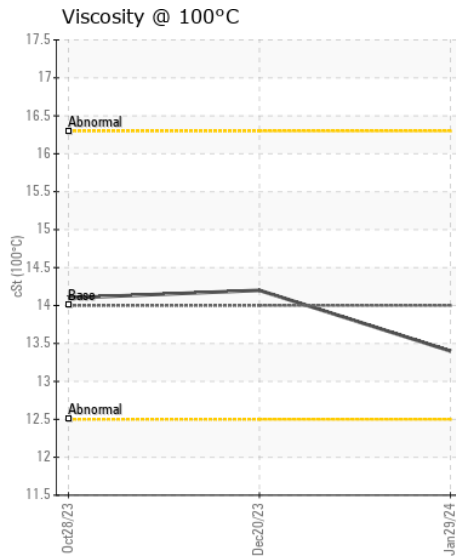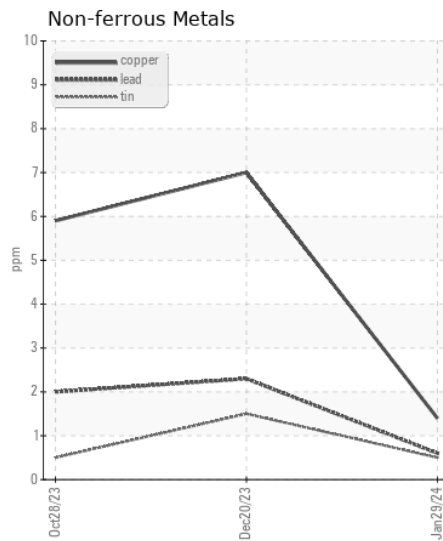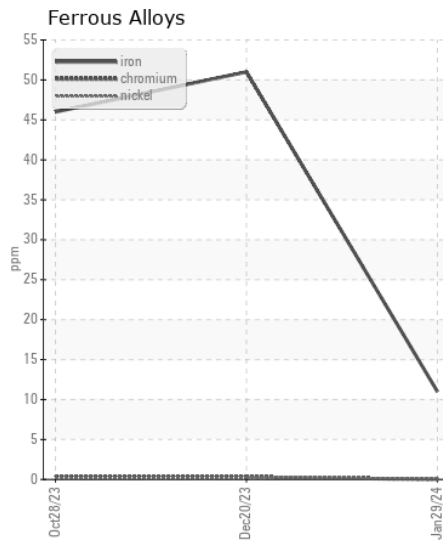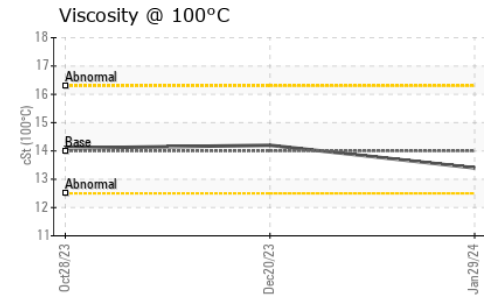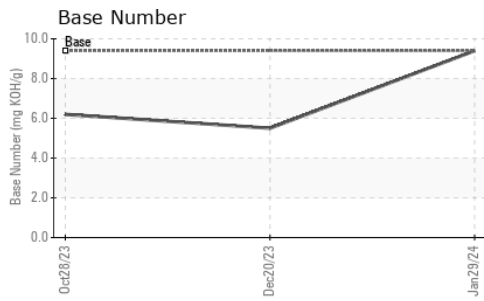

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : RPL0017639
 Lab Number : 06083376
 Unique Number : 10870821
 Test Package : FLEET

Received : 08 Feb 2024
 Tested : 08 Feb 2024
 Diagnosed : 08 Feb 2024 - Wes Davis

RTL PACLEASE - 7006 - Pico Rivera
 7837 Telegraph Rd
 Pico Rivera, CA
 US 90660

Contact: Rudy Trevizo
 TrevizoR@RushEnterprises.Com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: