



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**(YA141297)**  
Machine Id  
**11320**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (9 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0082481</b>	GFL0050775	PCA0061424
Sample Date		Client Info		<b>11 Nov 2023</b>	12 Apr 2023	11 Mar 2022
Machine Age	hrs	Client Info		<b>7613</b>	7613	5984
Oil Age	hrs	Client Info		<b>7613</b>	617	654
Filter Age	hrs	Client Info		<b>7613</b>	617	654
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>27</b>	24	17
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>13</b>	5	11
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	2	1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>2</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>27</b>	3	19
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.2</b>	10.8	10.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.3</b>	19.1	21.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>7</b>	2	7
Boron	ppm	ASTM D5185m	0	<b>0</b>	10	3
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>61</b>	62	62
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>866</b>	948	946
Calcium	ppm	ASTM D5185m	1070	<b>988</b>	1096	1058
Phosphorus	ppm	ASTM D5185m	1150	<b>884</b>	1032	1051
Zinc	ppm	ASTM D5185m	1270	<b>1161</b>	1242	1277
Sulfur	ppm	ASTM D5185m	2060	<b>2752</b>	3749	2753
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.3</b>	18.9	19.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>6.0</b>	6.8	8.1
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	13.4	12.9

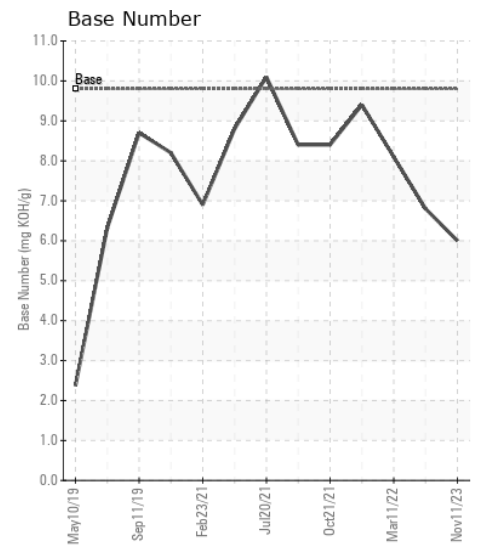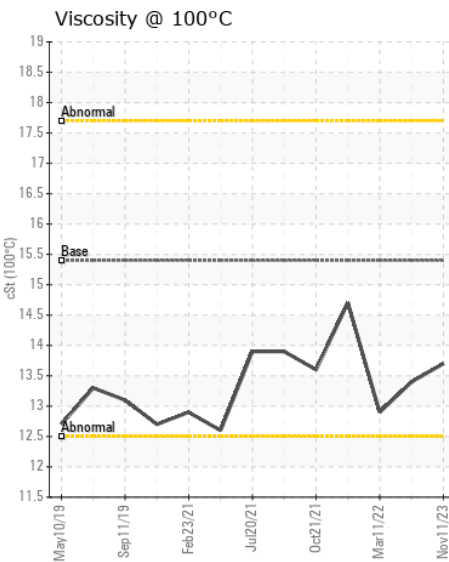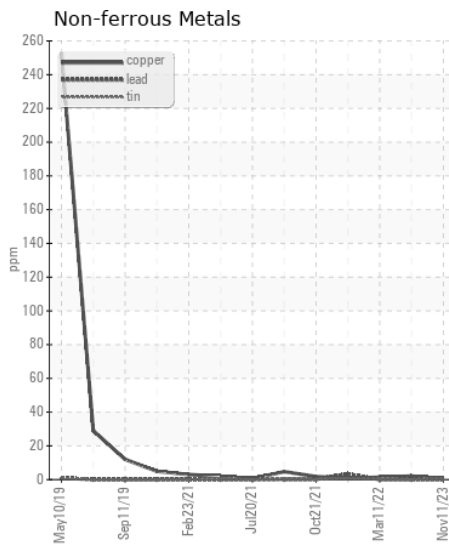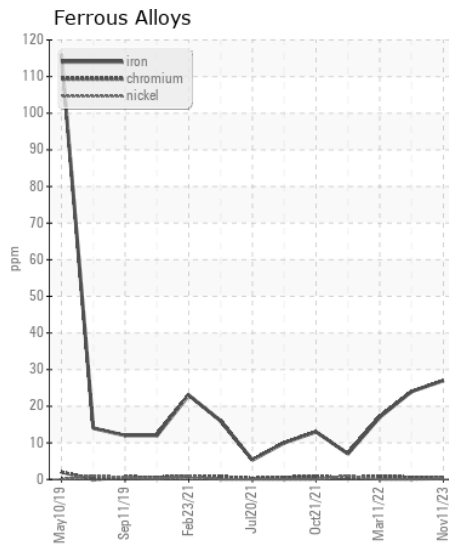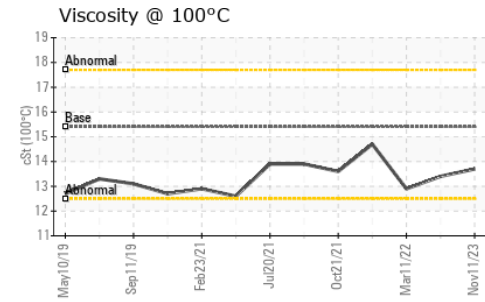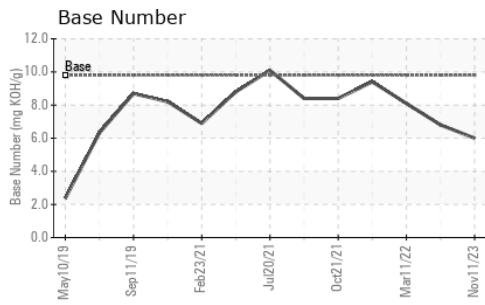

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0082481  
**Lab Number** : 06083463  
**Unique Number** : 10870908  
**Test Package** : FLEET

**Received** : 08 Feb 2024  
**Tested** : 09 Feb 2024  
**Diagnosed** : 09 Feb 2024 - Wes Davis

**GFL Environmental - 007 - Brunswick**  
 2809 Galloway Road  
 Bolivia, NC  
 US 28422  
 Contact: DONALD CRAVEN  
 dcraven@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (910)253-4179