



PERFORMANCE  
UNDER  
PRESSURE

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**CPL**  
Machine Id  
**CPL STRAIGHTENER PLANETARY (S/N 16-4400-0140)**  
Component  
**Gearbox**  
Fluid  
**GEAR OIL ISO 220 (--- QTS)**

**RECOMMENDATION**

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

**WEAR**

All component wear rates are normal.










**CONTAMINATION**

The water content is negligible. There is no indication of any contamination in the oil.

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RP0042116</b>	RP0035009	RP0030659
Sample Date		Client Info		<b>07 Feb 2024</b>	06 Jun 2023	11 Jan 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL
PQ		ASTM D8184		<b>17</b>	17	7
Iron	ppm	ASTM D5185m	>200	<b>33</b>	27	21
Chromium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	0	<1
Lead	ppm	ASTM D5185m	>100	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>200	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185m	>50	<b>2</b>	3	2
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Water	%	ASTM D6304	>0.2	<b>0.005</b>	0.007	0.025
ppm Water	ppm	ASTM D6304	>2000	<b>56</b>	73.5	252.4
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185m		<b>2</b>	<1	0
Boron	ppm	ASTM D5185m	50	<b>2</b>	2	2
Barium	ppm	ASTM D5185m	15	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	15	<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	50	<b>0</b>	3	0
Calcium	ppm	ASTM D5185m	50	<b>9</b>	10	10
Phosphorus	ppm	ASTM D5185m	350	<b>182</b>	206	212
Zinc	ppm	ASTM D5185m	100	<b>14</b>	15	13
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	<b>0.44</b>	0.44	0.44
Visc @ 40°C	cSt	ASTM D445	220	<b>230</b>	230	229

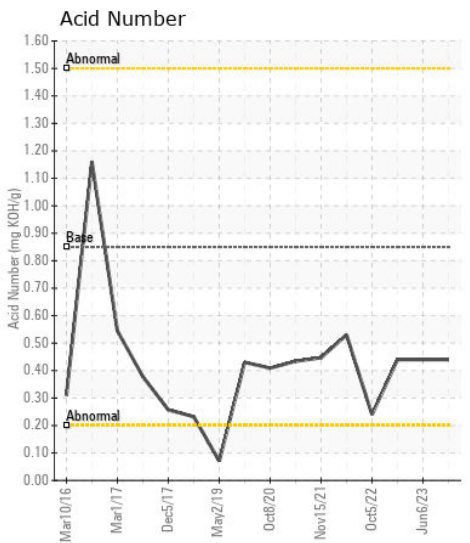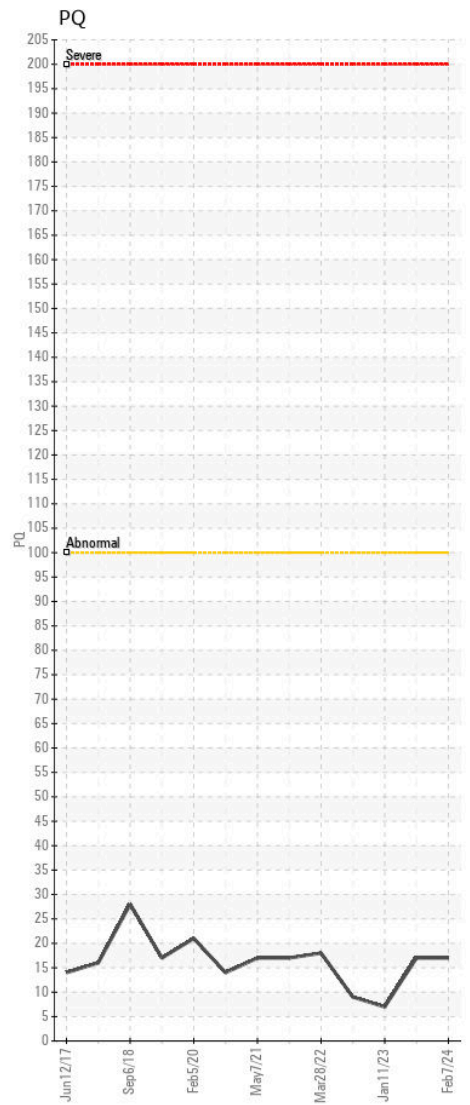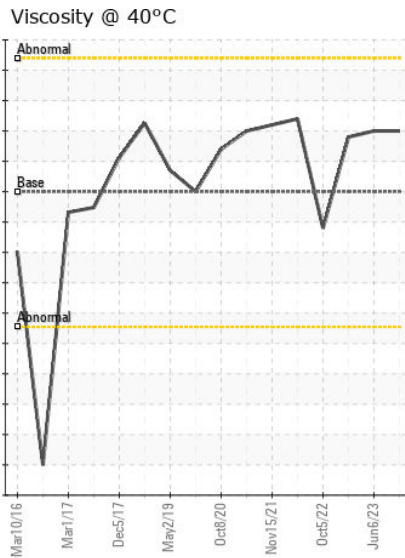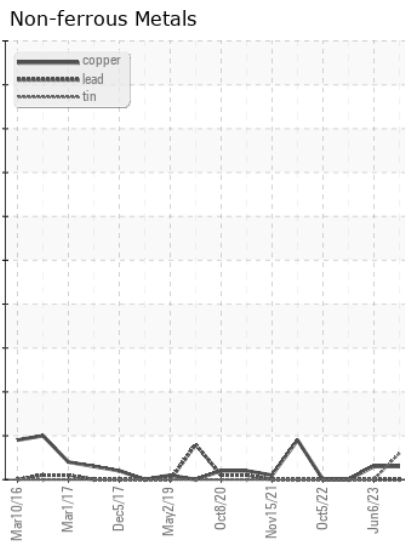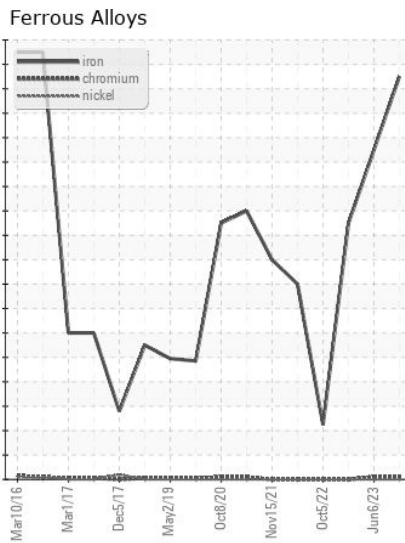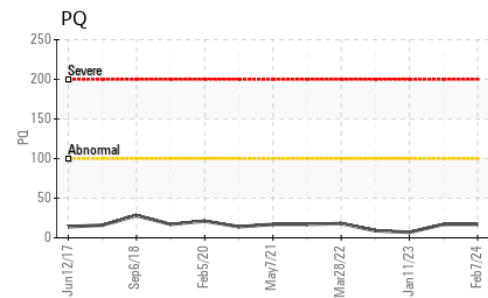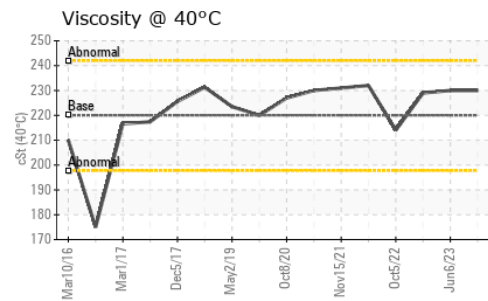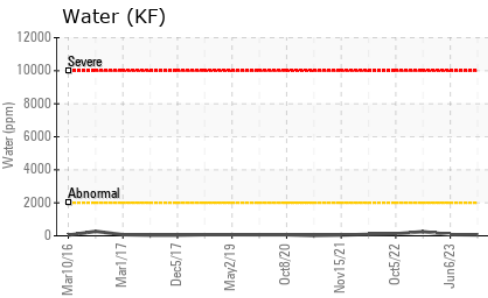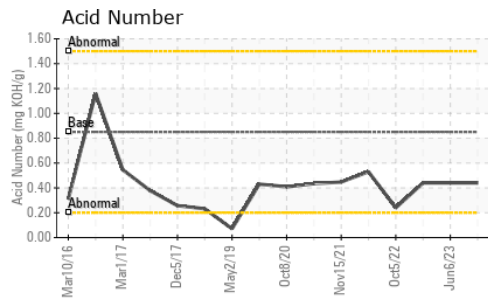

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0042116 **Received** : 08 Feb 2024  
**Lab Number** : 06083670 **Tested** : 09 Feb 2024  
**Unique Number** : 10871115 **Diagnosed** : 09 Feb 2024 - Wes Davis  
**Test Package** : IND 2 ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**OUTOKUMPU STAINLESS USA**  
 HWY 43 N  
 CALVERT, AL  
 US 36513  
 Contact: MARIO JOHNSON  
 Mario.johnson@outokumpu.com  
 T: (251)321-4105  
 F: x: