



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Store 5 - Cross Lanes [RO#147271]**  
Machine Id  
**JOHN DEERE 950K 1T0950KPKHF317786**  
Component  
**Right Inner Final Drive**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (4 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0047457</b>	LEC0045339	LEC0042587
Sample Date		Client Info		<b>05 Feb 2024</b>	27 Oct 2023	07 Aug 2023
Machine Age	hrs	Client Info		<b>4873</b>	4273	3563
Oil Age	hrs	Client Info		<b>600</b>	710	1330
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>27</b>	37	41
Iron	ppm	ASTM D5185m	>750	<b>27</b>	49	53
Chromium	ppm	ASTM D5185m	>9	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>1</b>	<1	<1
Lead	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>5</b>	6	6
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	2
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>0</b>	<1	0
Boron	ppm	ASTM D5185m	6	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	145	<b>100</b>	89	94
Calcium	ppm	ASTM D5185m	3570	<b>3584</b>	3239	3468
Phosphorus	ppm	ASTM D5185m	1290	<b>922</b>	962	1007
Zinc	ppm	ASTM D5185m	1640	<b>1283</b>	1153	1231
Sulfur	ppm	ASTM D5185m		<b>3675</b>	3290	3848
Visc @ 40°C	cSt	ASTM D445	57.0	<b>52.1</b>	50.2	49.5

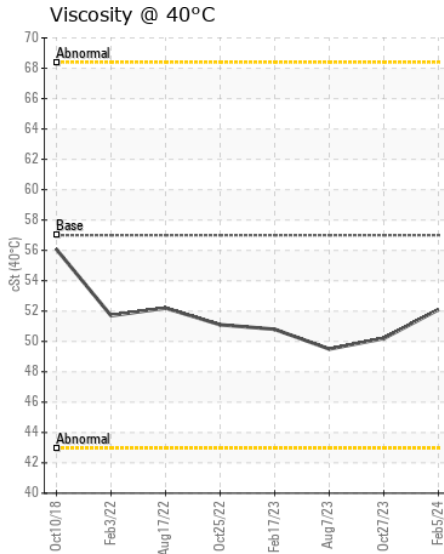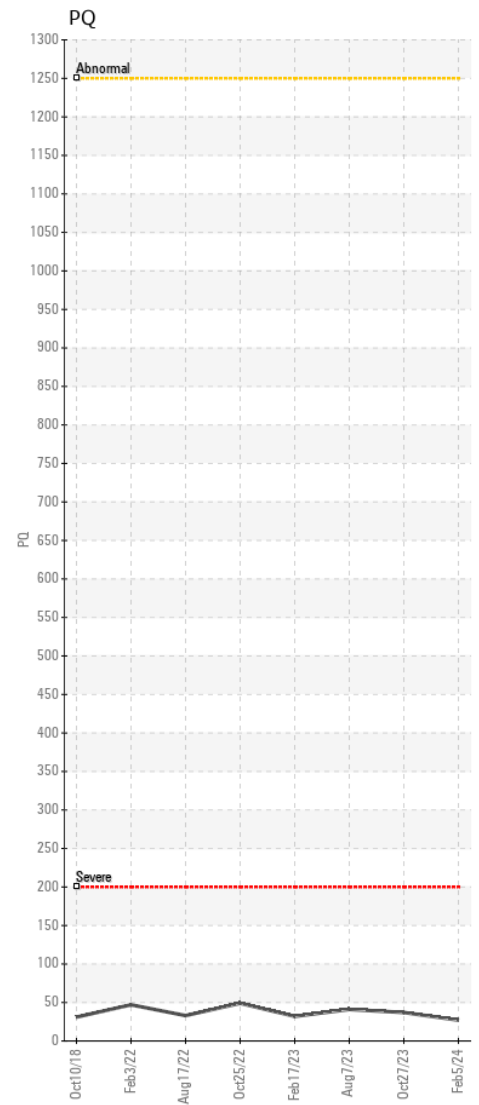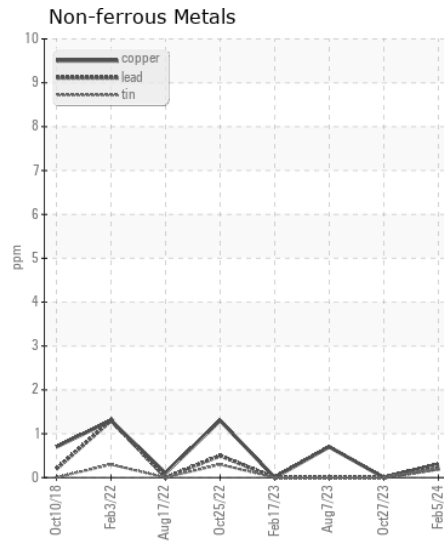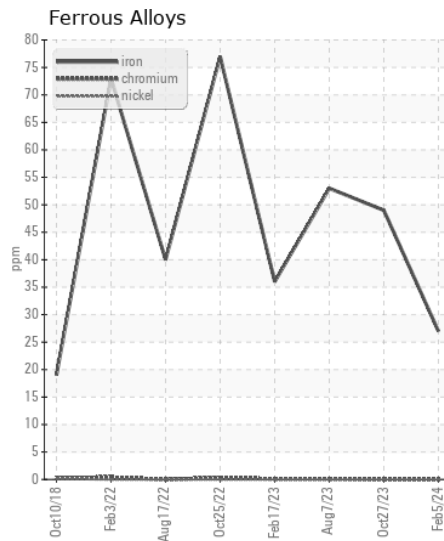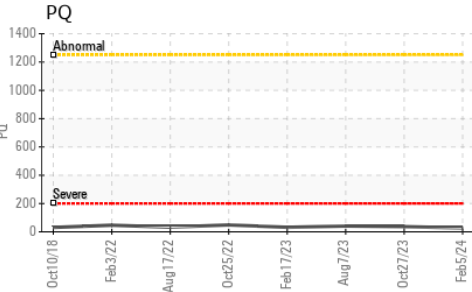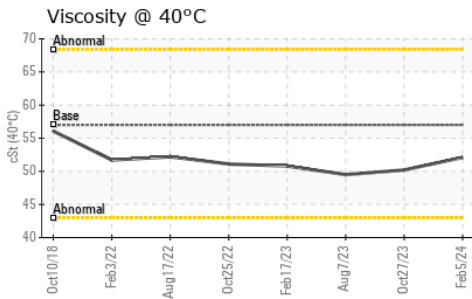

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0047457 **Received** : 08 Feb 2024  
**Lab Number** : 06083848 **Tested** : 09 Feb 2024  
**Unique Number** : 10871293 **Diagnosed** : 09 Feb 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**APEX PIPELINE**  
P.O. BOX 580  
NITRO, WV  
US 25143  
Contact: KELLY TUCKER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (304)204-0080

F: (304)204-0083