



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W8474]
 Machine Id
JOHN DEERE 724L 1DW724LZELL705783
 Component
Rear Differential
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (6 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W8474)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0197147	---	---
Sample Date		Client Info		07 Feb 2024	---	---
Machine Age	hrs	Client Info		4232	---	---
Oil Age	hrs	Client Info		4232	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		12	---	---
Iron	ppm	ASTM D5185m	>500	26	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	1	---	---
Lead	ppm	ASTM D5185m	>25	23	---	---
Copper	ppm	ASTM D5185m	>100	6	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	4	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	6	<1	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m	145	95	---	---
Calcium	ppm	ASTM D5185m	3570	3468	---	---
Phosphorus	ppm	ASTM D5185m	1290	1114	---	---
Zinc	ppm	ASTM D5185m	1640	1289	---	---
Sulfur	ppm	ASTM D5185m		4028	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	51.6	---	---

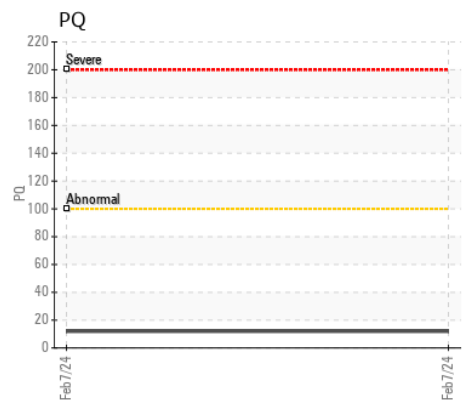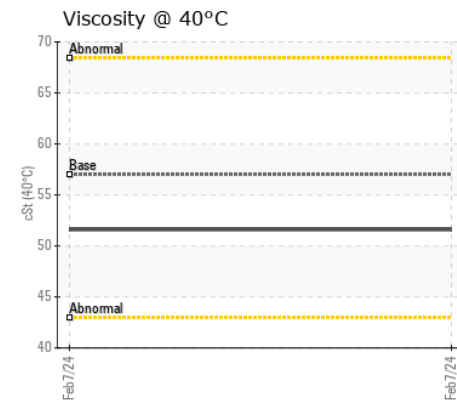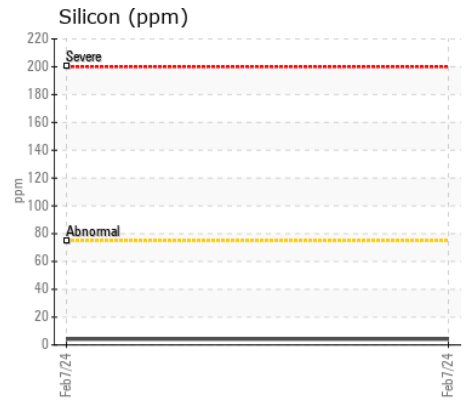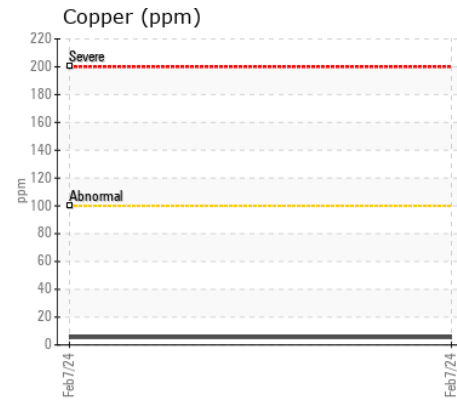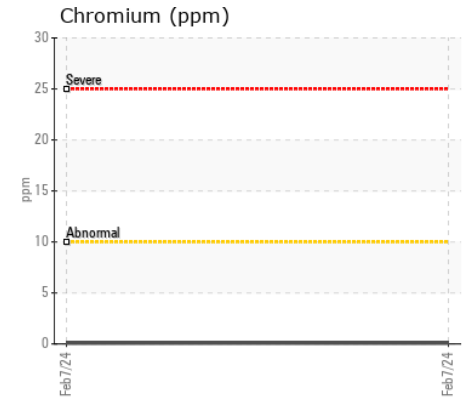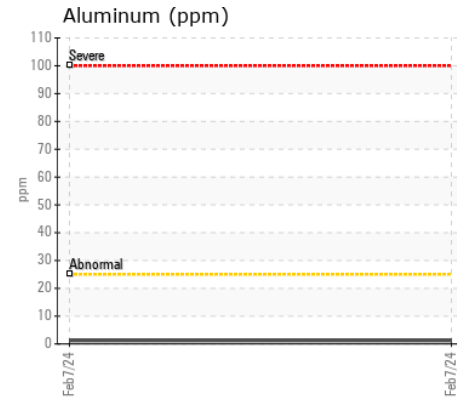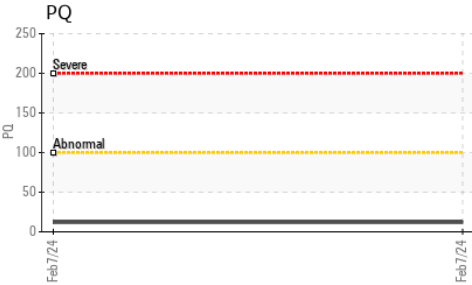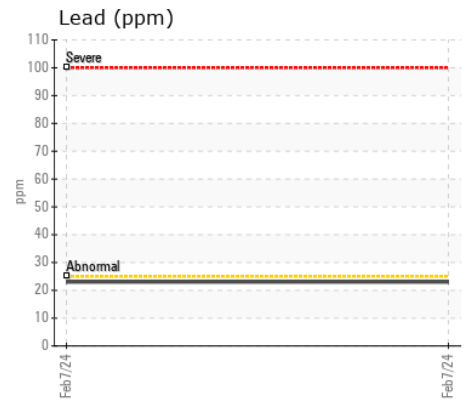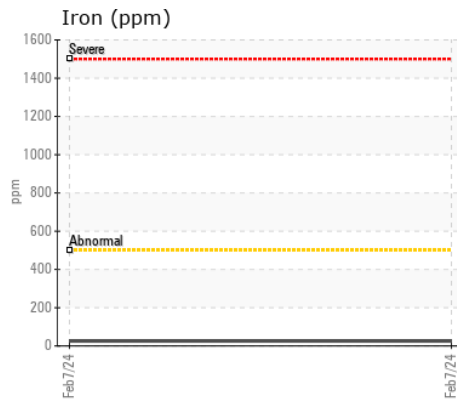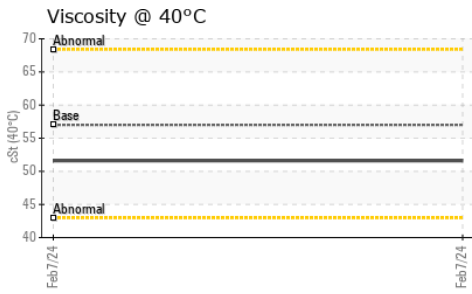

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0197147

Lab Number : 06083889

Unique Number : 10871334

Test Package : MOBCE (Additional Tests: PQ)

Received : 08 Feb 2024

Tested : 09 Feb 2024

Diagnosed : 11 Feb 2024 - Don Baldrige

JRE - GARNER

4161 AUBURN CHURCH RD

GARNER, NC

US 27529

Contact: RALEIGH SHOP

sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

T: (919)614-2260

F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)