



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
BELL B30E B93A631EL03410914
Component
Rear Differential
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		BE0024620	---	---
Sample Date		Client Info		30 Jan 2024	---	---
Machine Age	hrs	Client Info		81	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

PQ		ASTM D8184	>3000	98	---	---
Iron	ppm	ASTM D5185m	>HR:1=	197	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	4	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>100	76	---	---
Tin	ppm	ASTM D5185m	>10	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>201	19	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>1.01	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>1.01	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	10	---	---
Boron	ppm	ASTM D5185m	400	19	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	0	---	---
Manganese	ppm	ASTM D5185m		7	---	---
Magnesium	ppm	ASTM D5185m	12	3	---	---
Calcium	ppm	ASTM D5185m	150	104	---	---
Phosphorus	ppm	ASTM D5185m	1650	2319	---	---
Zinc	ppm	ASTM D5185m	125	1733	---	---
Sulfur	ppm	ASTM D5185m	22500	39743	---	---
Visc @ 40°C	cSt	ASTM D445	143	216	---	---

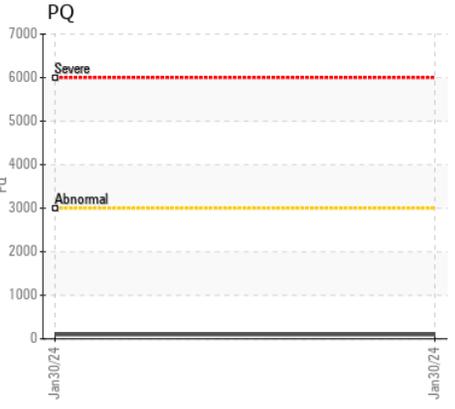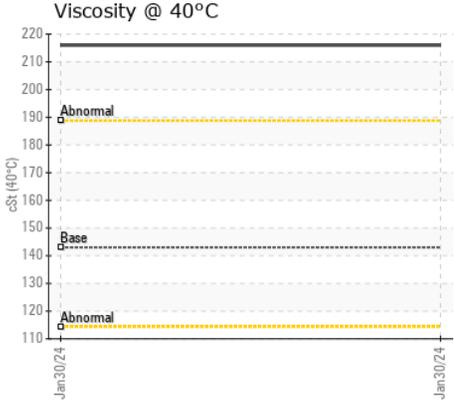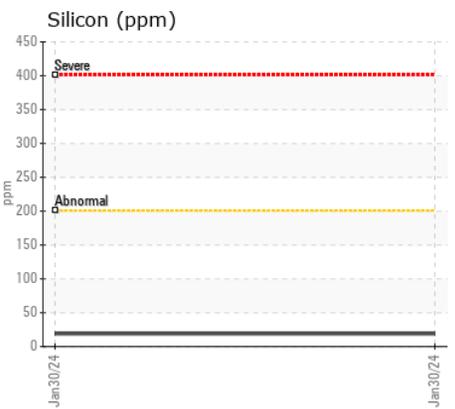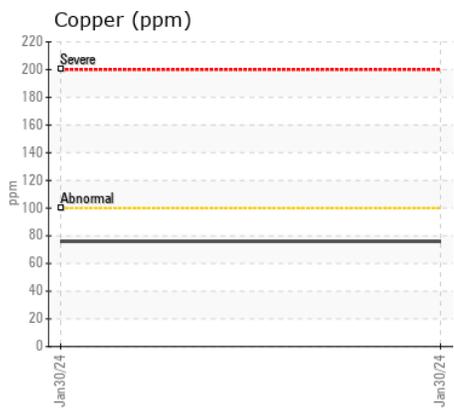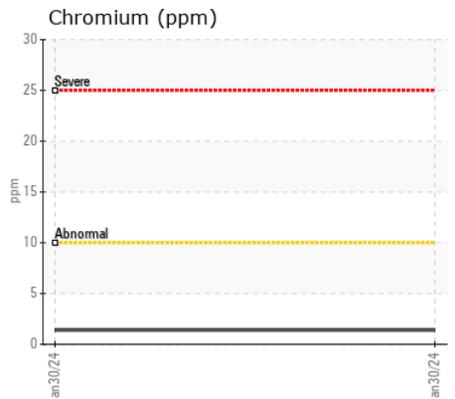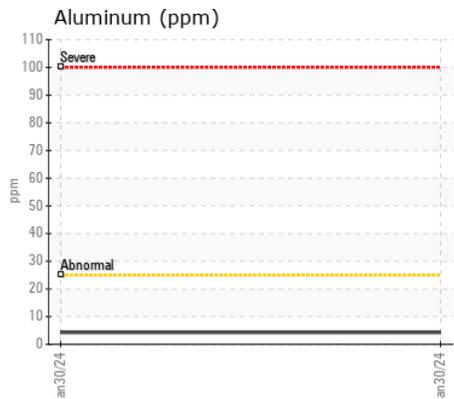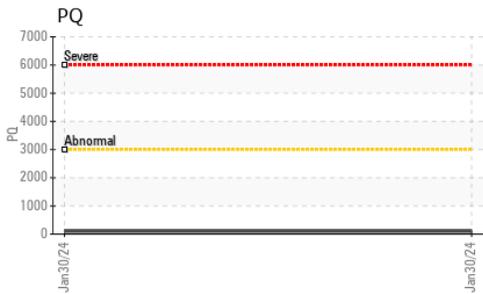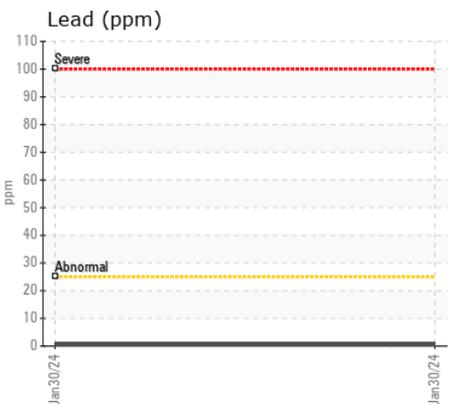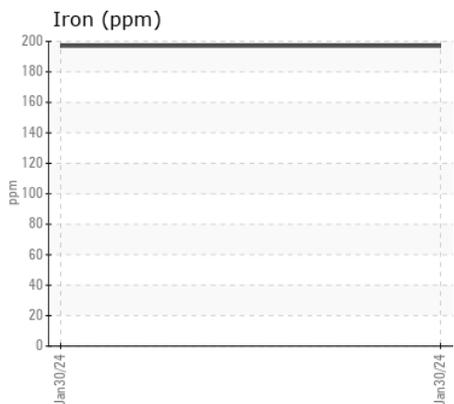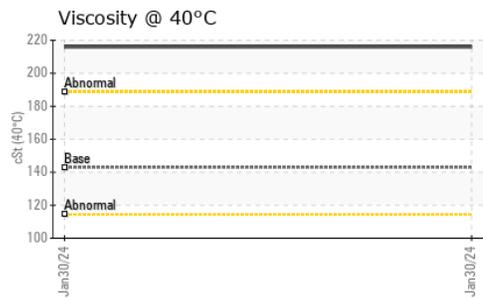

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : BE0024620
Lab Number : 06083907
Unique Number : 10871352
Test Package : MOBCE

Received : 08 Feb 2024
Tested : 09 Feb 2024
Diagnosed : 11 Feb 2024 - Don Baldrige

National Equipment Dealers LLC NE
 215 Woodside Drive
 Lexington, NC
 US 27292
 Contact: Steven Gawthrop
 sgawthrop@nedealers.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)