

Machine Id CR1229 Component 6 Winch Fluid GEAR OIL ISO 220 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION


There is no indication of any contamination in the oil.

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0809537		
Sample Date		Client Info		05 Feb 2024		
Machine Age	hrs	Client Info		3049		
Oil Age	hrs	Client Info		0		
Filter Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Filter Changed		Client Info		Changed		
Sample Status				NORMAL		
Iron		ASTM D5185m	>150	0		
Chromium	ppm	ASTM D5185m		0		
	ppm	ASTM D5185m	>10	<1		
Nickel Titanium	ppm	ASTM D5185m	>10	<1 0		
Silver	ppm	ASTM D5185m		0		
	ppm		. 5	-		
Aluminum Lead	ppm	ASTM D5185m	>5 >15	<1 0		
	ppm			•		
Copper	ppm	ASTM D5185m	>80	0		
Tin	ppm	ASTM D5185m		<1		
Vanadium	ppm	ASTM D5185m	NONE	0		
White Metal	scalar	*Visual		NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Silicon	ppm	ASTM D5185m	>25	0		
Potassium	ppm	ASTM D5185m	>20	3		
Water		WC Method	>0.2	NEG		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.2	NEG		
				_		
Sodium	ppm	ASTM D5185m	50	5		
Boron	ppm	ASTM D5185m	50	0		
Barium	ppm	ASTM D5185m	15	1		
Molybdenum	ppm	ASTM D5185m	15	0		
Manganese	ppm	ASTM D5185m	50	<1		
Magnesium	ppm	ASTM D5185m	50	0		
Calcium	ppm	ASTM D5185m	50	4		
Phosphorus	ppm	ASTM D5185m	350	51		
Zinc	ppm	ASTM D5185m	100	29		
Sulfur	ppm	ASTM D5185m	12500	2069		
Visc @ 40°C	cSt	ASTM D445	220	243		

Contact/Location: MICHAEL LAWSON - BUCGRA

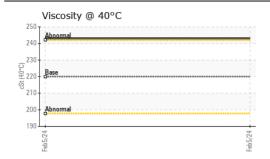

Ferrous Alloys 10 mdd 0 Non-ferrous Metals 10 lead maa Viscosity @ 40°C 24 240 235 230 22! C20 (40°C) 21 210 205 200 Abnorma 195 Feb5/24. Feb5/24

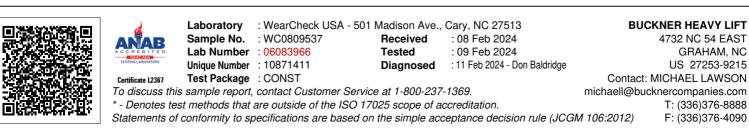

Contact/Location: MICHAEL LAWSON - BUCGRA

Page 2 of 2