



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**CR1229 - OUTER**  
Component  
**Rear Left Planetary**  
Fluid  
**GEAR OIL ISO 220 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0873223</b>	WC0810525	---
Sample Date		Client Info		<b>05 Feb 2024</b>	12 May 2023	---
Machine Age	hrs	Client Info		<b>3049</b>	2563	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>7</b>	53	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	2	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	<1	---
Lead	ppm	ASTM D5185m	>25	<b>0</b>	1	---
Copper	ppm	ASTM D5185m	>75	<b>0</b>	11	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>0</b>	1	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	5	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>MODER</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	2	---
Boron	ppm	ASTM D5185m	50	<b>0</b>	0	---
Barium	ppm	ASTM D5185m	15	<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m	15	<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m	50	<b>0</b>	<1	---
Calcium	ppm	ASTM D5185m	50	<b>0</b>	16	---
Phosphorus	ppm	ASTM D5185m	350	<b>289</b>	15	---
Zinc	ppm	ASTM D5185m	100	<b>3</b>	16	---
Sulfur	ppm	ASTM D5185m	12500	<b>4128</b>	2970	---
Visc @ 40°C	cSt	ASTM D445	220	<b>231</b>	234	---

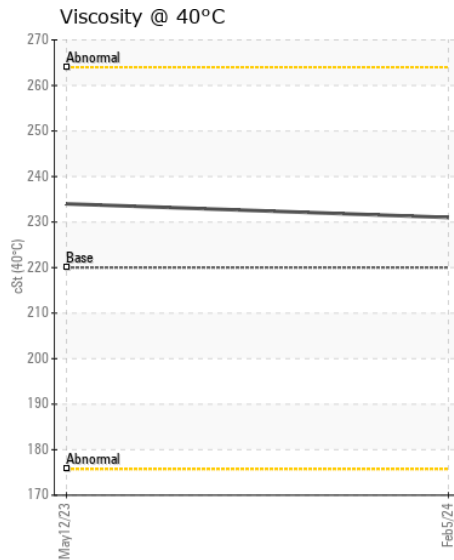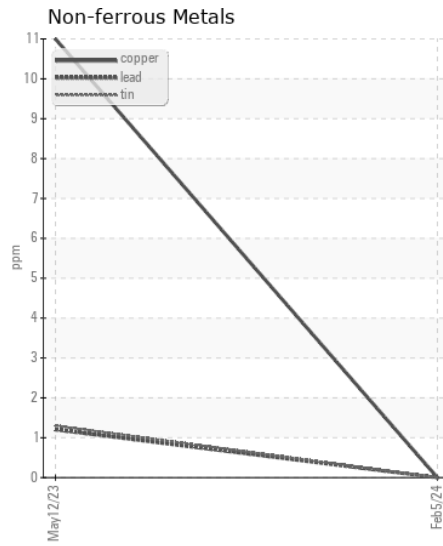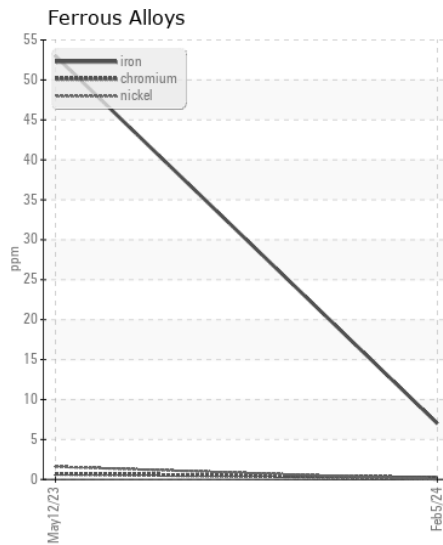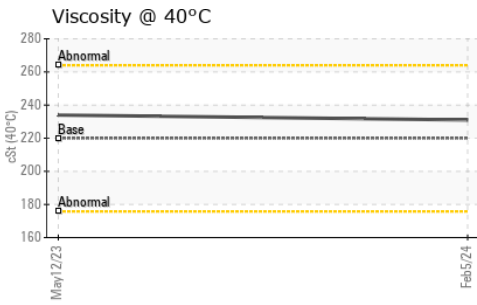

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : WC0873223

**Lab Number** : 06083989

**Unique Number** : 10871434

**Test Package** : CONST

**Received** : 08 Feb 2024

**Tested** : 09 Feb 2024

**Diagnosed** : 11 Feb 2024 - Don Baldrige

**BUCKNER HEAVY LIFT**

4732 NC 54 EAST

GRAHAM, NC

US 27253-9215

Contact: MICHAEL LAWSON

michaell@bucknercompanies.com

T: (336)376-8888

F: (336)376-4090

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)