



VOLVO

OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Area
[LKQ]
Machine Id
VOLVO L110H 632741
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | VCP454184 | --- | --- |
| Sample Date | | Client Info | | 25 Jan 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 541 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | Not Changed | --- | --- |
| Filter Changed | | Client Info | | Not Changed | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|-----|-----|
| Iron | ppm | ASTM D5185m | >160 | 26 | --- | --- |
| Chromium | ppm | ASTM D5185m | >5 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >5 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | >5 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >50 | 2 | --- | --- |
| Lead | ppm | ASTM D5185m | >50 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m | >225 | 4 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION










There is no indication of any contamination in the fluid.

| | | | | | | |
|------------------|--------|-------------|-------|--------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >20 | 7 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 0 | --- | --- |
| Water | | WC Method | >0.1 | NEG | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | --- | --- |

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|------|-------------|-----|-----|
| Sodium | ppm | ASTM D5185m | | 3 | --- | --- |
| Boron | ppm | ASTM D5185m | | 80 | --- | --- |
| Barium | ppm | ASTM D5185m | | 5 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 5 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 0 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 69 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 197 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 13 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 1735 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | 35.0 | 30.8 | --- | --- |

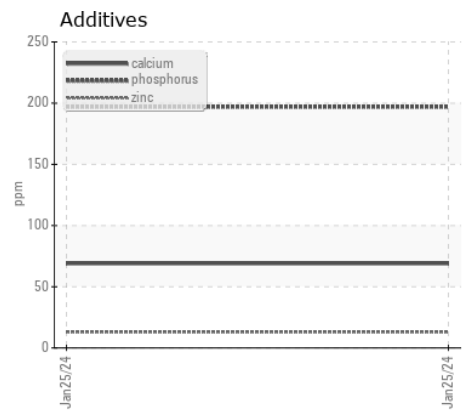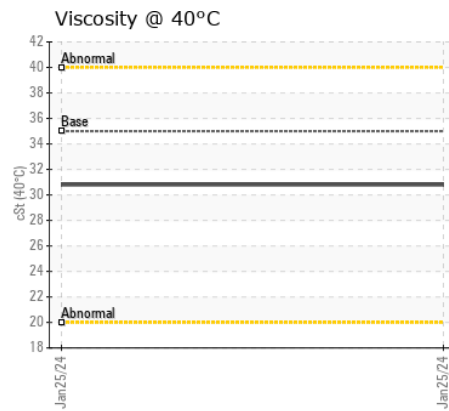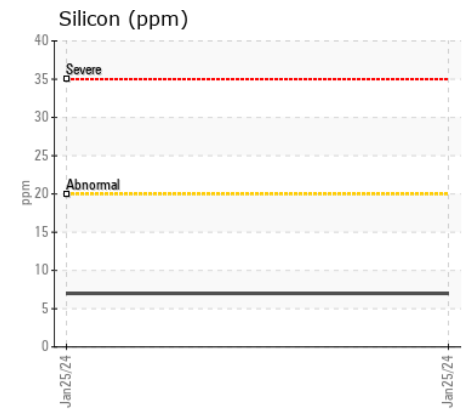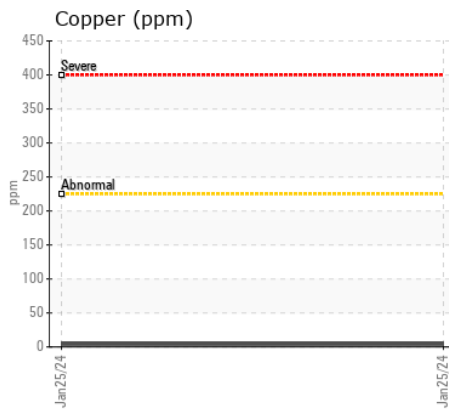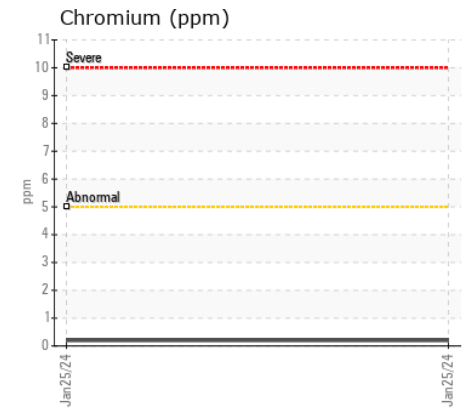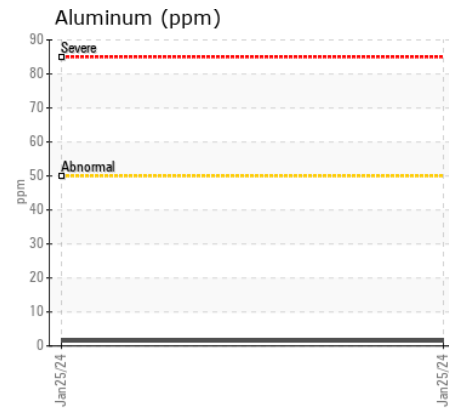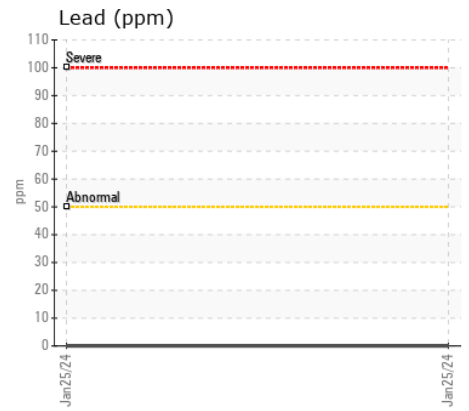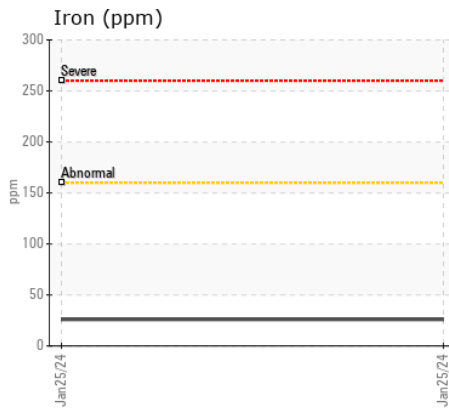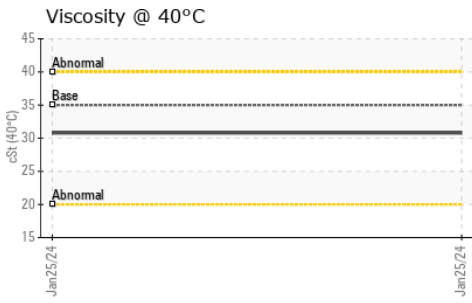

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP454184
Lab Number : 06084021
Unique Number : 10871466
Test Package : MOB 1

Received : 08 Feb 2024
Tested : 11 Feb 2024
Diagnosed : 11 Feb 2024 - Don Baldrige

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: KENNY HANEY
 khaney@flaglerce.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)