



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH 3006
Component
Diesel Engine
Fluid
CHEVRON DELO 400 XLE 10W30 (40 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0663220	WC0863307	WC0816625
Sample Date		Client Info		31 Jan 2024	06 Dec 2023	26 Aug 2023
Machine Age	mls	Client Info		392803	382295	360501
Oil Age	mls	Client Info		22314	370488	39777
Filter Age	mls	Client Info		22314	11807	39777
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Filter Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	10	6	18
Chromium	ppm	ASTM D5185m	>20	0	0	<1
Nickel	ppm	ASTM D5185m	>4	0	1	2
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	4	4	8
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	2	2	5
Tin	ppm	ASTM D5185m	>15	1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	6	10
Potassium	ppm	ASTM D5185m	>20	4	6	4
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.2	0.5
Nitration	Abs/cm	*ASTM D7624	>20	9.9	9.4	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.8	19.7	24.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	4
Boron	ppm	ASTM D5185m		28	56	26
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		732	761	801
Calcium	ppm	ASTM D5185m	2900	1314	1311	1408
Phosphorus	ppm	ASTM D5185m	1100	716	755	726
Zinc	ppm	ASTM D5185m	1200	820	838	847
Sulfur	ppm	ASTM D5185m	4000	2902	3033	3461
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.7	14.4	19.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.3	5.9	7.4	5.1
Visc @ 100°C	cSt	ASTM D445	11.9	11.4	11.4	11.7

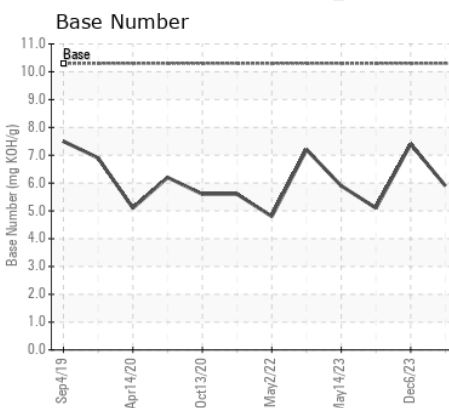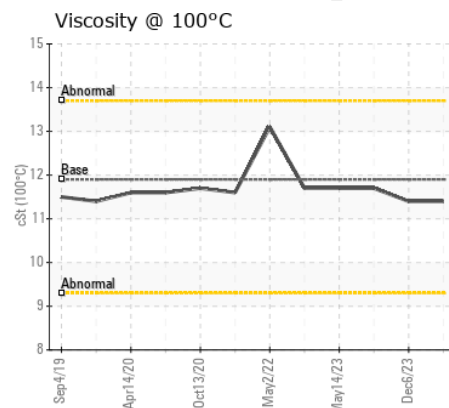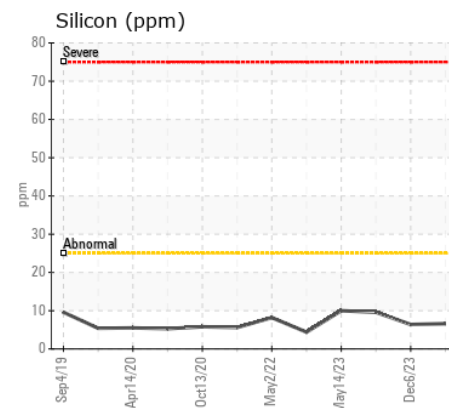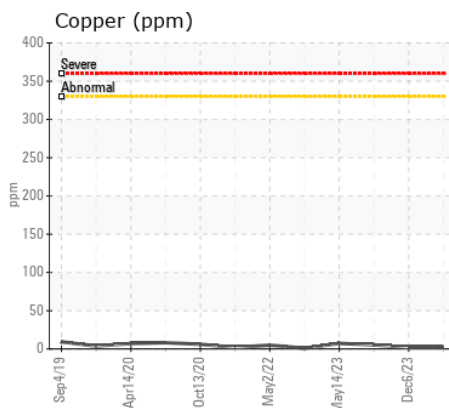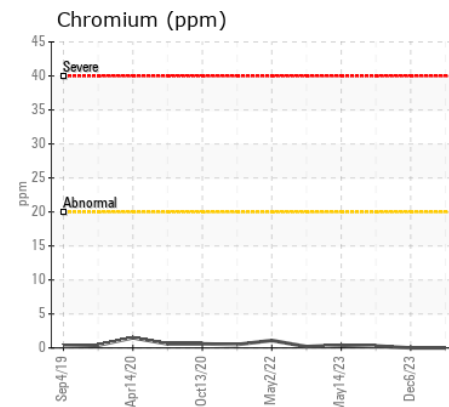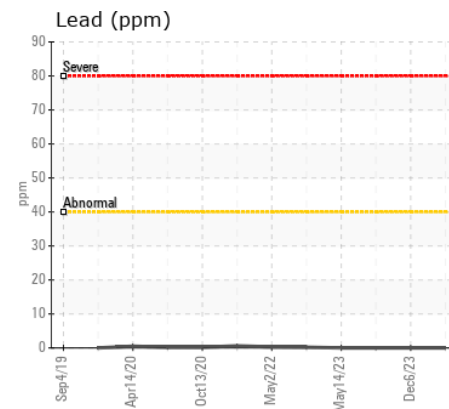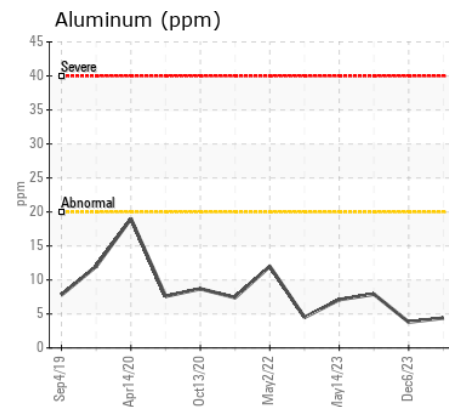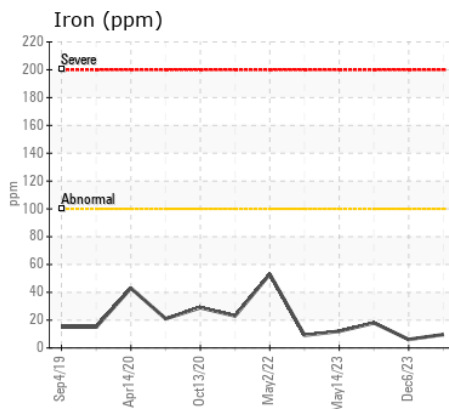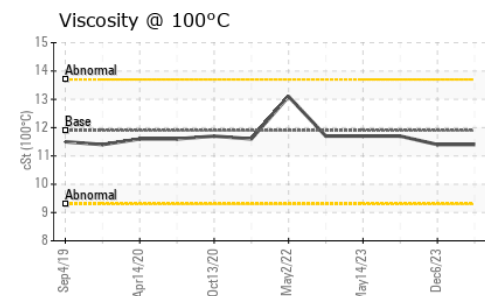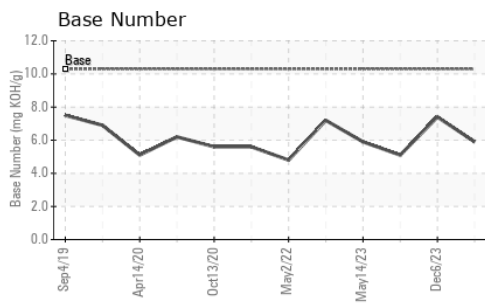

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0663220 **Received** : 08 Feb 2024
Lab Number : 06084202 **Tested** : 09 Feb 2024
Unique Number : 10871647 **Diagnosed** : 09 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

LTI/MILKY WAY - SUNNYSIDE
 333 MIDVALE RD
 SUNNYSIDE, WA
 US 98944
 Contact: JERRY CRISP
 jcrisp@ltii.lynden.com
 T: (509)839-5844
 F: (509)839-6556

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)