



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**927070-260334**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0103975</b>	GFL0065216	GFL0065175
Sample Date		Client Info		<b>03 Feb 2024</b>	18 Jan 2023	29 Nov 2022
Machine Age	hrs	Client Info		<b>20468</b>	197016	191964
Oil Age	hrs	Client Info		<b>0</b>	5052	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Changed	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>16</b>	10	15
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	9	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	4	9
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>1.2</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.6</b>	6.7	6.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.3</b>	18.7	19.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>5</b>	24	<1
Boron	ppm	ASTM D5185m	0	<b>5</b>	0	76
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m	60	<b>59</b>	59	40
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>945</b>	899	489
Calcium	ppm	ASTM D5185m	1070	<b>1111</b>	1052	2132
Phosphorus	ppm	ASTM D5185m	1150	<b>1061</b>	988	1056
Zinc	ppm	ASTM D5185m	1270	<b>1272</b>	1181	1318
Sulfur	ppm	ASTM D5185m	2060	<b>3121</b>	2984	4424
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.4</b>	14.4	14.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.1</b>	9.2	11.0
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	14.2	14.7

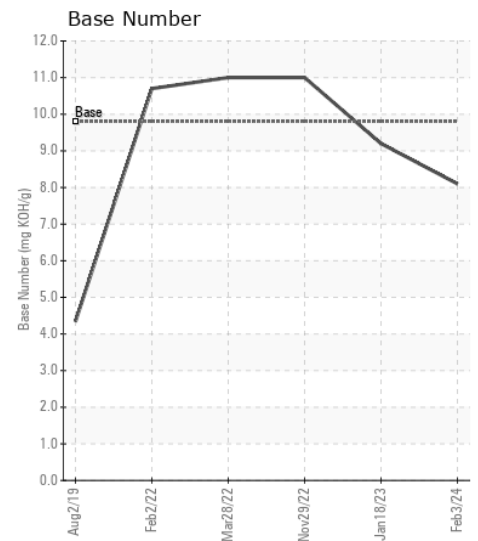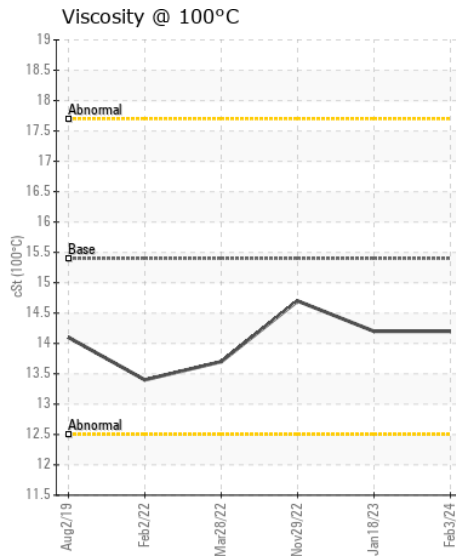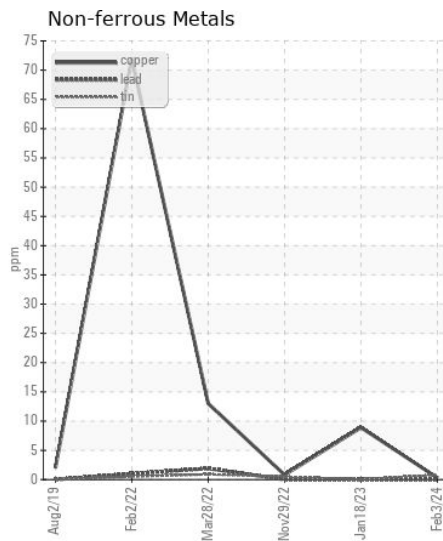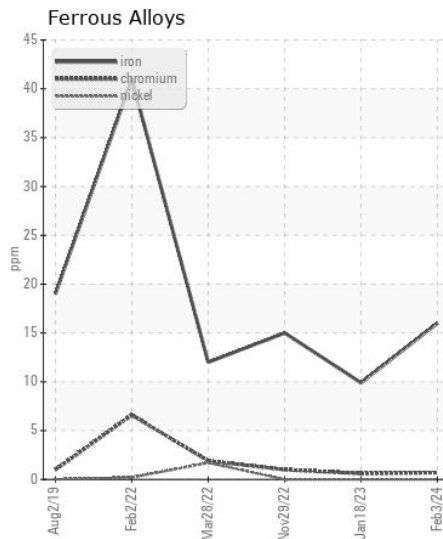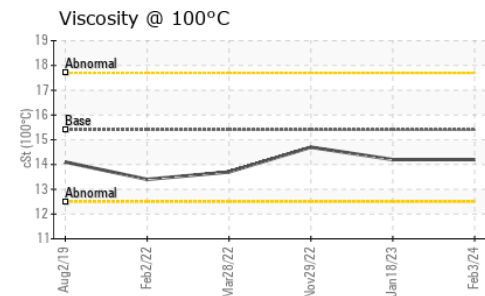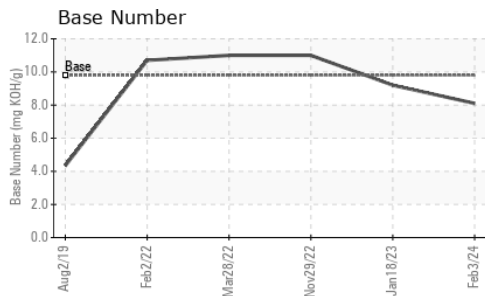

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0103975  
**Lab Number** : 06084256  
**Unique Number** : 10871701  
**Test Package** : FLEET

**Received** : 08 Feb 2024  
**Tested** : 09 Feb 2024  
**Diagnosed** : 09 Feb 2024 - Wes Davis

**GFL Environmental - 865 - East Mount Hauling**  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: Saul Castillo  
 saul.castillo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: