



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
INTERNATIONAL 8027502
Component
Diesel Engine
Fluid
VALVOLINE 15W40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0035090	IL05911762	IL05762734
Sample Date		Client Info		17 Jan 2024	20 Jul 2023	02 Feb 2023
Machine Age	mls	Client Info		399327	352812	309041
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	N/A
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				ATTENTION	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	71	45	20
Chromium	ppm	ASTM D5185m	>20	2	2	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	4	6	4
Lead	ppm	ASTM D5185m	>40	12	9	<1
Copper	ppm	ASTM D5185m	>330	2	<1	<1
Tin	ppm	ASTM D5185m	>15	2	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	6	5
Potassium	ppm	ASTM D5185m	>20	3	8	7
Fuel	%	ASTM D3524	>5	0.5	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.6	0.6	0.3
Nitration	Abs/cm	*ASTM D7624	>20	11.3	12.6	10.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.7	27.1	21.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		3	3	3
Boron	ppm	ASTM D5185m	39	15	15	37
Barium	ppm	ASTM D5185m	1	0	0	0
Molybdenum	ppm	ASTM D5185m	49	102	61	57
Manganese	ppm	ASTM D5185m	1	<1	<1	<1
Magnesium	ppm	ASTM D5185m	616	591	688	711
Calcium	ppm	ASTM D5185m	1554	1344	1285	1127
Phosphorus	ppm	ASTM D5185m	899	813	713	697
Zinc	ppm	ASTM D5185m	1069	993	940	869
Sulfur	ppm	ASTM D5185m	2624	2388	2315	2254
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.8	26.0	18.7
Base Number (BN)	mg KOH/g	ASTM D2896	6.9	3.3	4.3	7.9
Visc @ 100°C	cSt	ASTM D445	13.6	▲ 10.8	13.3	13.7

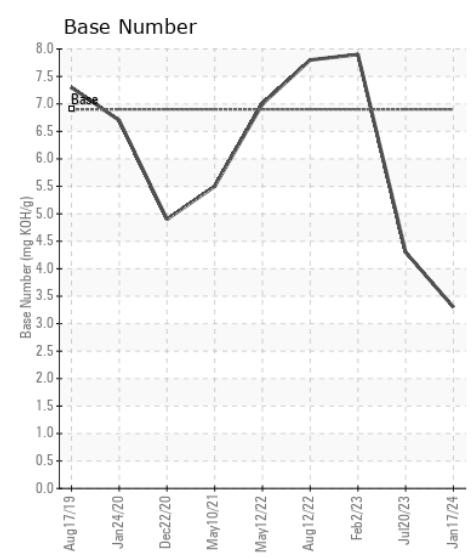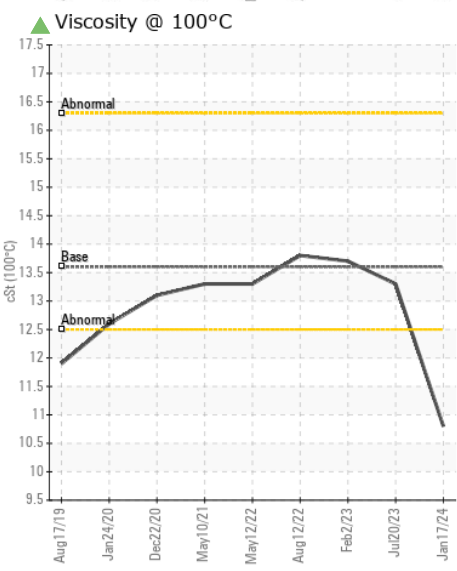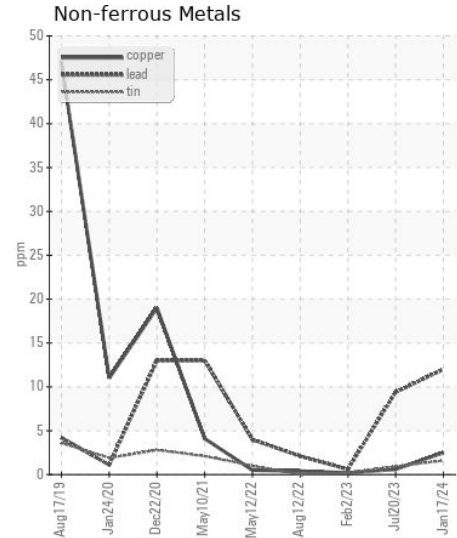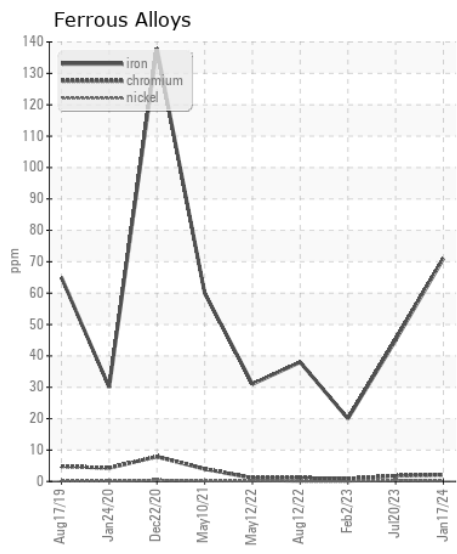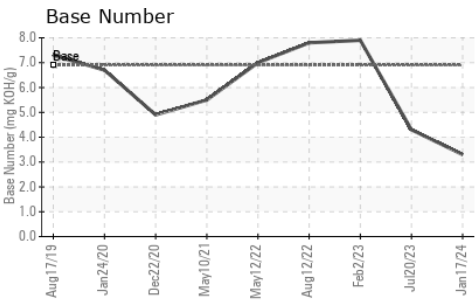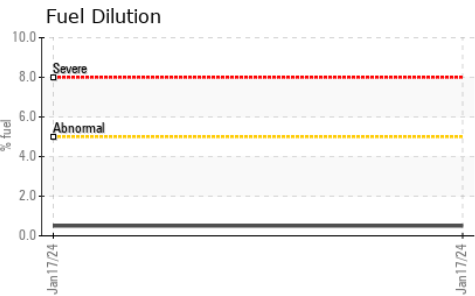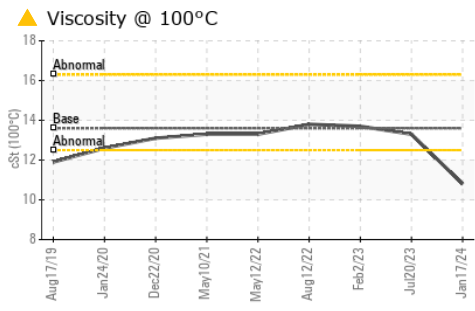

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0035090 **Received** : 09 Feb 2024
Lab Number : 06084510 **Tested** : 13 Feb 2024
Unique Number : 10871955 **Diagnosed** : 13 Feb 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

TAMPA IDEALEASE
 5951 ORIENT ROAD
 TAMPA, FL
 US 33610-9565
 Contact: Russ Cook
 russcook@idealease.com
 T: (813)626-9285
 F: (844)270-1356

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)