



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**UPAP-Orlando [673558]**

Machine Id  
**626519 VOLVO 626519**

Component  
**Diesel Engine**

Fluid  
**VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP438079</b>	DJJ0005260	---
Sample Date		Client Info		<b>06 Feb 2024</b>	14 Jun 2023	---
Machine Age	hrs	Client Info		<b>1878</b>	821	---
Oil Age	hrs	Client Info		<b>0</b>	821	---
Filter Age	hrs	Client Info		<b>0</b>	821	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>27</b>	29	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	4	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	8	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>4</b>	9	---
Tin	ppm	ASTM D5185m	>15	<b>2</b>	3	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>9</b>	17	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	---
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.8</b>	8.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.3</b>	22.0	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	4	---
Boron	ppm	ASTM D5185m	2.5	<b>21</b>	34	---
Barium	ppm	ASTM D5185m	0.0	<b>26</b>	2	---
Molybdenum	ppm	ASTM D5185m	0.7	<b>46</b>	40	---
Manganese	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	4	---
Magnesium	ppm	ASTM D5185m	256	<b>511</b>	655	---
Calcium	ppm	ASTM D5185m	2057	<b>1631</b>	1566	---
Phosphorus	ppm	ASTM D5185m	935	<b>998</b>	972	---
Zinc	ppm	ASTM D5185m	1223	<b>1132</b>	1181	---
Sulfur	ppm	ASTM D5185m	4079	<b>3107</b>	4051	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.3</b>	19.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>9.1</b>	9.5	---
Visc @ 100°C	cSt	ASTM D445	15.0	<b>13.1</b>	13.0	---

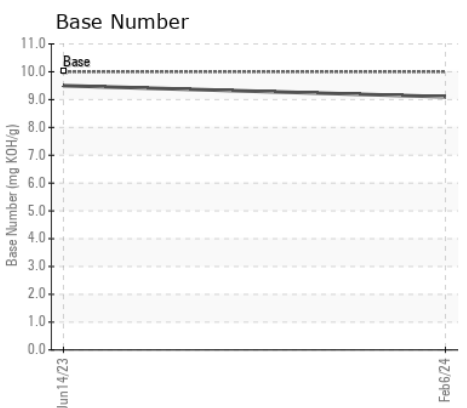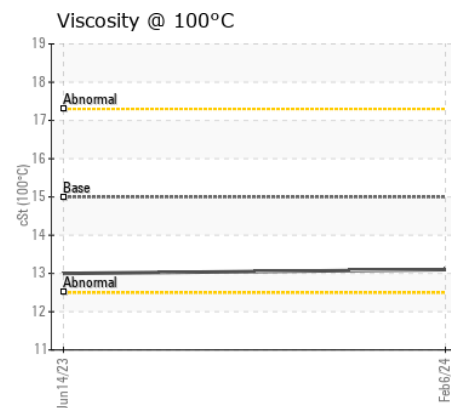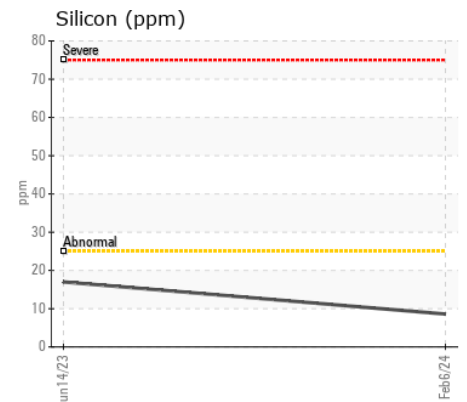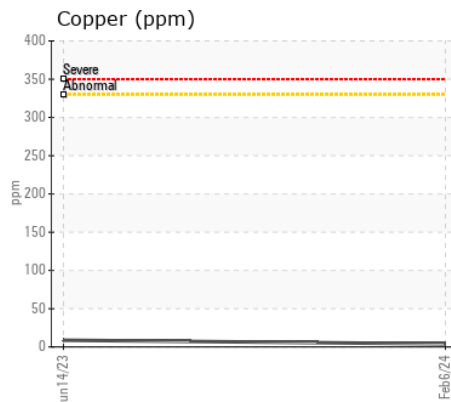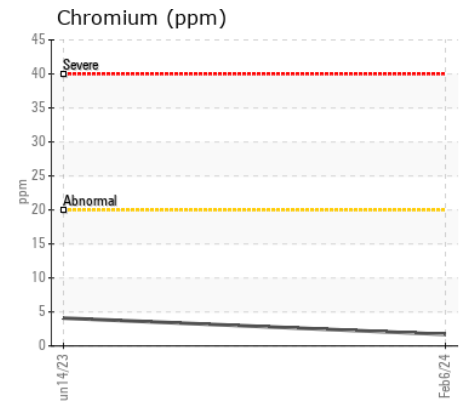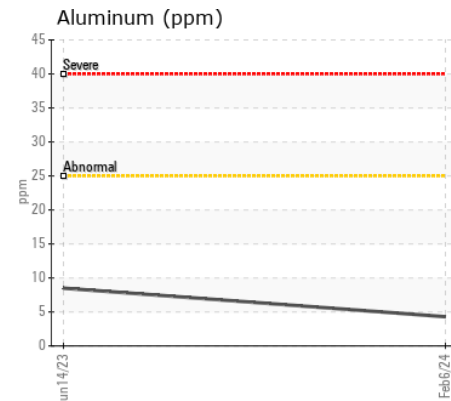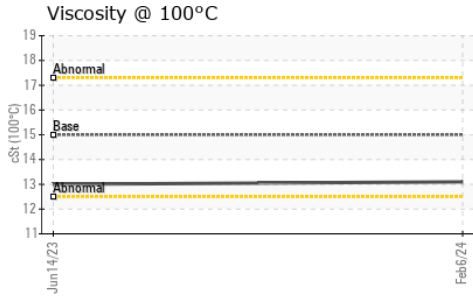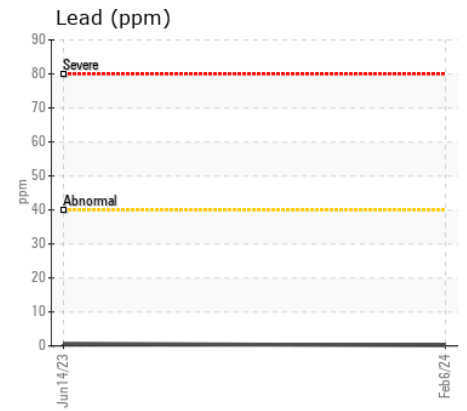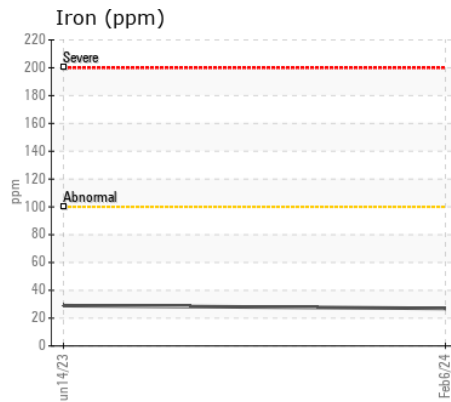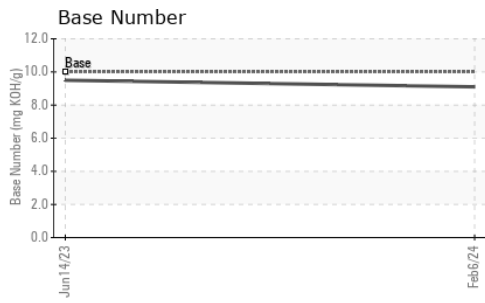

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP438079  
**Lab Number** : 06084570  
**Unique Number** : 10872015  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Received** : 09 Feb 2024  
**Tested** : 12 Feb 2024  
**Diagnosed** : 12 Feb 2024 - Wes Davis

**U-PULL-AND-PAY LLC - ORLANDO**  
 1157 JETSTREAM DRIVE  
 ORLANDO, FL  
 US 32824

Contact: NILDA RIOS  
 nilda.rios@upullandpay.com  
 T: (407)473-3798  
 F: (407)856-4029

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)