



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CAPT MICHAEL D COLLINS (S/N 85Z07829)

Component
Port Genset

Fluid
CHEVRON DELO 400 XLE 15W40 (7 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0050057	MW0050352	MW0050214
Sample Date		Client Info		29 Jan 2024	21 Dec 2023	28 Oct 2023
Machine Age	hrs	Client Info		48274	116643	0
Oil Age	hrs	Client Info		500	482	500
Filter Age	hrs	Client Info		500	482	500
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	8	6	5
Chromium	ppm	ASTM D5185m	>4	<1	0	<1
Nickel	ppm	ASTM D5185m	>2	0	0	<1
Titanium	ppm	ASTM D5185m		18	14	13
Silver	ppm	ASTM D5185m	>5	<1	0	0
Aluminum	ppm	ASTM D5185m	>12	2	<1	1
Lead	ppm	ASTM D5185m	>17	<1	0	1
Copper	ppm	ASTM D5185m	>70	1	<1	<1
Tin	ppm	ASTM D5185m	>15	0	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	3	3	4
Potassium	ppm	ASTM D5185m	>20	6	2	3
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.6	0.4	0.2
Nitration	Abs/cm	*ASTM D7624	>20	11.1	10.7	10.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.1	21.1	20.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	2	<1
Boron	ppm	ASTM D5185m		78	75	64
Barium	ppm	ASTM D5185m		25	0	0
Molybdenum	ppm	ASTM D5185m		33	30	30
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		735	782	721
Calcium	ppm	ASTM D5185m		1544	1632	1471
Phosphorus	ppm	ASTM D5185m	760	783	739	686
Zinc	ppm	ASTM D5185m	830	855	876	852
Sulfur	ppm	ASTM D5185m	2770	3258	3142	3047
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.7	18.3	18.3
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	7.3	7.6	7.4
Visc @ 100°C	cSt	ASTM D445	14.9	14.0	13.9	12.8

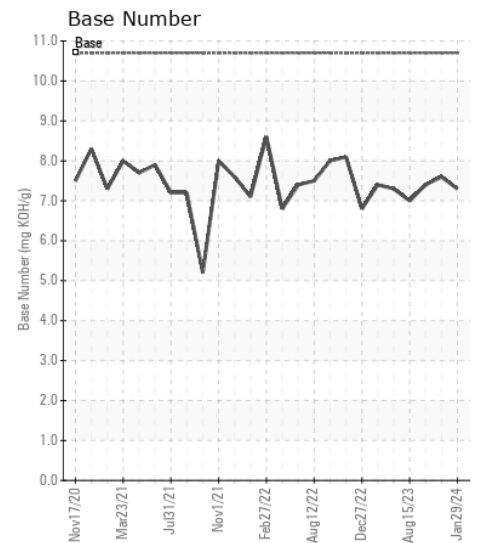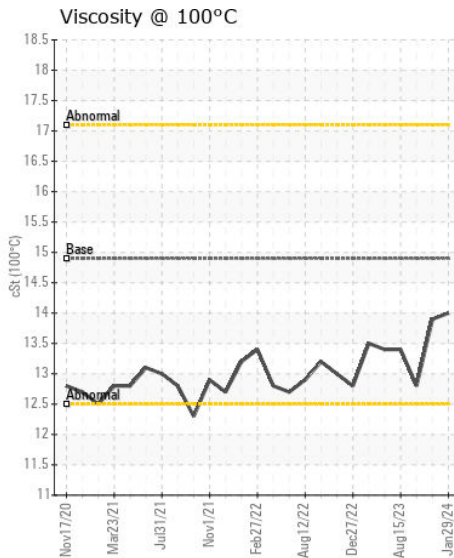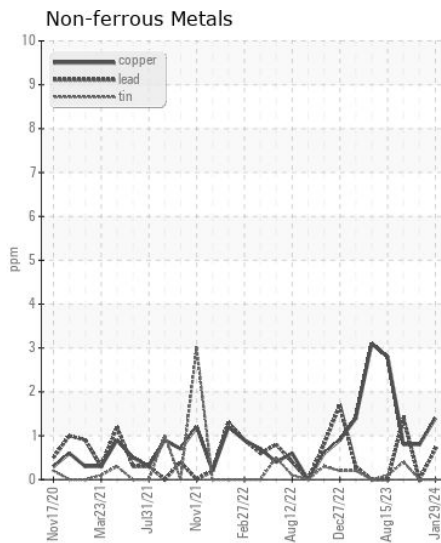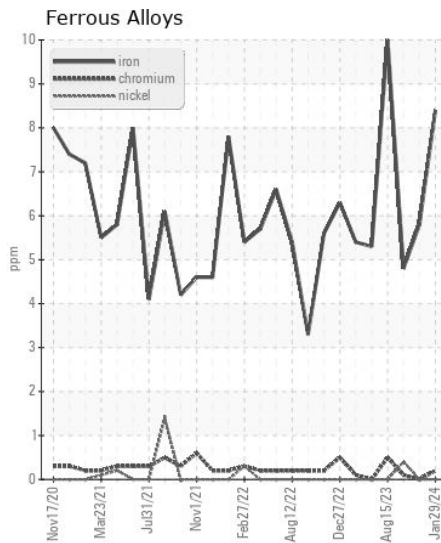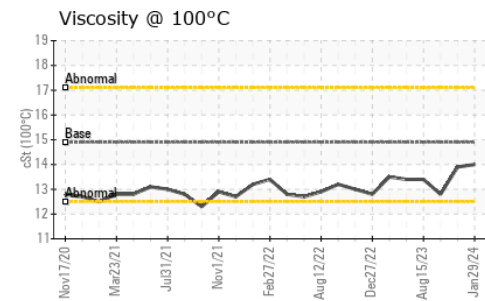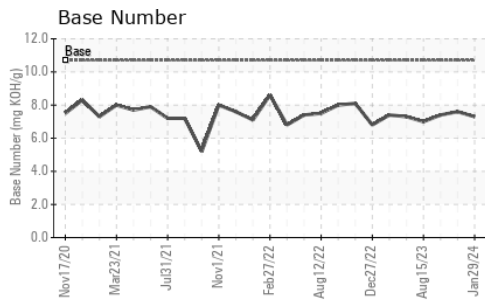

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0050057
Lab Number : 06084591
Unique Number : 10872036
Test Package : MAR 2

Received : 09 Feb 2024
Tested : 12 Feb 2024
Diagnosed : 12 Feb 2024 - Sean Felton

AMERICAN COMMERCIAL LINES
 PO BOX 610, 1701 E. MARKET STREET
 JEFFERSONVILLE, IN
 US 47130
 Contact: RONALD SCHNEIDER
 ronald.schneider@bargaeacbl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (812)288-1644