



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
BIG EASY
Component
2 Main Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0064924	MW0057158	MW0036776
Sample Date		Client Info		24 Jan 2024	16 Aug 2023	10 Jan 2023
Machine Age	hrs	Client Info		18501	17034	15282
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	N/A
Filter Changed		Client Info		Not Changd	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	0	7	8
Chromium	ppm	ASTM D5185m	>8	0	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>3	13	15	14
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	<1	1	1
Lead	ppm	ASTM D5185m	>18	1	<1	2
Copper	ppm	ASTM D5185m	>80	0	<1	<1
Tin	ppm	ASTM D5185m	>14	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	0	4	4
Potassium	ppm	ASTM D5185m	>20	3	4	3
Fuel	%	ASTM D3524	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.7	0.8	0.7
Nitration	Abs/cm	*ASTM D7624	>20	9.7	9.4	9.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.3	18.4	19.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	4	3	4
Boron	ppm	ASTM D5185m	250	77	73	66
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	25	32	33
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	644	694	737
Calcium	ppm	ASTM D5185m	3000	1444	1604	1743
Phosphorus	ppm	ASTM D5185m	1150	674	732	771
Zinc	ppm	ASTM D5185m	1350	787	875	950
Sulfur	ppm	ASTM D5185m	4250	2838	3060	3989
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.6	12.6	14.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.7	7.6	7.5
Visc @ 100°C	cSt	ASTM D445	14.4	12.1	12.4	12.3

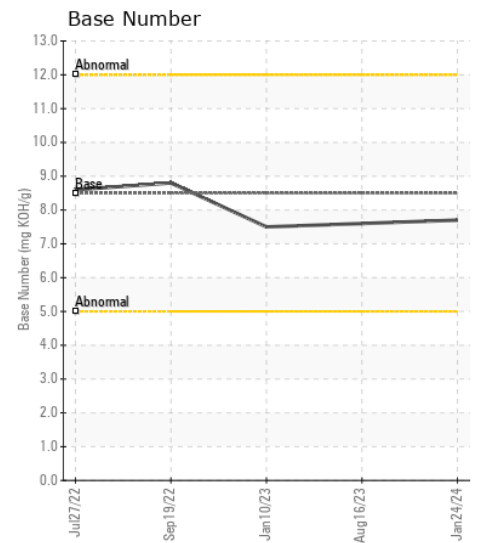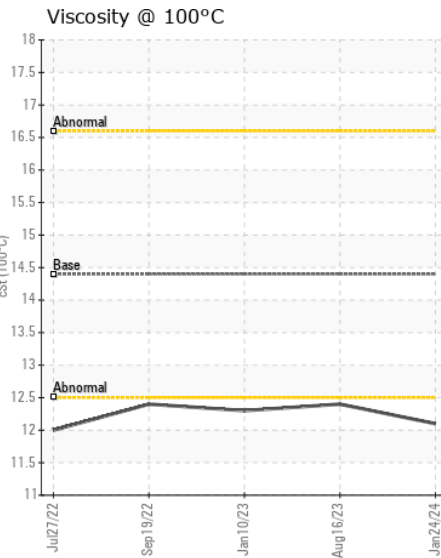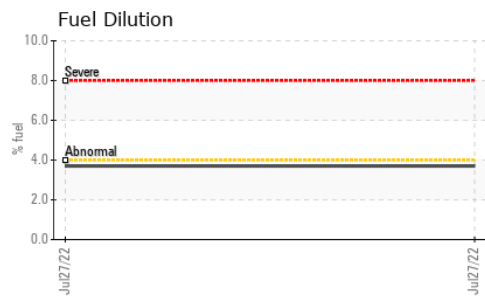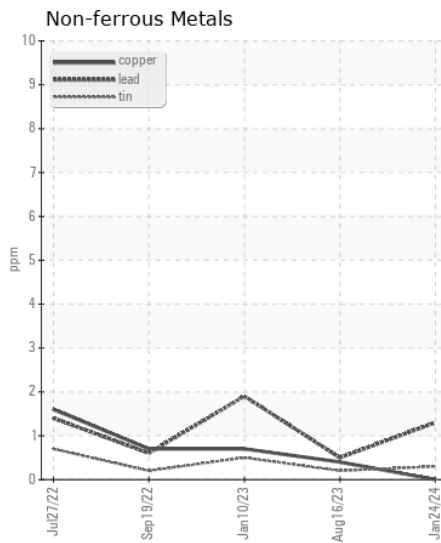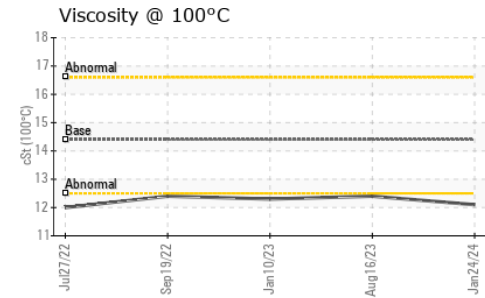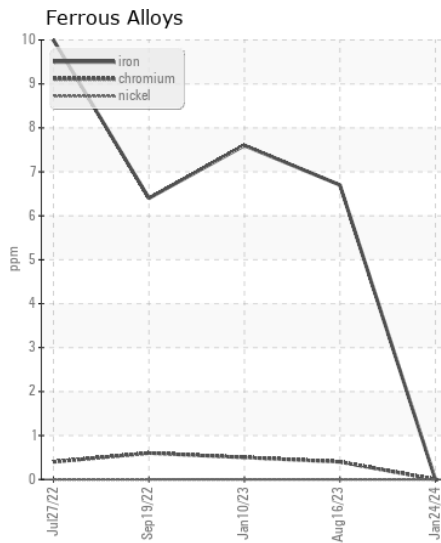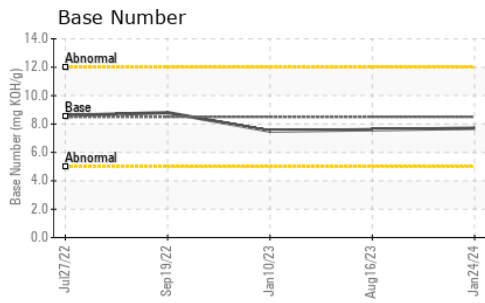

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW0064924

Lab Number : 06084628

Unique Number : 10872073

Test Package : MAR 2 (Additional Tests: FuelDilution)

Received : 09 Feb 2024

Tested : 12 Feb 2024

Diagnosed : 12 Feb 2024 - Sean Felton

AMERICAN RIVER TRANSPORTATION CO.

P.O. BOX 2889

ST. LOUIS, MO

US 63111

Contact: BRIAN GRIEWING

brian.griewing@adm.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (314)481-5278