



WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	SEVERE

Machine Id
LOUISIANA LAGNIAPPE

Component
Port Main Engine

Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (40 GAL)

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0052159	MW0003437	MW0003428
Sample Date		Client Info		02 Feb 2024	30 Nov 2023	16 Oct 2023
Machine Age	hrs	Client Info		13522	12068	11028
Oil Age	hrs	Client Info		1454	1466	575
Filter Age	hrs	Client Info		1454	1466	575
Oil Changed		Client Info		Changed	Changed	Not Changd
Filter Changed		Client Info		Changed	Changed	Not Changd
Sample Status				SEVERE	SEVERE	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	4	8	4
Chromium	ppm	ASTM D5185m	>8	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>3	8	9	10
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	<1	<1	1
Lead	ppm	ASTM D5185m	>18	16	9	2
Copper	ppm	ASTM D5185m	>80	<1	<1	0
Tin	ppm	ASTM D5185m	>14	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185m	>20	0	3	3
Potassium	ppm	ASTM D5185m	>20	3	0	2
Fuel	%	ASTM D3524	>4.0	17.1	16.6	6.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.4	0.3	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.9	9.7	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.3	18.9	18.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m	>75	8	3	3
Boron	ppm	ASTM D5185m	151	58	76	108
Barium	ppm	ASTM D5185m	0.4	0	0	0
Molybdenum	ppm	ASTM D5185m	250	20	24	27
Manganese	ppm	ASTM D5185m		1	0	<1
Magnesium	ppm	ASTM D5185m	0	444	480	530
Calcium	ppm	ASTM D5185m	2046	1165	1424	1559
Phosphorus	ppm	ASTM D5185m	1043	526	611	718
Zinc	ppm	ASTM D5185m	943	639	741	852
Sulfur	ppm	ASTM D5185m	5012	2205	2738	2983
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.7	16.0	13.8
Base Number (BN)	mg KOH/g	ASTM D2896	12.5	6.6	6.1	7.7
Visc @ 100°C	cSt	ASTM D445	14.4	8.8	9.6	12.1

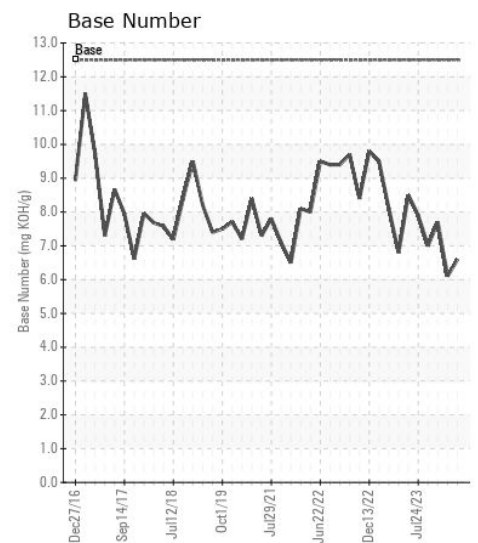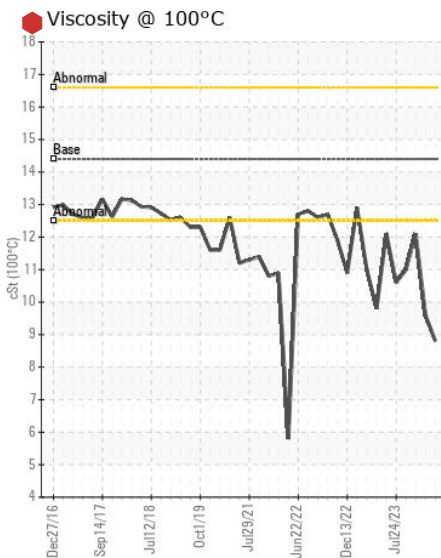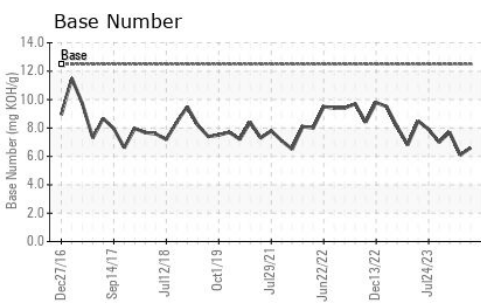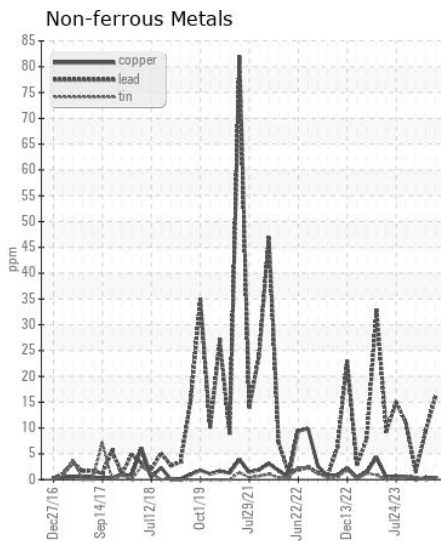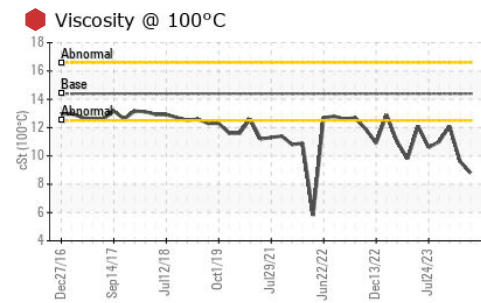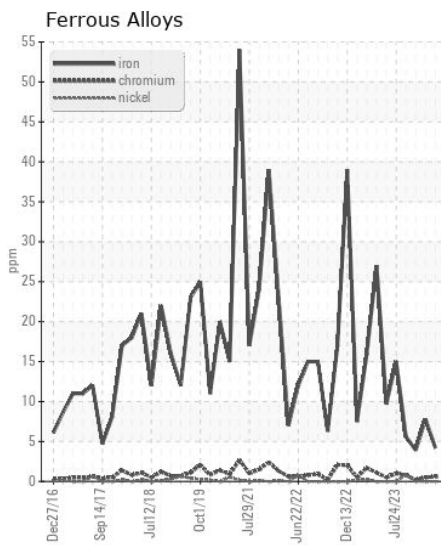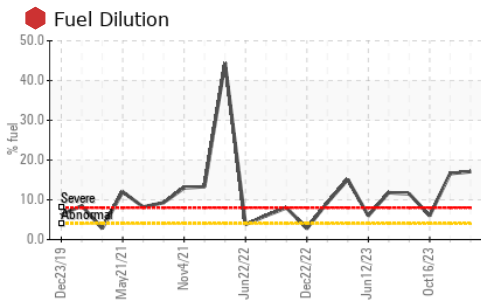

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0052159 **Received** : 09 Feb 2024
Lab Number : 06084630 **Tested** : 13 Feb 2024
Unique Number : 10872075 **Diagnosed** : 13 Feb 2024 - Wes Davis
Test Package : MAR 2 (Additional Tests: PercentFuel)

AMERICAN RIVER TRANSPORTATION CO
 8400 RIVER RD, PO BOX 656
 WESTWEGO, LA
 US 70094-2317
 Contact: KEVIN CHIASSON
 kevin.chiasson@adm.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: