



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 4 - Fairmont
 Machine Id
JOHN DEERE 245P 1FF245PAKPF000268
 Component
Hydraulic System
 Fluid
HITACHI HYDRAULIC SUPER EX 46HN (63 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample
 Comment: hydraulic system filter caddied)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0047782	LEC0046583	LEC0043938
Sample Date		Client Info		07 Feb 2024	09 Jan 2024	03 Oct 2023
Machine Age	hrs	Client Info		248	246	203
Oil Age	hrs	Client Info		248	246	203
Filter Age	hrs	Client Info		248	246	203
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Filter Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	14	15	12
Iron	ppm	ASTM D5185m	>32	3	3	3
Chromium	ppm	ASTM D5185m	>9	0	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>9	0	<1	<1
Lead	ppm	ASTM D5185m	>28	0	0	<1
Copper	ppm	ASTM D5185m	>50	3	2	3
Tin	ppm	ASTM D5185m	>5	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>11	2	3	3
Potassium	ppm	ASTM D5185m	>20	0	0	2
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	39317	▲ 80463	31788
Particles >6µm		ASTM D7647	>20000	2560	19207	1026
Particles >14µm		ASTM D7647	>640	35	▲ 1330	22
Particles >21µm		ASTM D7647	>160	8	▲ 286	7
Particles >38µm		ASTM D7647	>40	0	12	1
Particles >71µm		ASTM D7647	>10	0	1	0
Oil Cleanliness		ISO 4406 (c)	>23/21/16	22/19/12	▲ 24/21/18	22/17/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	1	<1	0
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		1	<1	2
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		0	0	1
Calcium	ppm	ASTM D5185m		13	33	19
Phosphorus	ppm	ASTM D5185m	827	530	538	537
Zinc	ppm	ASTM D5185m	0	68	77	79
Sulfur	ppm	ASTM D5185m	13	281	312	304
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.12	0.13	0.11
Visc @ 40°C	cSt	ASTM D445	47	46.2	46.0	45.8

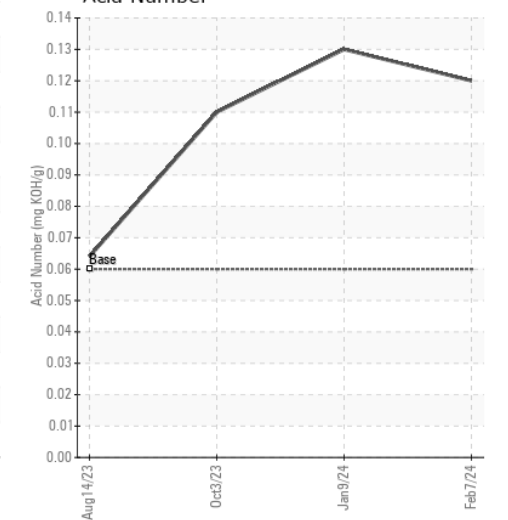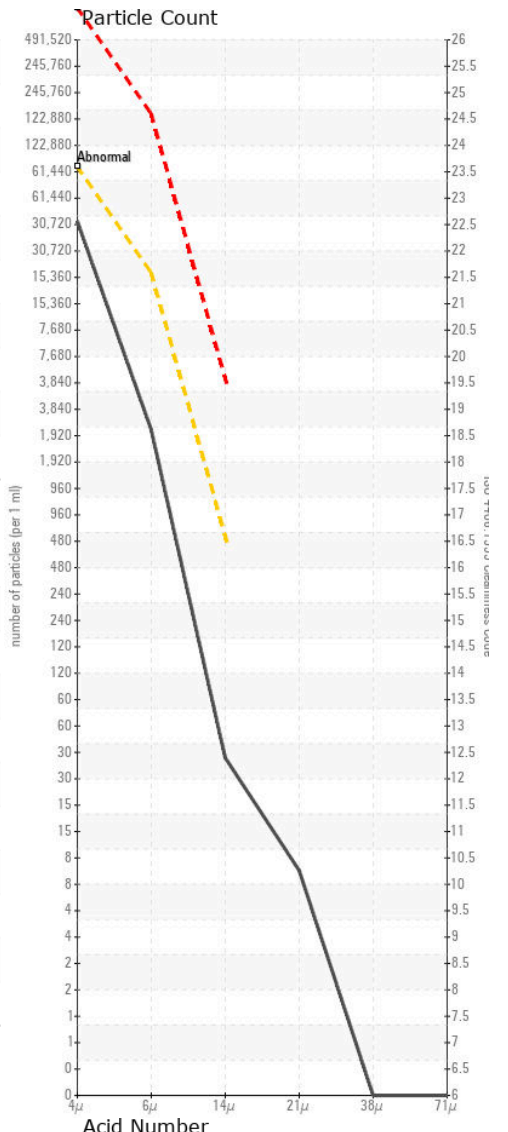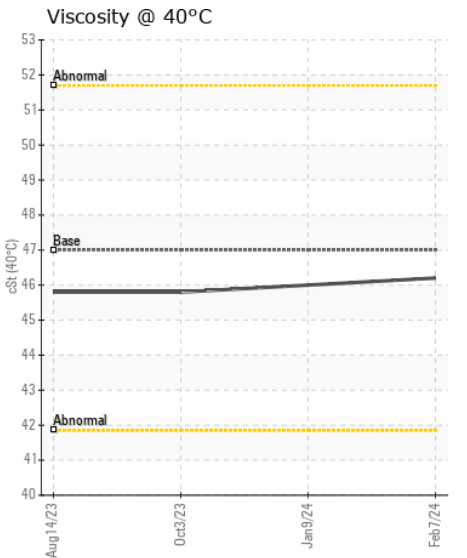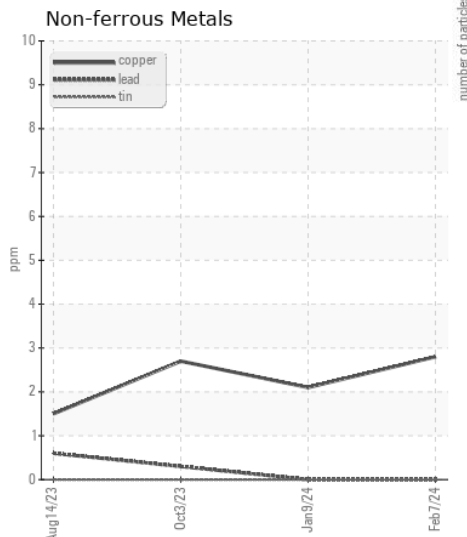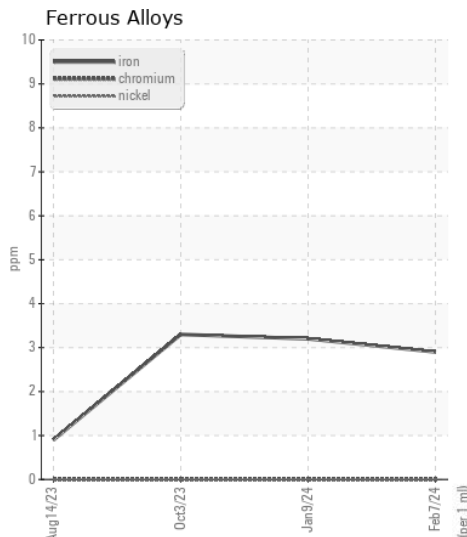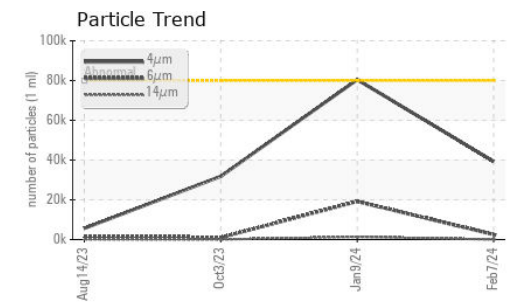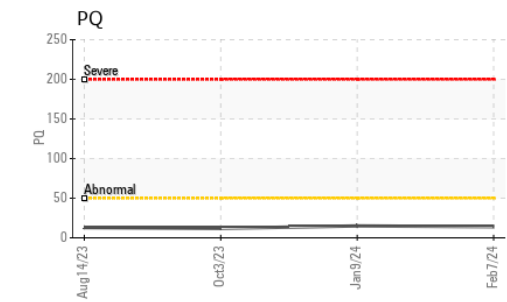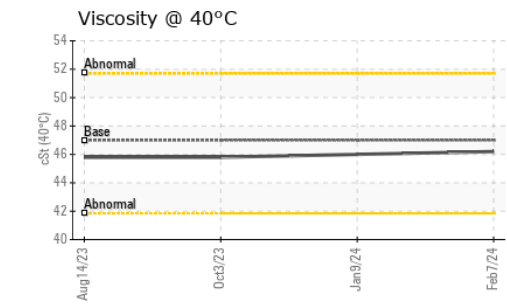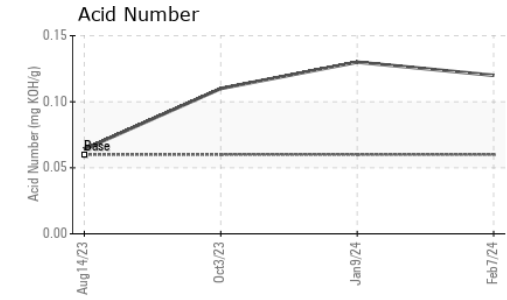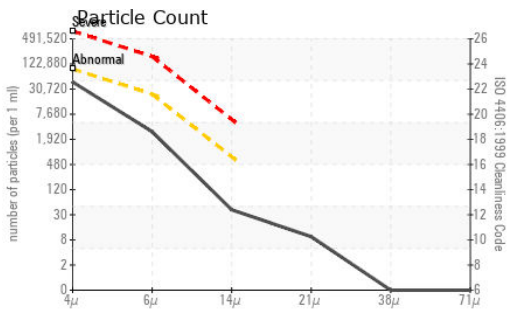

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0047782 **Received** : 09 Feb 2024
Lab Number : 06084678 **Tested** : 12 Feb 2024
Unique Number : 10872123 **Diagnosed** : 12 Feb 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570