



VOLVO

OIL ANALYSIS REPORT

| | |
|-----------------|-----------|
| WEAR | NORMAL |
| CONTAMINATION | ATTENTION |
| FLUID CONDITION | NORMAL |

Machine Id
VOLVO L260 001349

Component
Hydraulic System

Fluid
VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | VCP430400 | --- | --- |
| Sample Date | | Client Info | | 01 Dec 2023 | --- | --- |
| Machine Age | hrs | Client Info | | 0 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | Changed | --- | --- |
| Sample Status | | | | ATTENTION | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|------|-----|-----|
| Iron | ppm | ASTM D5185m | >20 | 3 | --- | --- |
| Chromium | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Lead | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m | >75 | 2 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION










There is a light amount of silt (particulates < 14 microns in size) present in the oil.

| | | | | | | |
|------------------|--------|--------------|-----------|----------|-----|-----|
| Silicon | ppm | ASTM D5185m | >20 | 2 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 0 | --- | --- |
| Water | | WC Method | >0.1 | NEG | --- | --- |
| Particles >4µm | | ASTM D7647 | >5000 | 5524 | --- | --- |
| Particles >6µm | | ASTM D7647 | >1300 | 794 | --- | --- |
| Particles >14µm | | ASTM D7647 | >160 | 36 | --- | --- |
| Particles >21µm | | ASTM D7647 | >40 | 9 | --- | --- |
| Particles >38µm | | ASTM D7647 | >10 | 0 | --- | --- |
| Particles >71µm | | ASTM D7647 | >3 | 0 | --- | --- |
| Oil Cleanliness | | ISO 4406 (c) | >19/17/14 | 20/17/12 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | --- | --- |

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|------|-----|-----|
| Sodium | ppm | ASTM D5185m | | <1 | --- | --- |
| Boron | ppm | ASTM D5185m | 14 | 0 | --- | --- |
| Barium | ppm | ASTM D5185m | 0.0 | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 0.0 | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | 0.0 | 0 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 2.6 | 0 | --- | --- |
| Calcium | ppm | ASTM D5185m | 49 | 43 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 354 | 305 | --- | --- |
| Zinc | ppm | ASTM D5185m | 419 | 396 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 3719 | 881 | --- | --- |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.18 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | 46 | 43.6 | --- | --- |

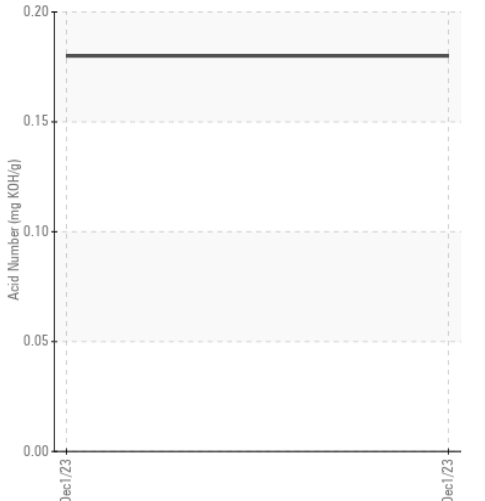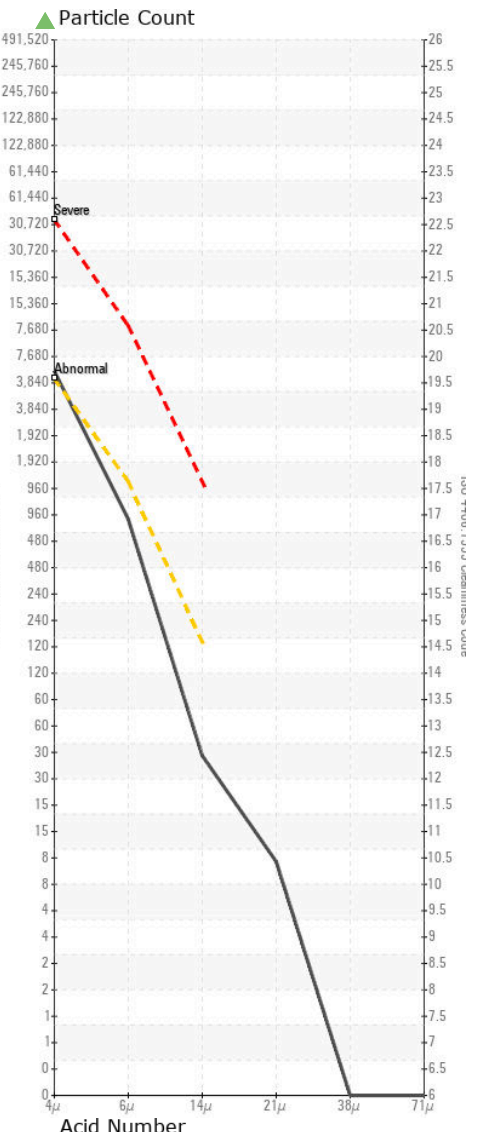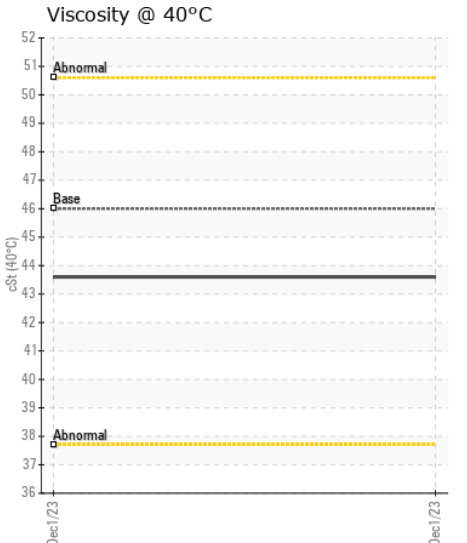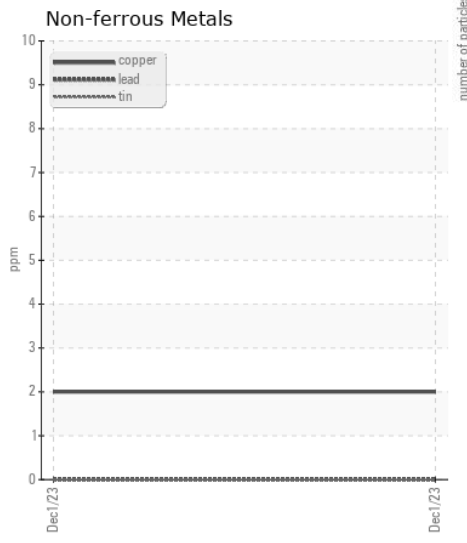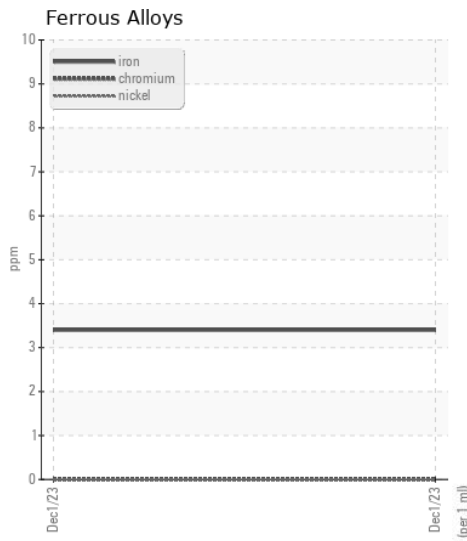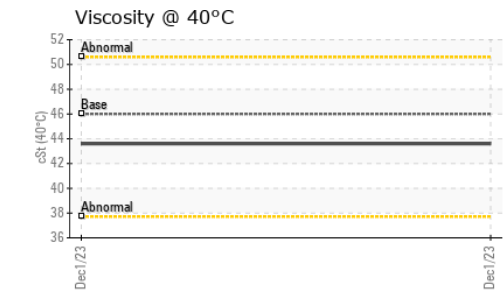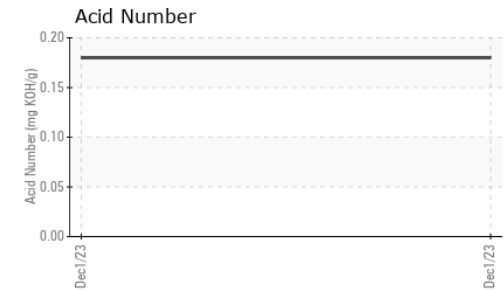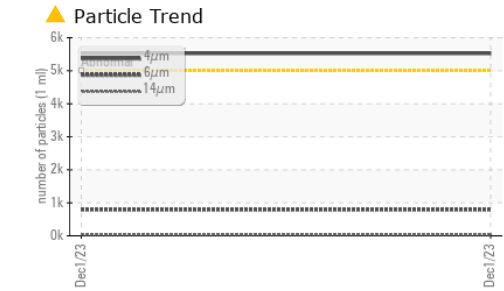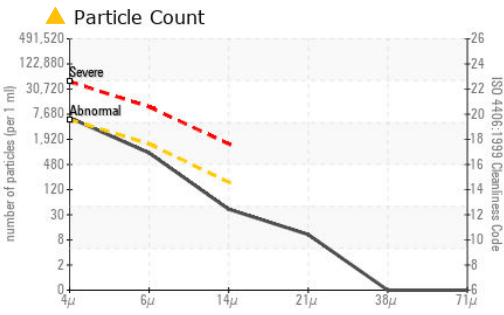

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP430400 **Received** : 09 Feb 2024
Lab Number : 06084732 **Tested** : 12 Feb 2024
Unique Number : 10872177 **Diagnosed** : 12 Feb 2024 - Wes Davis
Test Package : MOB 2

COWIN EQUIPMENT COMPANY
 P.O. DRAWER 9367
 MONTGOMERY, AL
 US 36108
 Contact: BRYAN DICKS
 bdicks@cowin.com
 T: (334)262-6642
 F: (334)269-1514

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)